
KARTING NSW

Engine Technical Specification

IAME X30



Revision 4.1 Date: 15/10/2024

Table of Contents

1	PREAMBLE	3
2	ENGINE	4
3	TECHNICAL INFORMATION	6
D	PHOTOS, DRAWINGS & GRAPHS	8
D1	CYLINDER UNIT	8
D2	CONROD, CRANKCASE	12
D3	BALANCE SHAFT	17
D4	REED VALVE & CLUTCH	19
D5	EXHAUST SYSTEM.....	24
D6	STARTER.....	31
D7	ELECTRICAL SYSTEM	32
D8	RADIATORS	43
4	ADDITIONAL INFORMATION.....	46
5	CARBURETTOR - TILLOTSON HW-27A.....	62
6	CARBURETTOR - TRYTON HB27-C.....	67
7	APPENDIX.....	71
8	UPDATE LIST	75

1. PREAMBLE

This document provides the Technical Specification for the lame X30 engine, as approved by Karting NSW.

This engine is approved for use in the classes as defined in the KNSW Rule Book.

Unless otherwise specified below, the engine must be original in all components according to the lame X30 specifications. Neither the engine nor any of its ancillary components may be modified other than in accordance with the KNSW Rule Book and this Technical Specification.

The General Technical Specification contains the manufacturer's engine specification and must be read in conjunction with the Compliance Specification which defines additional specifications as approved by KNSW.

The engine must always be presented and used in conformity with this Technical Specification and the KNSW Rule Book.


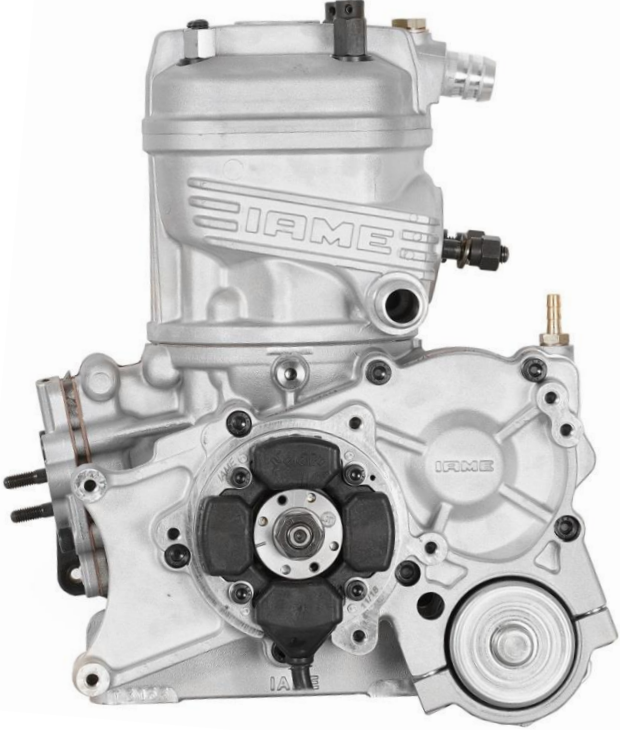
ANY ALTERATIONS / MODIFICATIONS ARE STRICTLY PROHIBITED EXCEPT AS SPECIFICALLY AUTHORISED WITHIN THESE SPECIFICATIONS.

IF THESE SPECIFICATIONS DO NOT SAY YOU CAN MAKE A MODIFICATION, THEN YOU CANNOT.

Note: Registration does not imply or guarantee use in a class or classes. Application for use in a class or classes must be applied for after Homologation and Registration approvals

ENGINE			
Manufacturer	<u>IAME S.P.A - ZINGONIA</u>	Category	
Make	<u>IAME</u>	Homologation Period	6 years
Model, Type	<u>X30 125cc RL - TAG</u>	Pages	82

This homologation sheet reproduces description, illustrations and dimensions of the engine at the time of the KNSW Homologation. All motors must be manufactured within these dimensions

ENGINE PHOTO - DRIVE SIDE	ENGINE PHOTO - OPPOSITE SIDE
	

	<p><i>AUTHORISED BY KARTING NSW</i></p>
	<p>Approved by G. Abbott Karting NSW State Technical Officer</p> <p>15th October 2024</p>

PHOTO OF THE ENGINE FROM THE BACK

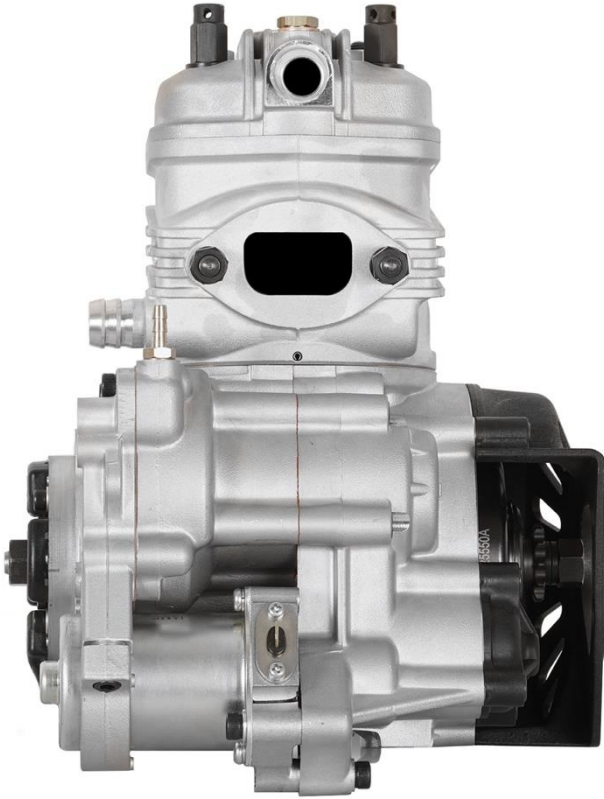


PHOTO OF THE ENGINE FROM THE FRONT

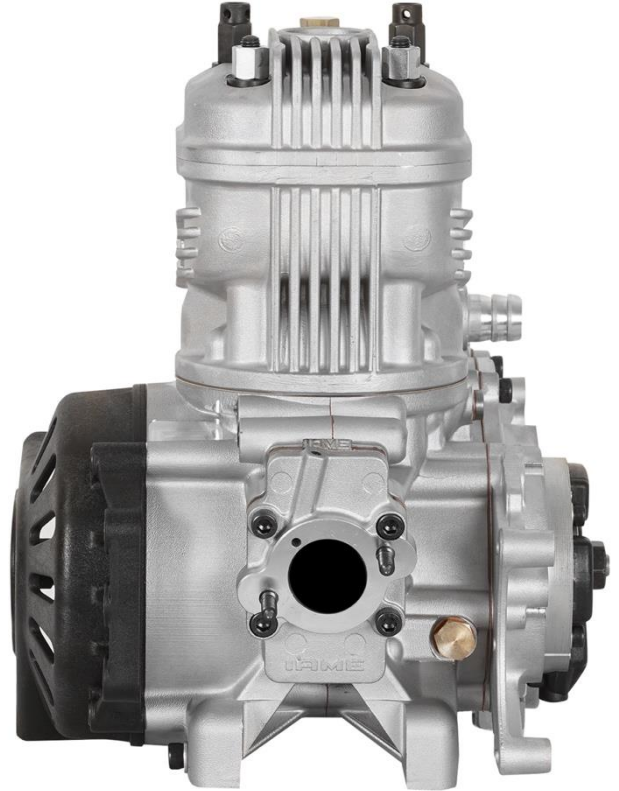


PHOTO OF THE ENGINE FROM ABOVE


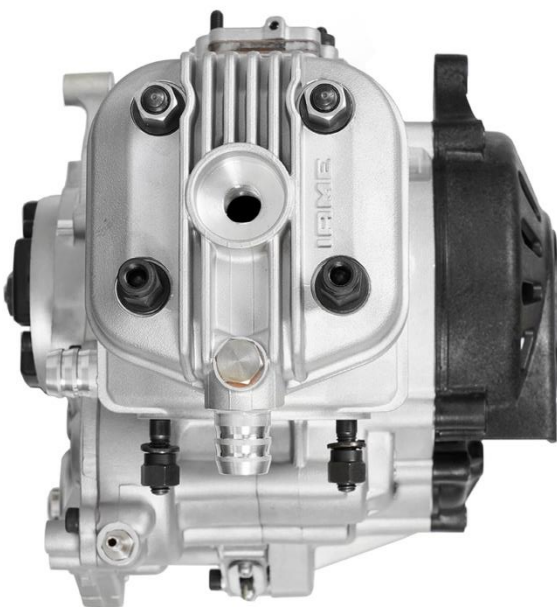


PHOTO OF THE ENGINE FROM BELOW

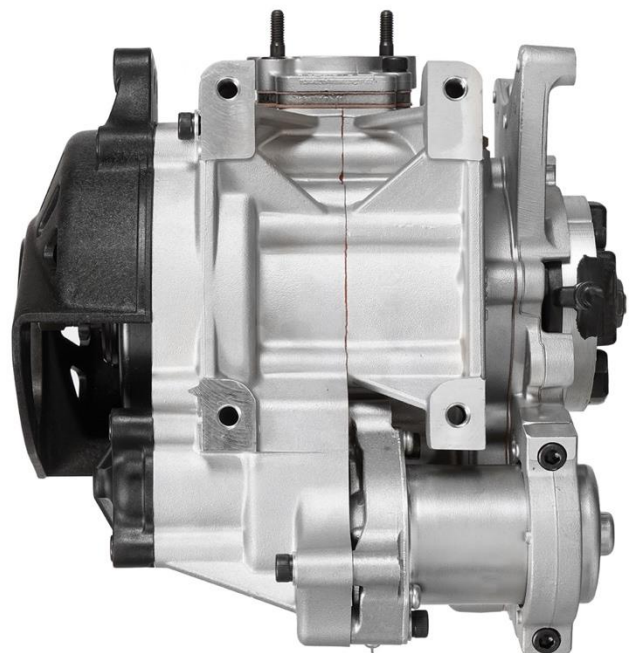

TECHNICAL INFORMATION

A	CHARACTERISTICS	
<i>The number of decimal places must be 2 or comply with the relevant tolerance.</i>		<i>Tolerances & remarks</i>
Cylinder		
<i>Volume of cylinder</i>	<u>123.67 cm³</u>	<125.00 cm³
<i>Original bore</i>	<u>54.00 mm</u>	--
<i>Theoretical maximum bore</i>	<u>54.28 mm</u>	--
<i>Original Stroke</i>	<u>54.40 mm</u>	--
Crankshaft		
<i>Number of transfer ducts, cylinder / sump</i>	<u>3 / 3</u>	--
<i>Number of exhaust ports / ducts</i>	<u>3 / 3</u>	--
<i>Volume of the combustion chamber (with AUS insert)</i>	<u>10.3 cm³</u>	minimum
<i>Volume of the combustion chamber (with Volumeter & AUS insert)</i>	<u>12.8 cm³</u>	minimum
Balance shaft		
<i>Number of bearings</i>	<u>2</u>	--
<i>Diameter of bearings</i>	<u>30 mm</u>	±0.1mm
<i>Minimum weight of crankshaft</i>	<u>2150 g</u>	minimum
<i>All parts represented on page 12 technical drawing</i>		
Connecting rod		
<i>Connecting rod centreline</i>	<u>102 mm</u>	±0.1mm
<i>Diameter of big end</i>	<u>26 mm</u>	±0.05mm
<i>Diameter of small end</i>	<u>18 mm</u>	±0.05mm
<i>Min. weight of the connecting rod</i>	<u>110 g</u>	minimum

Piston		
Number of piston rings	<u>1</u>	
Min. weight of the bare piston (ring included)	<u>128 g</u>	minimum
Gudgeon pin		
Diameter	<u>14 mm</u>	±0.05mm
Length	<u>44 mm</u>	±0.15mm
Minimum weight	<u>28.0 g</u>	Minimum
Clutch		
Minimum weight	<u>950 g</u>	minimum
All the parts represented on the page 15 technical drawing		


B	OPENING ANGLES	
Of the inlet (main transfer ports)	<u>126°</u>	±2°
Of the inlet (3 th transfer duct engine)	<u>127°</u>	±2°
Of the exhaust	<u>177.5°</u>	MAX.
Of the boosters	<u>177.5°</u>	MAX.

C	MATERIAL
Cylinder head	<u>ALUMINIUM</u>
Cylinder	<u>ALUMINIUM</u>
Cylinder wall	<u>CAST IRON</u>
Sump	<u>ALUMINIUM</u>
Crankshaft	<u>STEEL</u>
Connecting rod	<u>STEEL</u>
Piston	<u>ALUMINIUM</u>

D	<i>PHOTOS, DRAWINGS & GRAPHS</i>
---	--------------------------------------

D.1 CYLINDER UNIT


EXPLODED DRAWING OF THE CYLINDER, CYLINDER HEAD AND EXHAUST MANIFOLD UNIT

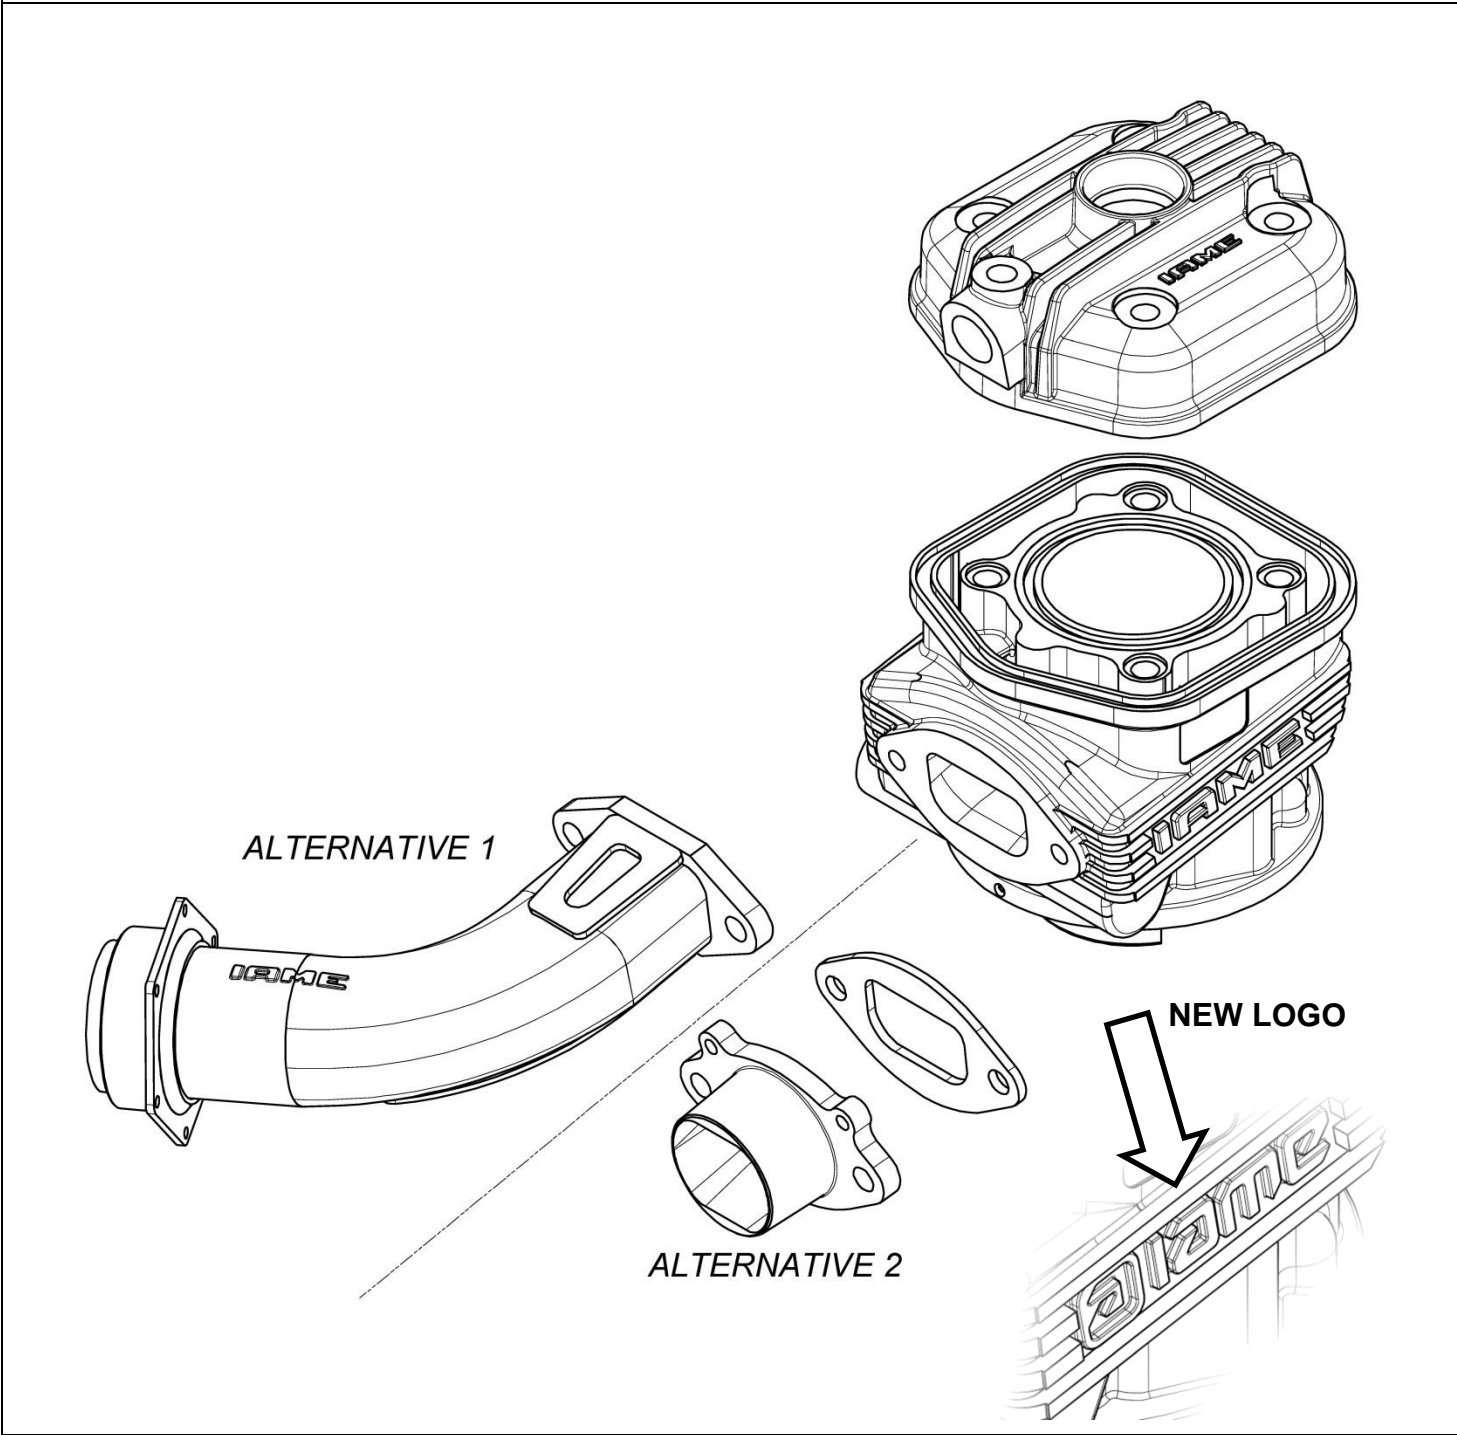

Without screws or gaskets. The aim of the exploded drawings is to identify the principles, the functioning and the whole mechanical unit

... Section D.1

DRAWING OF THE CYLINDER DEVELOPMENT

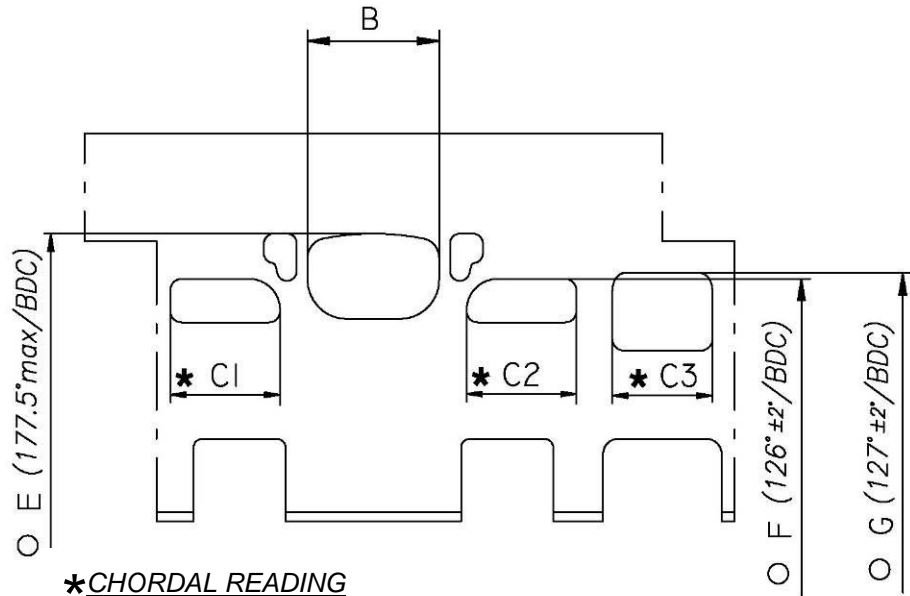



B	≤ 36.5 mm
C1 = C2	≤ 30 mm
C3	≤ 28.5 mm
E	177.5° max
F	126° ± 2°
G	127° ± 2°

*CHORDAL READING

○ ANGULAR READING BY INSERTING A 0.2x5 mm GAUGE


DRAWING OF THE CYLINDER BASE
 (without dimensions)

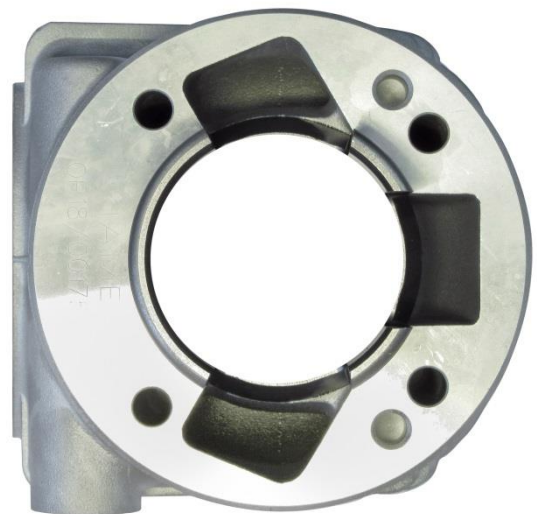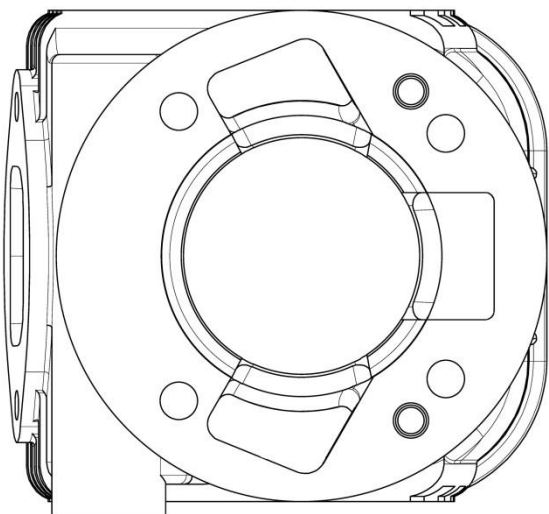PHOTO OF THE CYLINDER BASE



... Section D.1

DRAWING OF THE CYLINDER HEAD AND OF THE COMBUSTION CHAMBER without dimensions

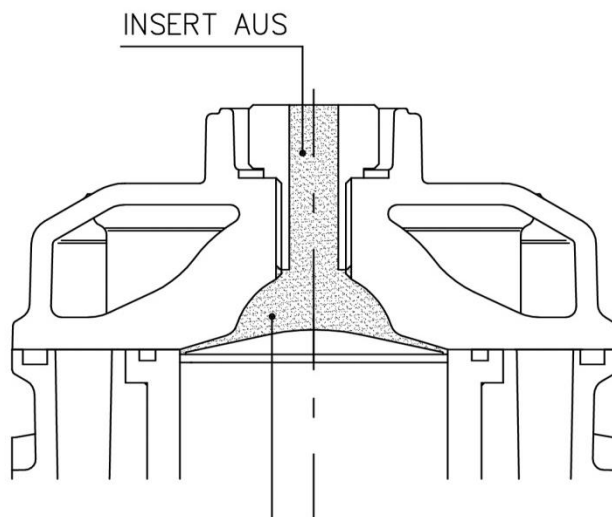

Volume min. 10.3 cm³

COMBUSTION CHAMBER VOLUME TOT. = 10.3 cm³ min.

ATT.: SQUISH MIN. = 0.90 mm
 (measured with Ø2.0mm TIN)

*Combustion chamber volume in the cylinder head
 (with Volumeter and Insert):
 12.8 cm³ min*

PHOTO OF THE CYLINDER HEAD

PHOTO OF THE COMBUSTION CHAMBER IN THE CYLINDER HEAD



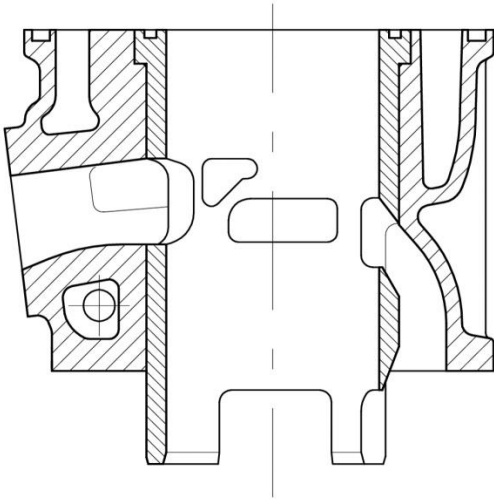
NEW LOGO



... Section D.1

VERTICAL CROSS SECTION VIEW OF CYLINDER WITH LINER, without dimensions

OLD TYPE



CURRENT TYPE

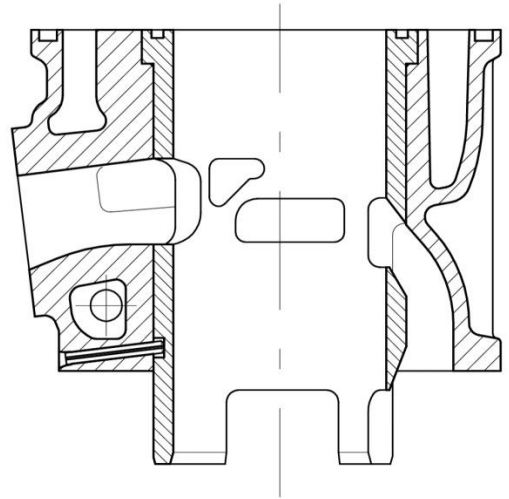


PHOTO OF THE CYLINDER FROM ABOVE

PHOTO OF THE CYLINDER FROM RH SIDE




NEW LOGO





D.2 CONROD, CRANKCASE, CRANKSHAFT & PISTON

EXPLODED DRAWING OF THE PISTON, CRANKSHAFT, CONNECTING ROD AND CRANKCASES UNIT (exploded crankshaft)

NEW LOGO



NEW LOGO

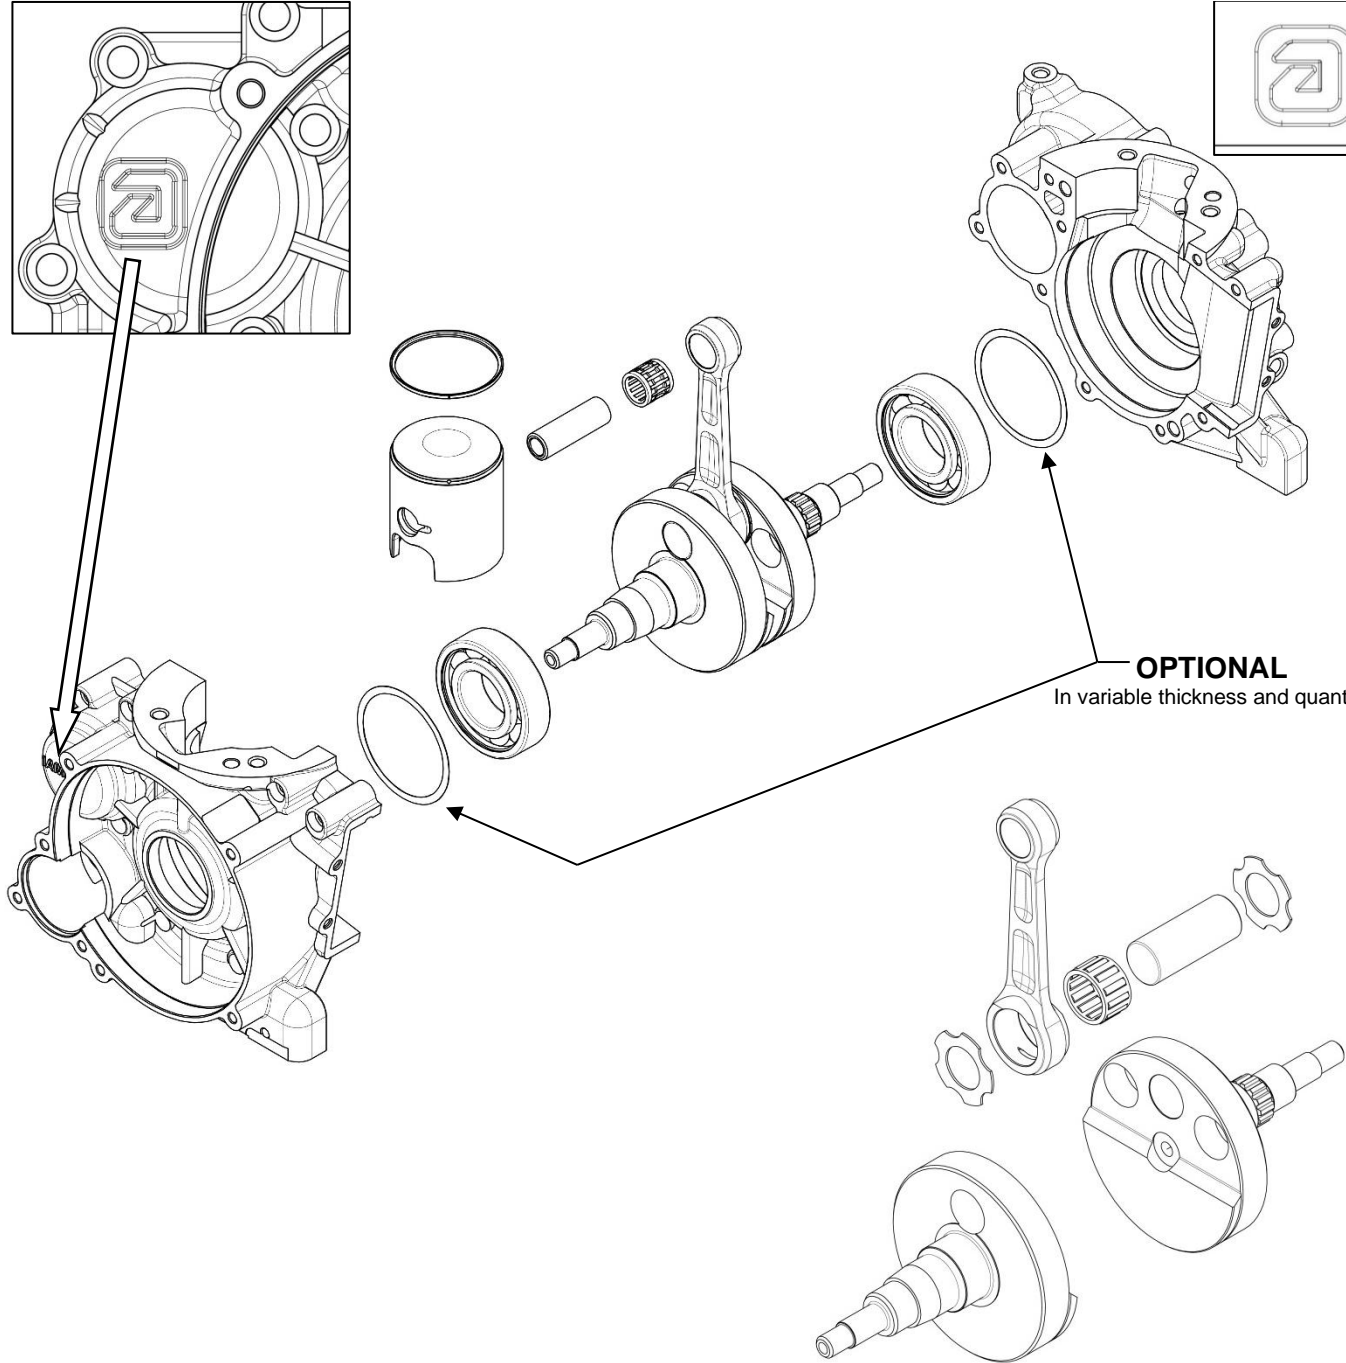

OPTIONAL
 In variable thickness and quantity

Without screws or gaskets. **The aim of the exploded drawings is to identify the principles, the functioning and the whole mechanical unit**

...Section D.2



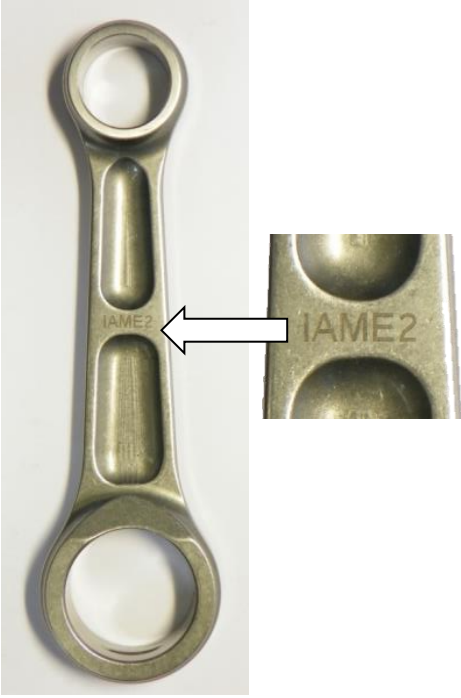
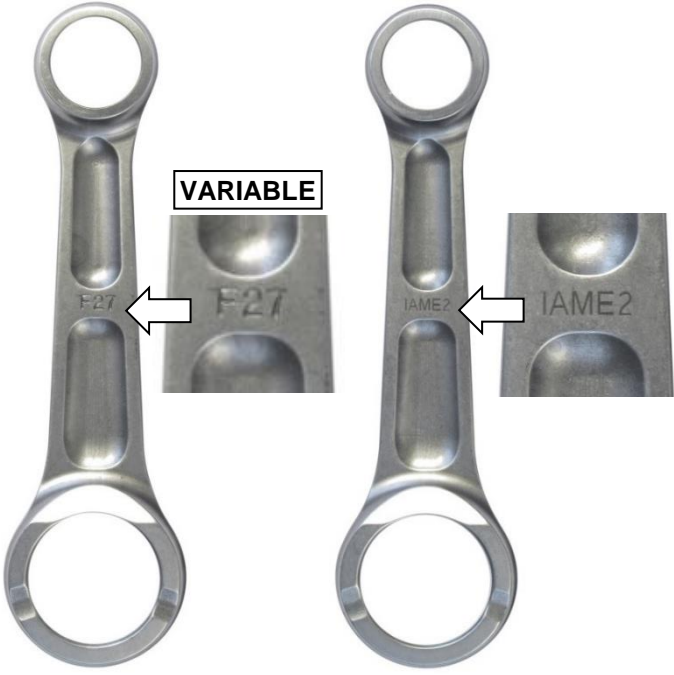
PHOTO OF THE CONROD	PHOTO OF ALTERNATIVE CONROD
	
<p>DRAWING OF THE PISTON (MAIN DIMENSIONS incl. tolerances)</p>	<p>PHOTO OF THE CRANKSHAFT & CONROD</p>
	

PHOTO IDENTIFICATION OF SMALL END CONROD BEARING – TYPES ALTERNATIVE

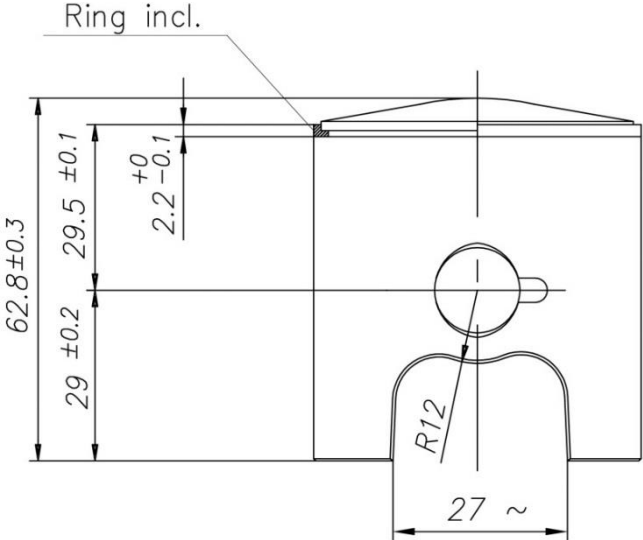TYPE 1



TYPE 2

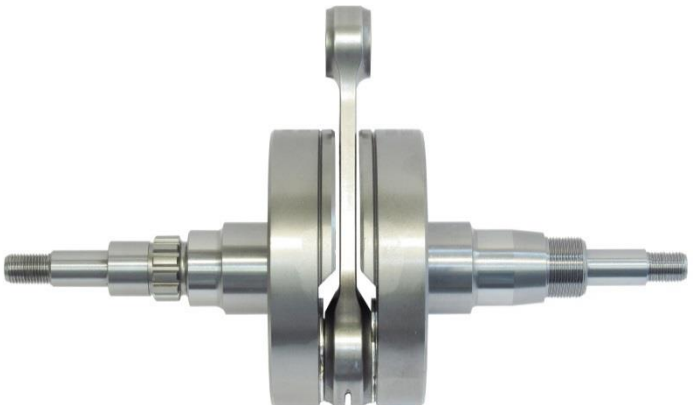

PHOTO IDENTIFICATION OF SILVER CONROD WASHER – TYPES ALTERNATIVE

TYPE 1





TYPE 2




...Section D.2

PHOTO OF THE INSIDE OF THE RH CRANKCASE

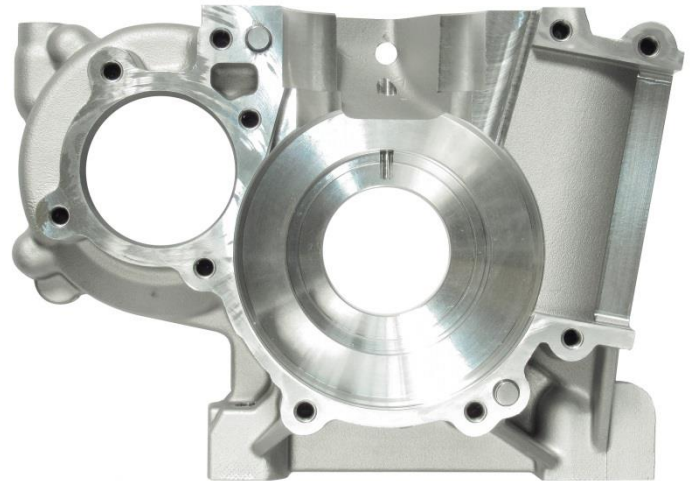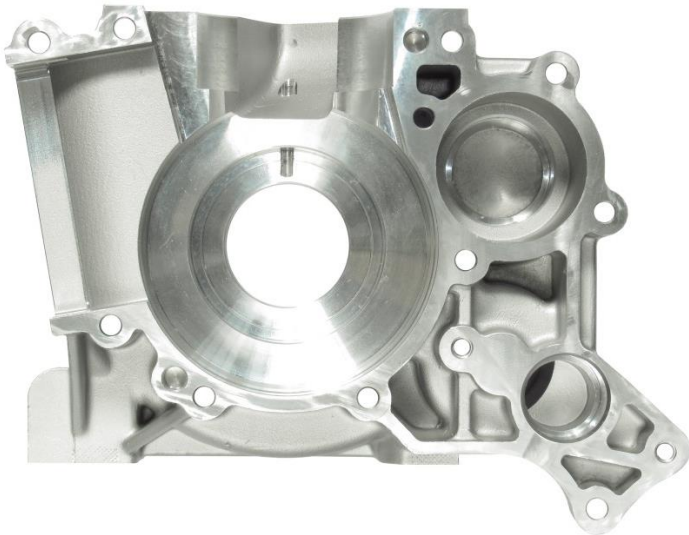
PHOTO OF THE INSIDE OF THE LH CRANKCASE



DRAWING OF THE CRANKSHAFT - CON ROD UNIT (DIMENSIONS incl. tolerances, big & small ends thickness, crank mass thickness & diameter)

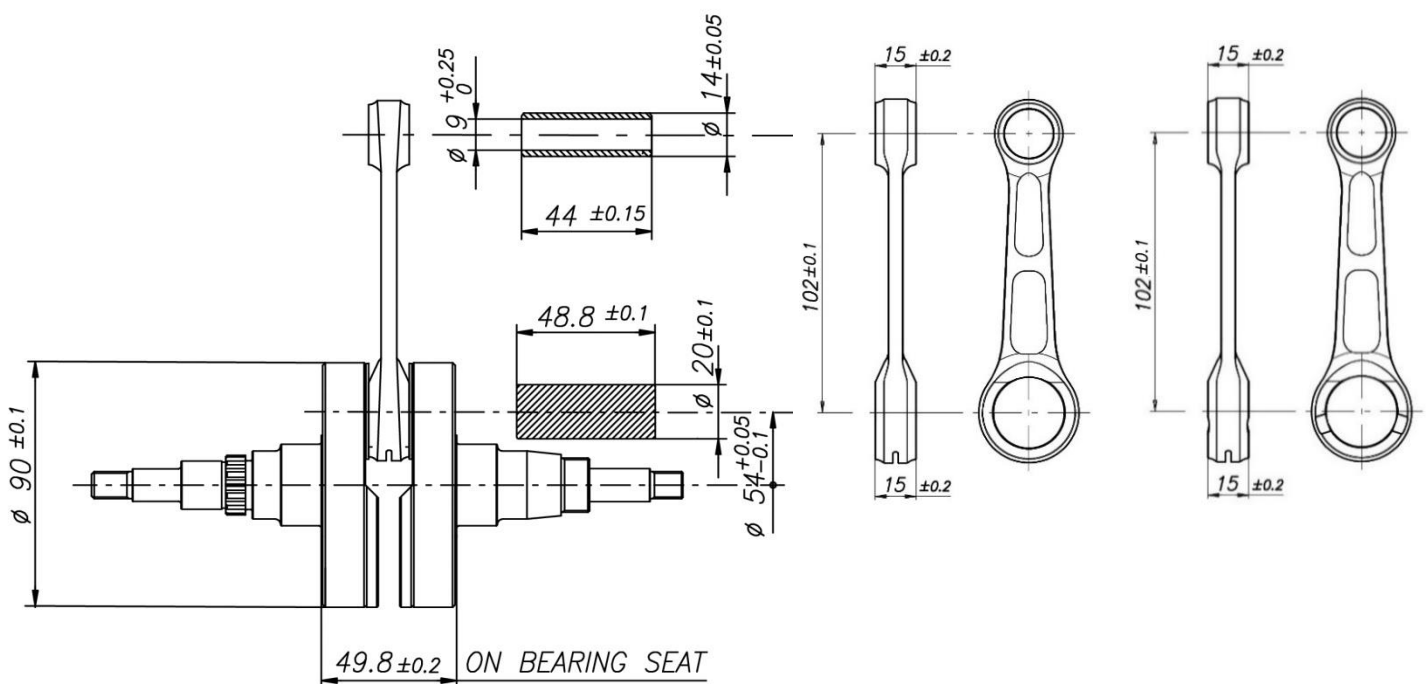

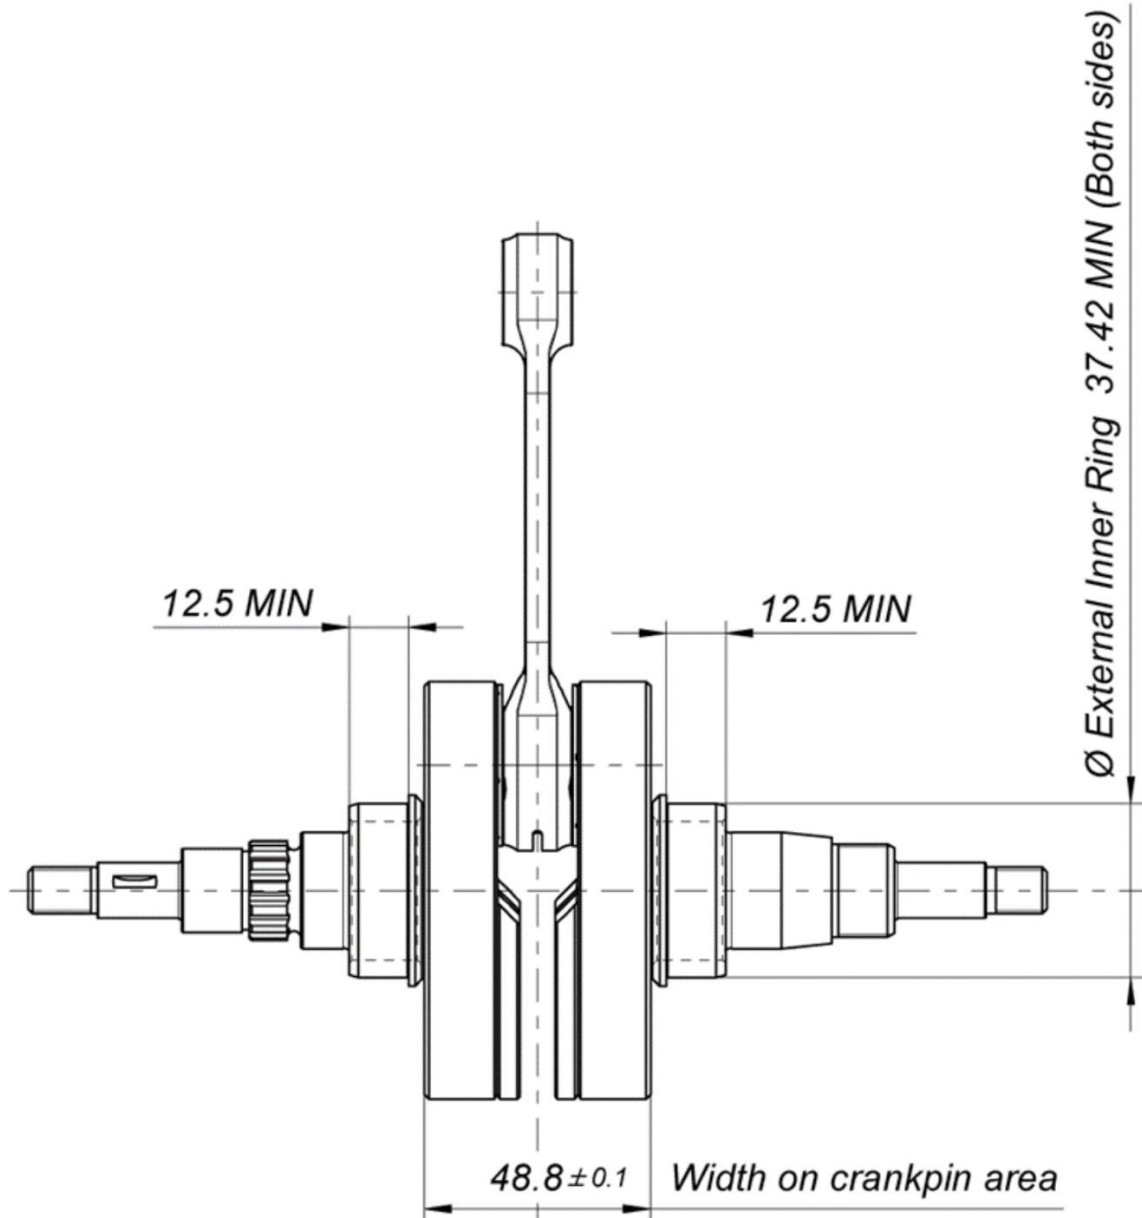
CRANKSHAFT DIMENSIONS WITH ALTERNATIVE ROLLER MAIN BEARINGS



Crankshaft complete as pictured min. Weight 2220 g

D.3 BALANCE SHAFT



EXPLODED DRAWING OF THE BALANCE SHAFT

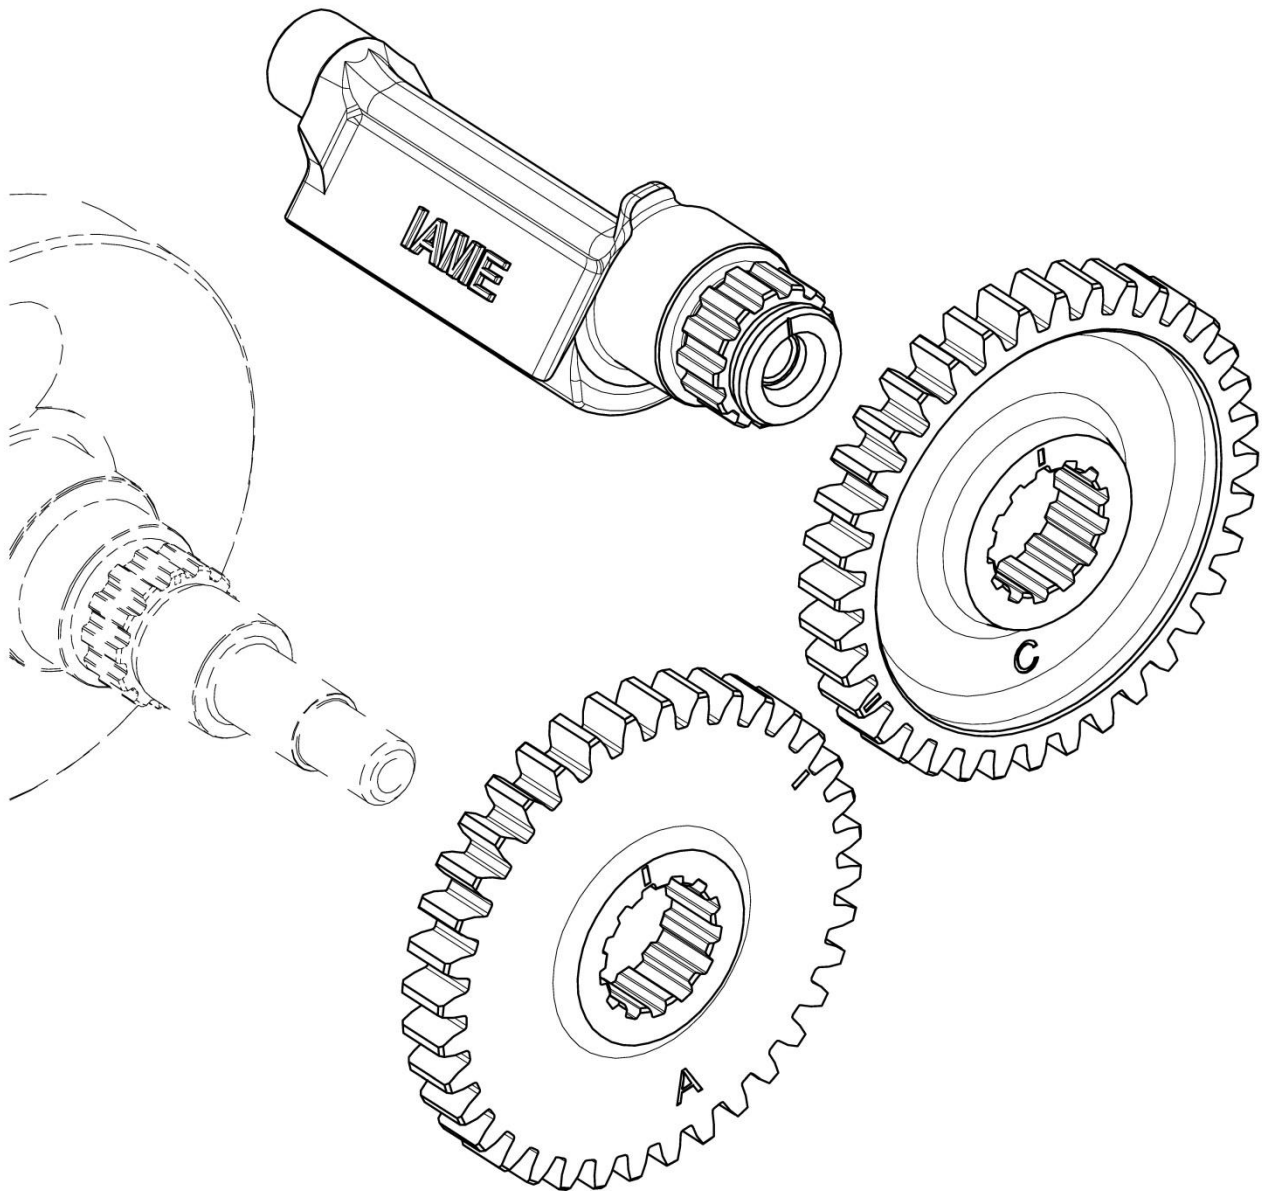


Without screws or gaskets.

The aim of the exploded drawings is to identify the principles, the functioning and the whole mechanical unit

...Section D.3

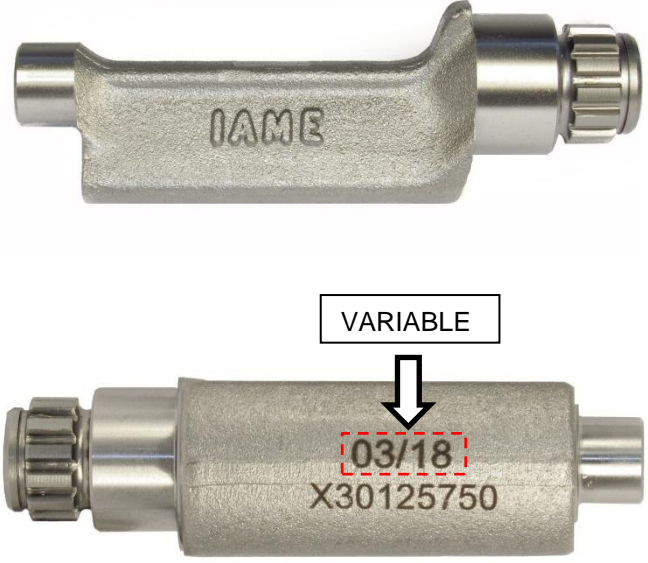
PHOTO OF THE BALANCE SHAFT	PHOTO IDENTIFICATION OF ALTERNATIVE ROLLER BEARING
	<p>Alternative bearing to 6206 type Part No: BC1-3342 B</p> 

*DRAWING OF THE BALANCE SHAFT
 (DIMENSIONS incl. tolerances)*

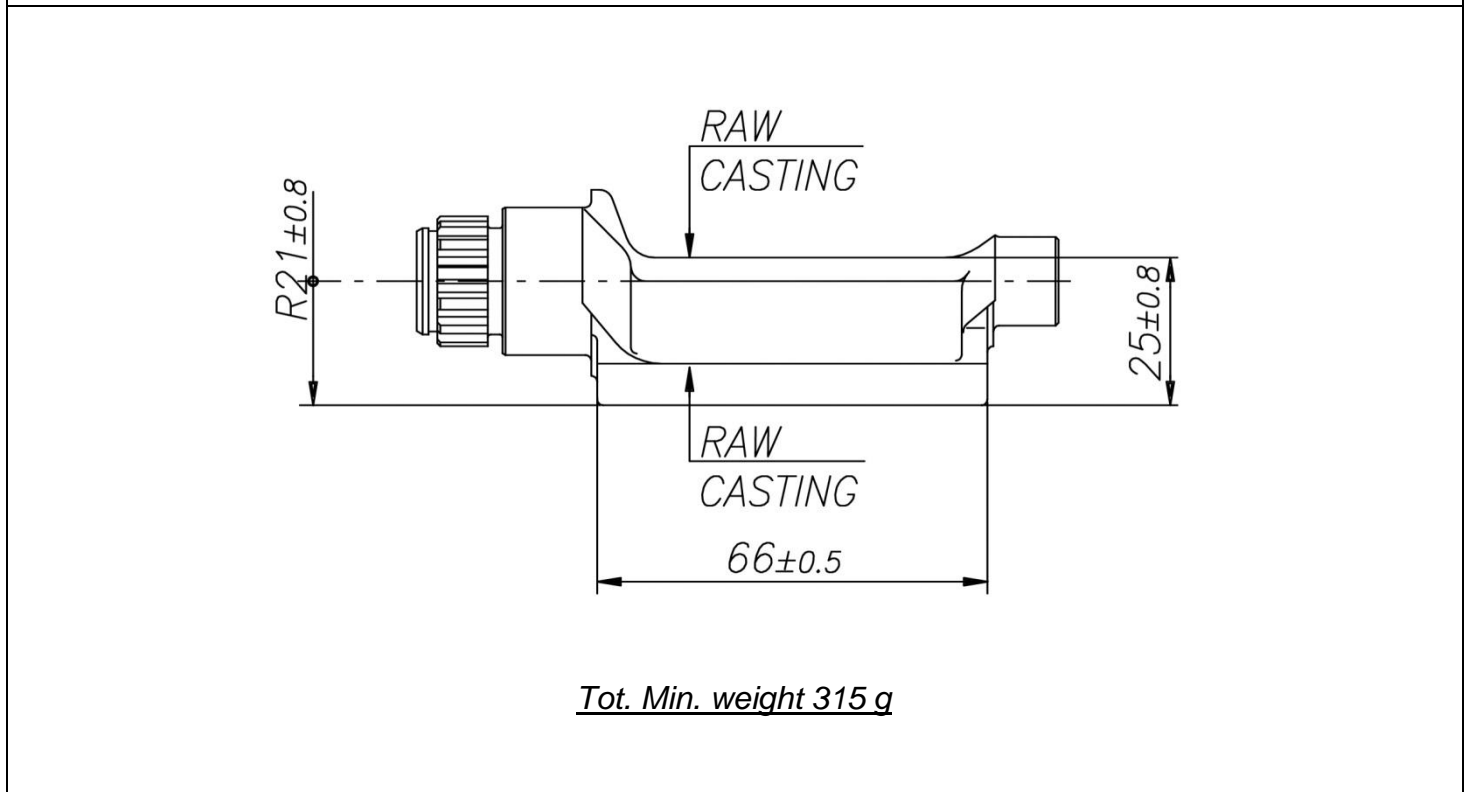


D.4 REED VALVE & CLUTCH


TECHNICAL DRAWING (exploded view) OF THE CLUTCH ASSEMBLY

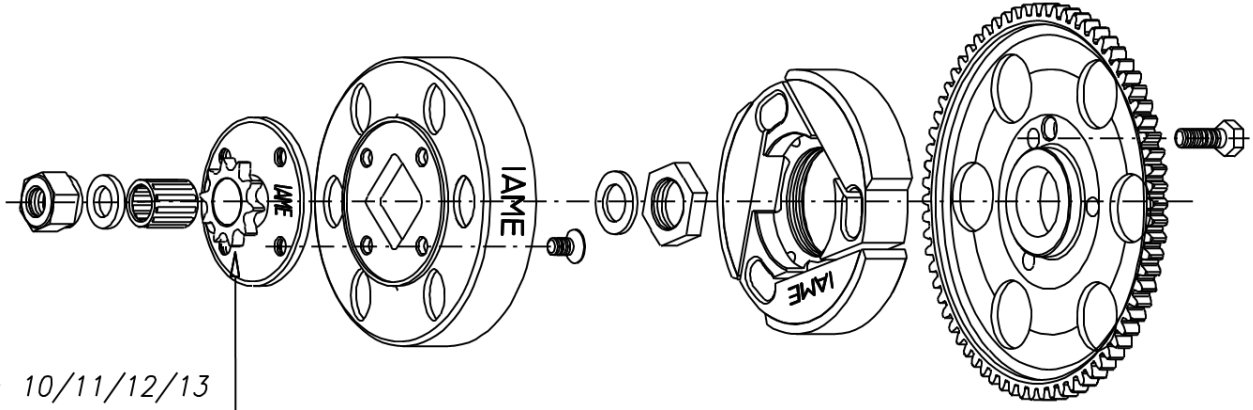

TECHNICAL DRAWING (exploded view) OF THE CLUTCH ASSEMBLY – ALTERNATIVE

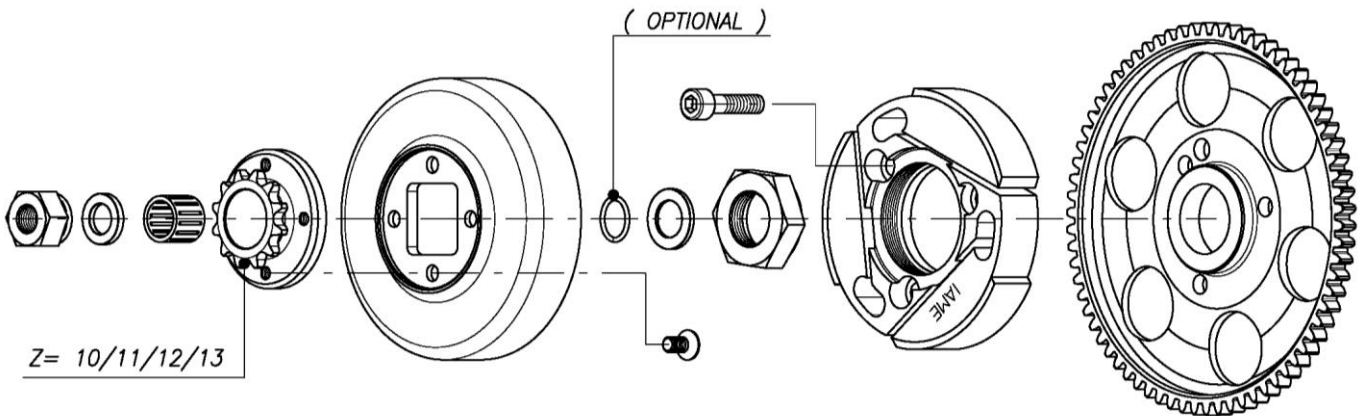


TECHNICAL DRAWING (exploded view) OF THE REED VALVE

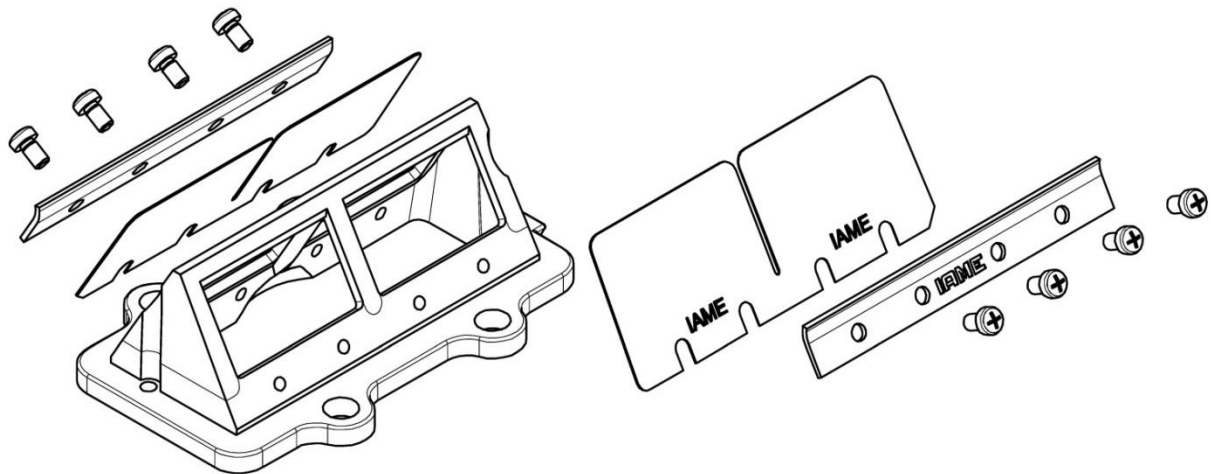


The aim of the exploded drawings is to identify the principles, the functioning and the whole mechanical unit

... Section D.4

**DRAWING OF THE REED VALVE
 (DIMENSIONS incl. tolerances)**

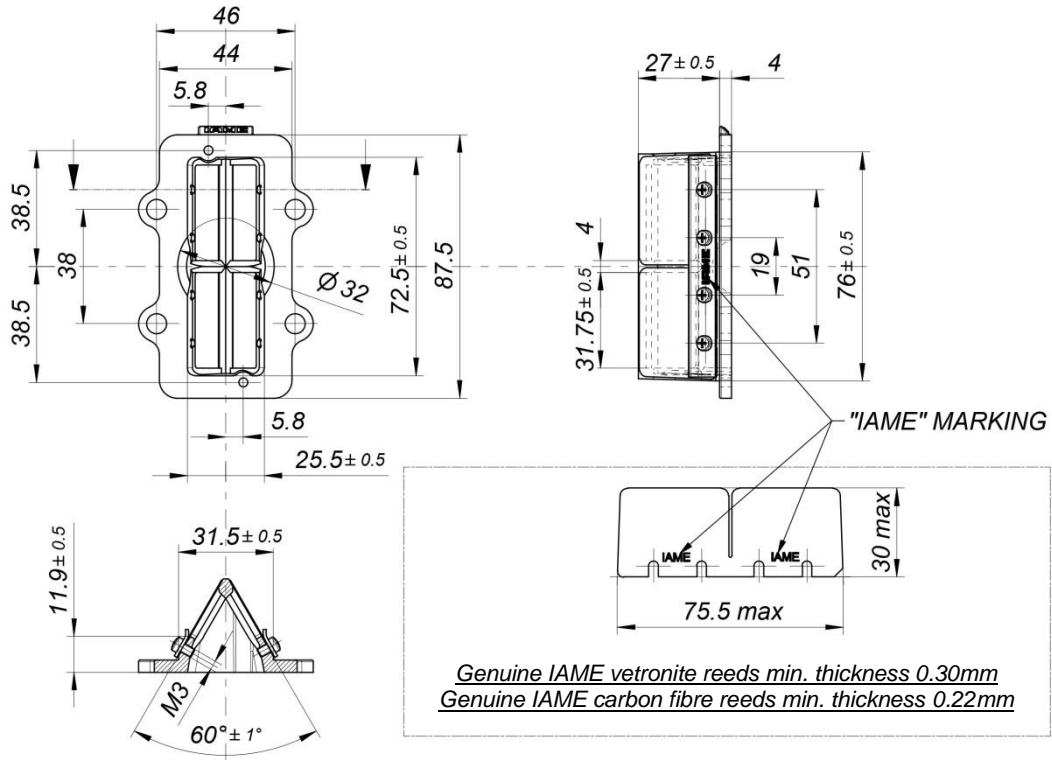


DRAWING OF THE INLET CONVEYOR

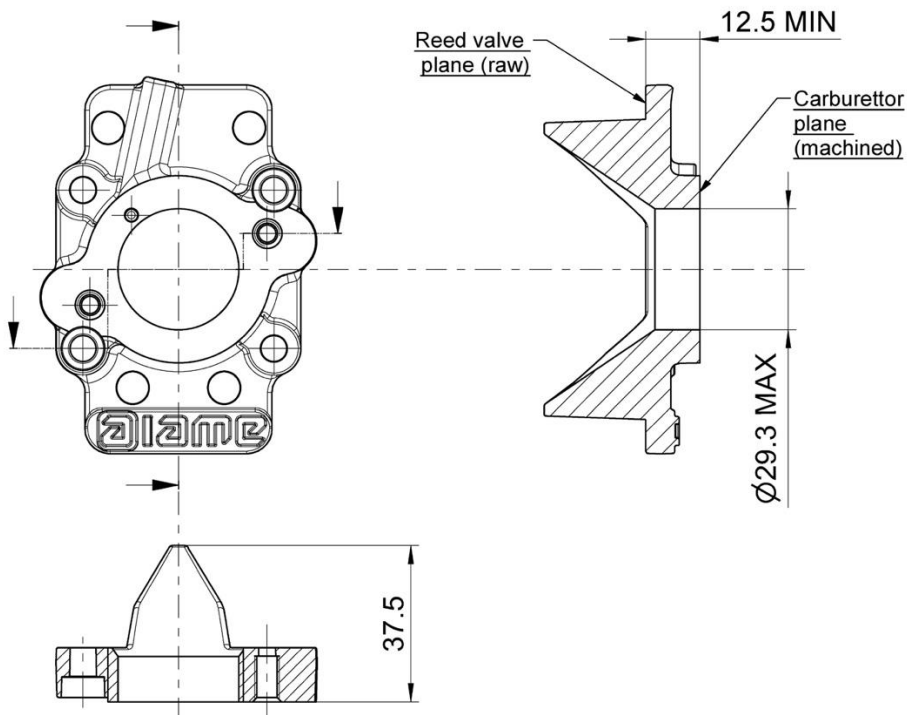


GENERAL TOLERANCES	
Dimensions	Machined parts
< 25 mm	±0.5
25÷60	±0.8
> 60 mm	±1.5

... Section D.4

DRAWING OF AIR BOX

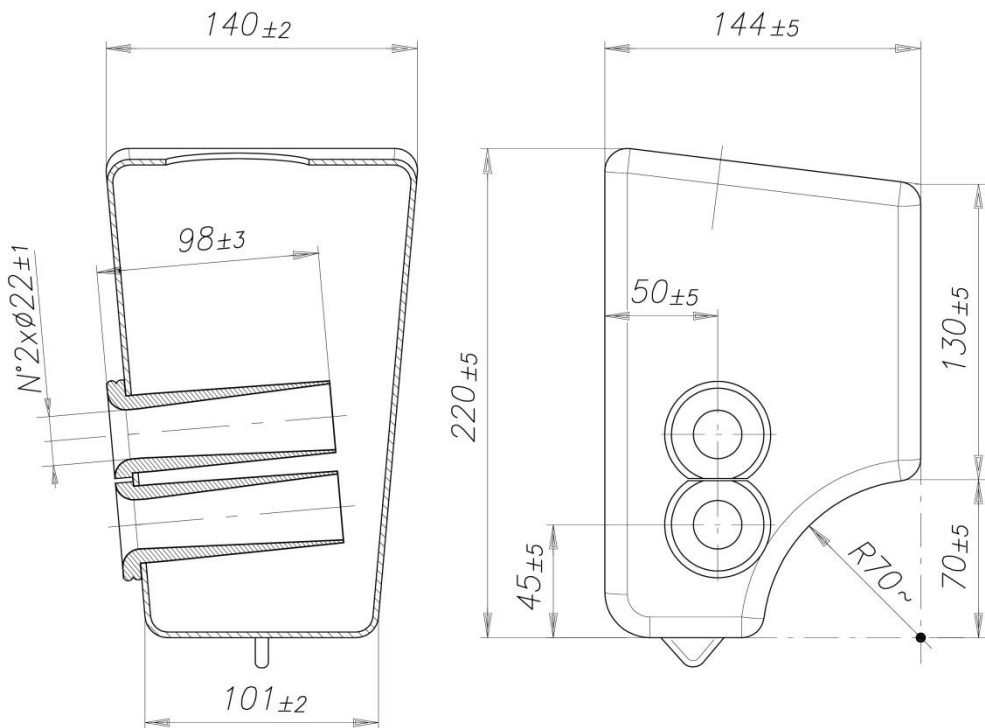

EXPLODED VIEW OF AIR BOX

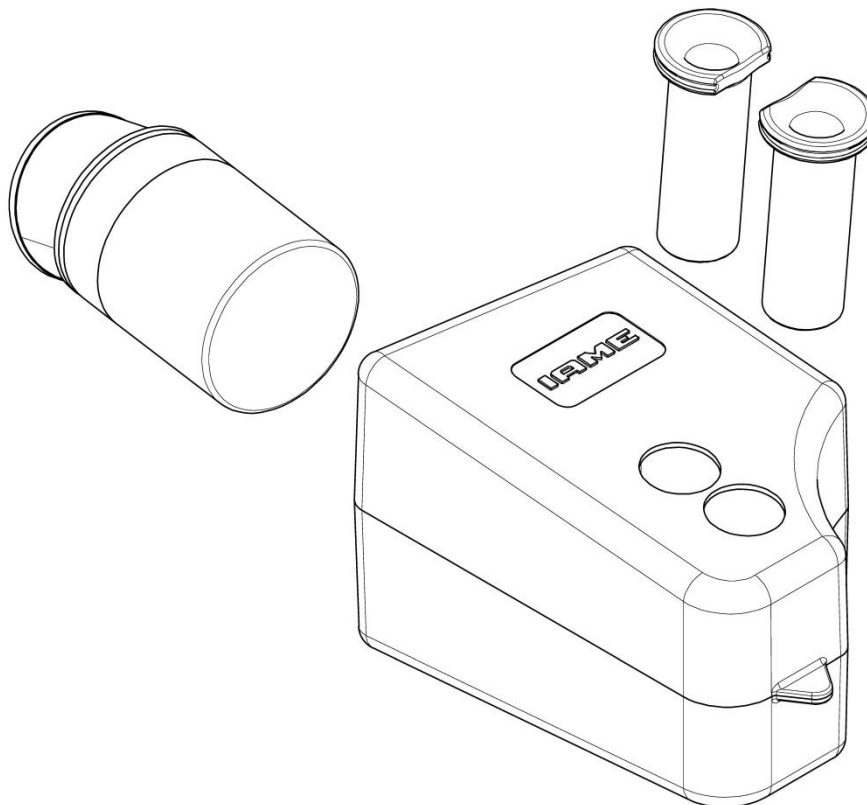

INLET SILENCER TUBES NEW TYPE

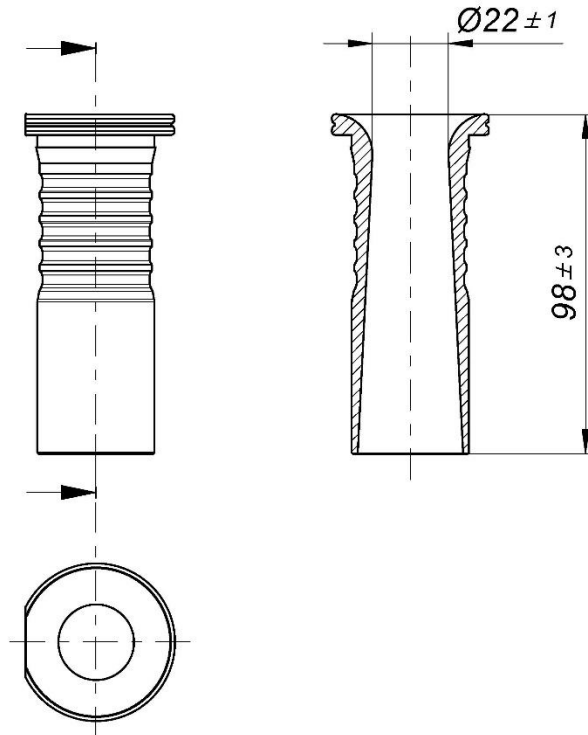


PHOTO IDENTIFICATION OF PERMISSIBLE INLET SILENCER TUBES



RAIN COVER INLET SILENCER – DRAWING


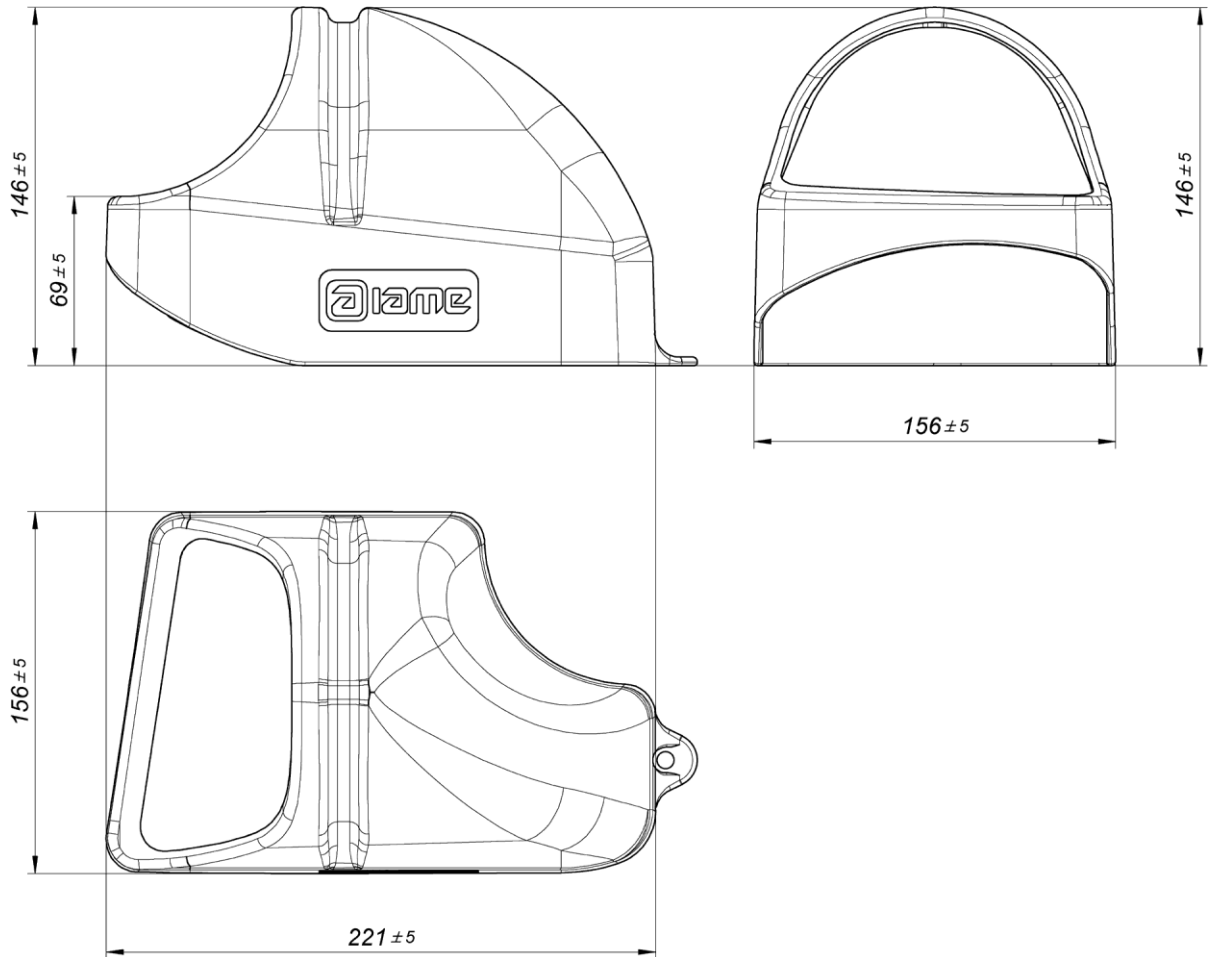


PHOTO IDENTIFICATION OF RAIN COVER INLET SILENCER

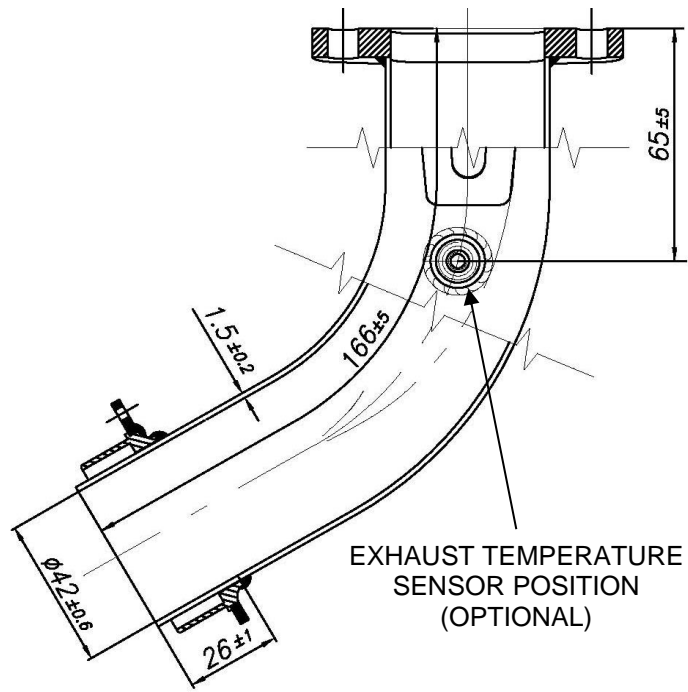


D.5 EXHAUST SYSTEM

TYPE 1 - EXHAUST HEADER DRAWING




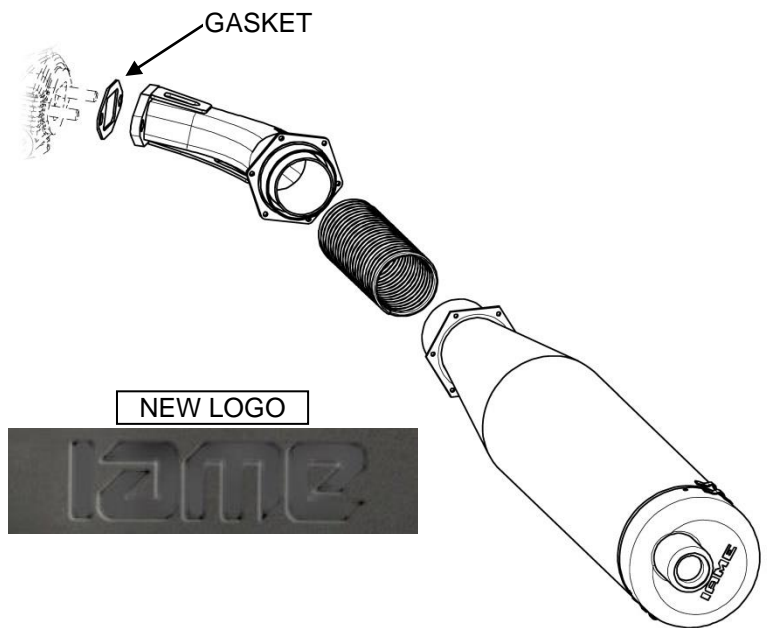TYPE 1 - EXHAUST HEADER ASSEMBLY AND MARKING




D.5 EXHAUST SYSTEM

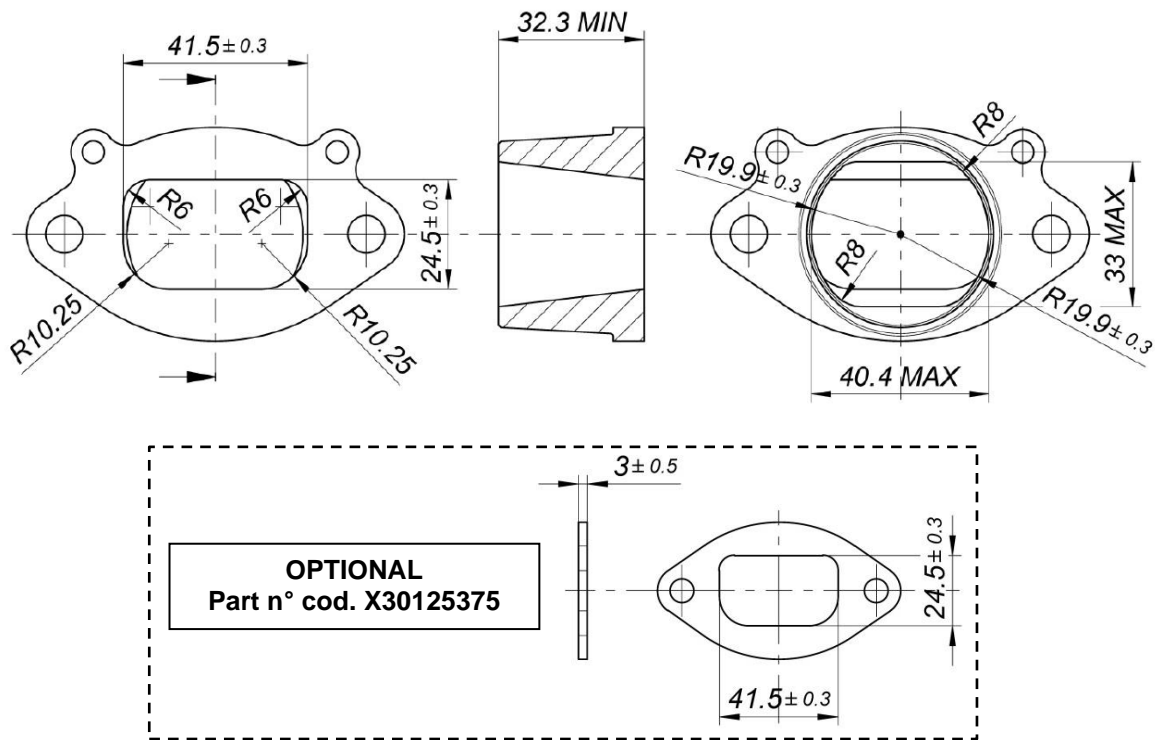TYPE 2 - EXHAUST MANIFOLD DRAWING



TYPE 2 - EXHAUST MANIFOLD ASSEMBLY AND MARKING

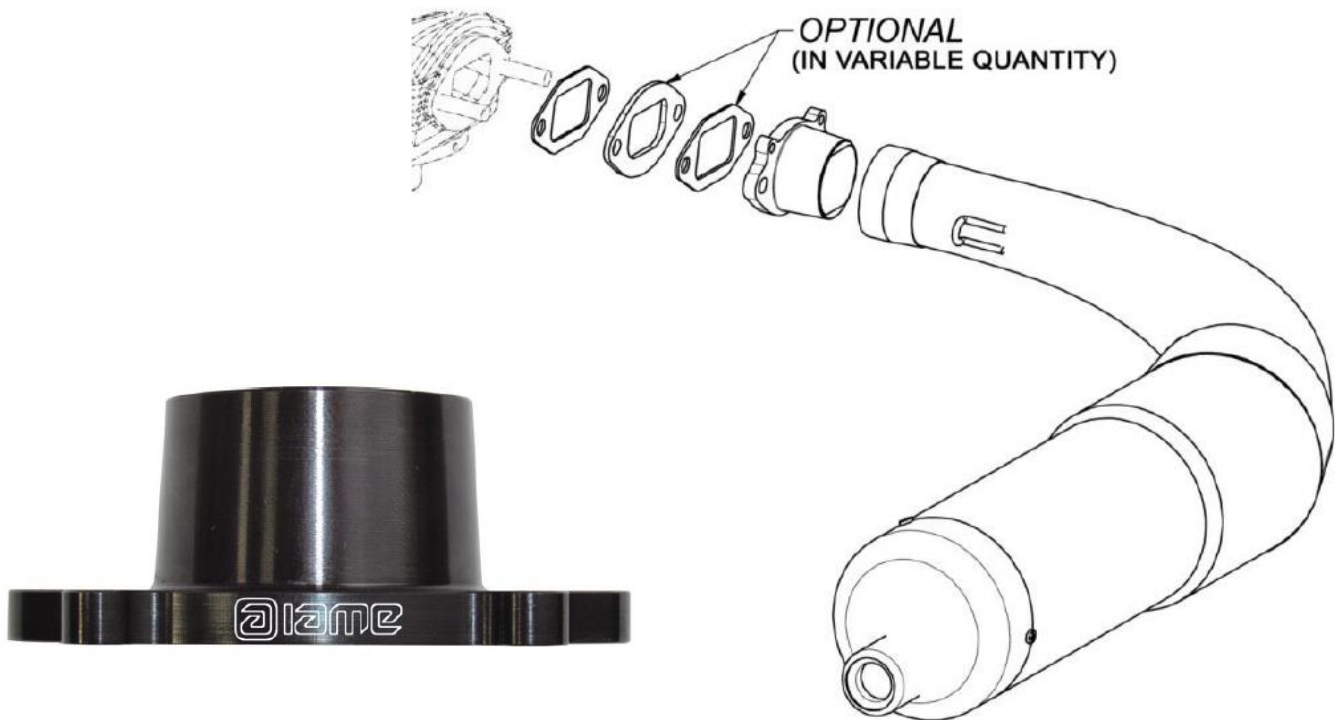


D.5 EXHAUST SYSTEM


TYPE 2 - EXHAUST MANIFOLD WITH RESTRICTOR - D22

SUPERSEDED *NLA*
 FOR REFERENCE
 PURPOSE ONLY

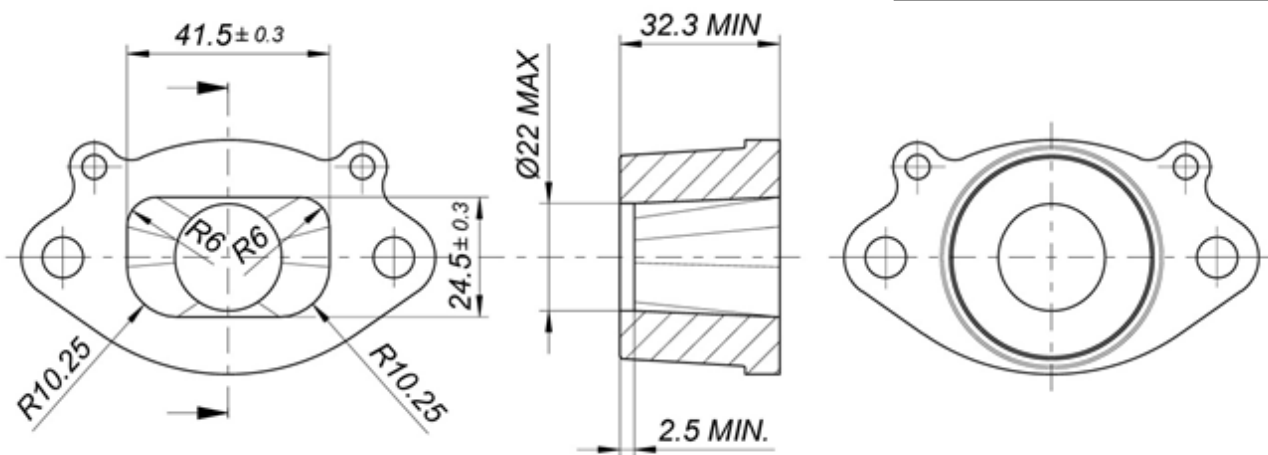For use in:
 - **Restricted 125**
 - **Junior Performance**
 - **X30 Junior**



TYPE 2 - EXHAUST MANIFOLD WITH RESTRICTOR D22 - ASSEMBLY & MARKING

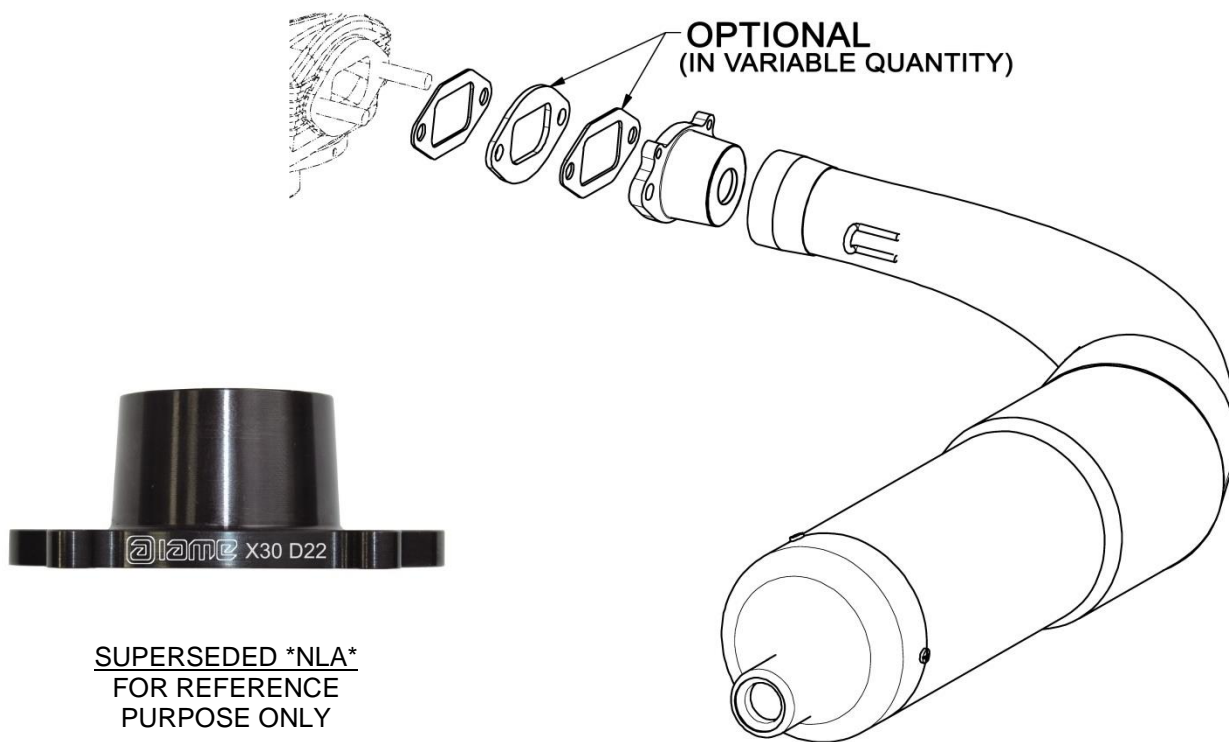


SUPERSEDED *NLA*
 FOR REFERENCE
 PURPOSE ONLY


D.5 EXHAUST SYSTEM

ALTERNATIVE - TYPE 2 - EXHAUST MANIFOLD WITH RESTRICTOR – D22.7

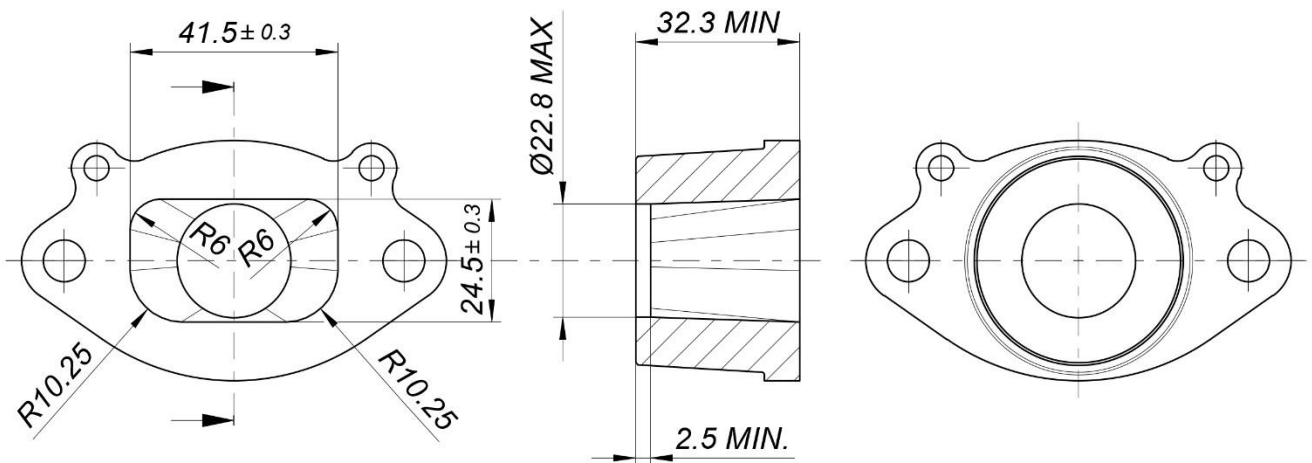For use in:
 - **Restricted 125**
 - **Junior Performance**
 - **X30 Junior**



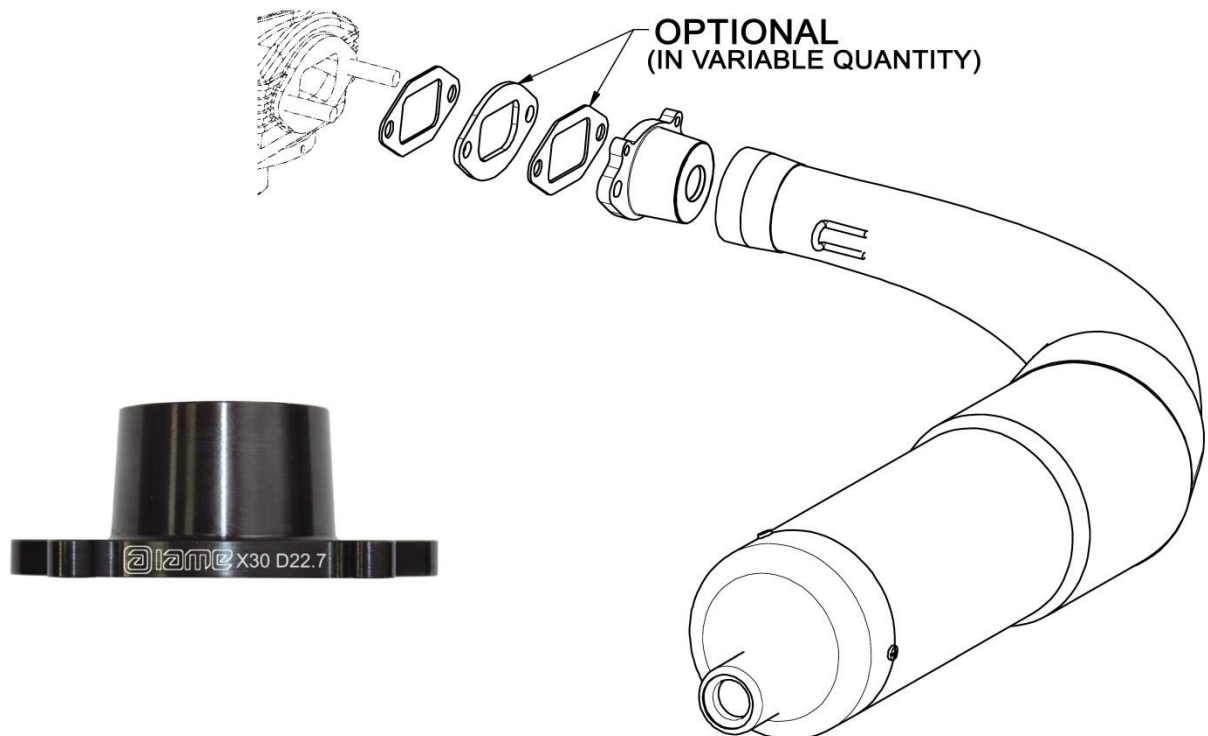ALTERNATIVE TYPE 2 - EXHAUST MANIFOLD WITH RESTRICTOR D22.7 ASSY AND MARKING



D.5 EXHAUST SYSTEM

PHOTO OF THE EXHAUST – TYPE 1


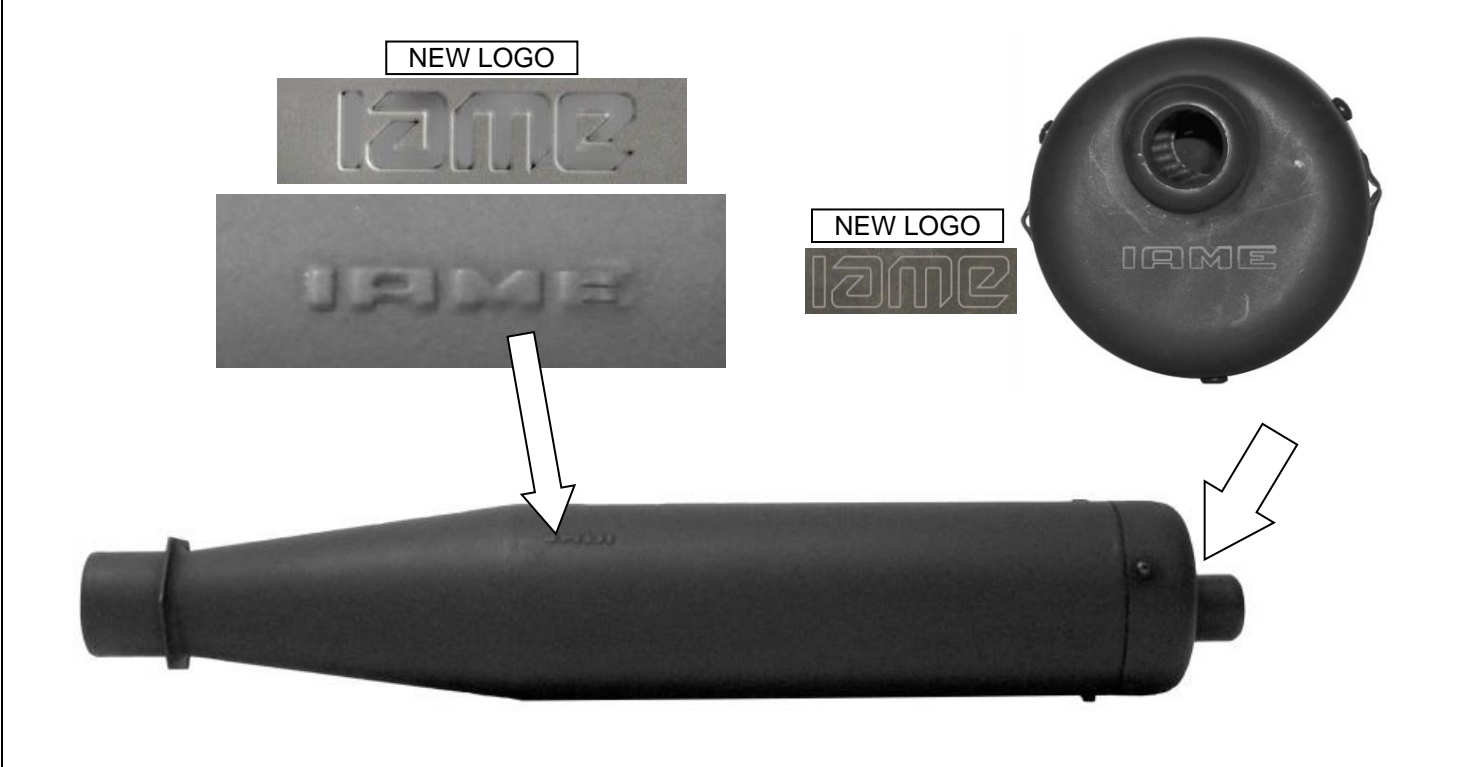


PHOTO OF THE EXHAUST – TYPE 2

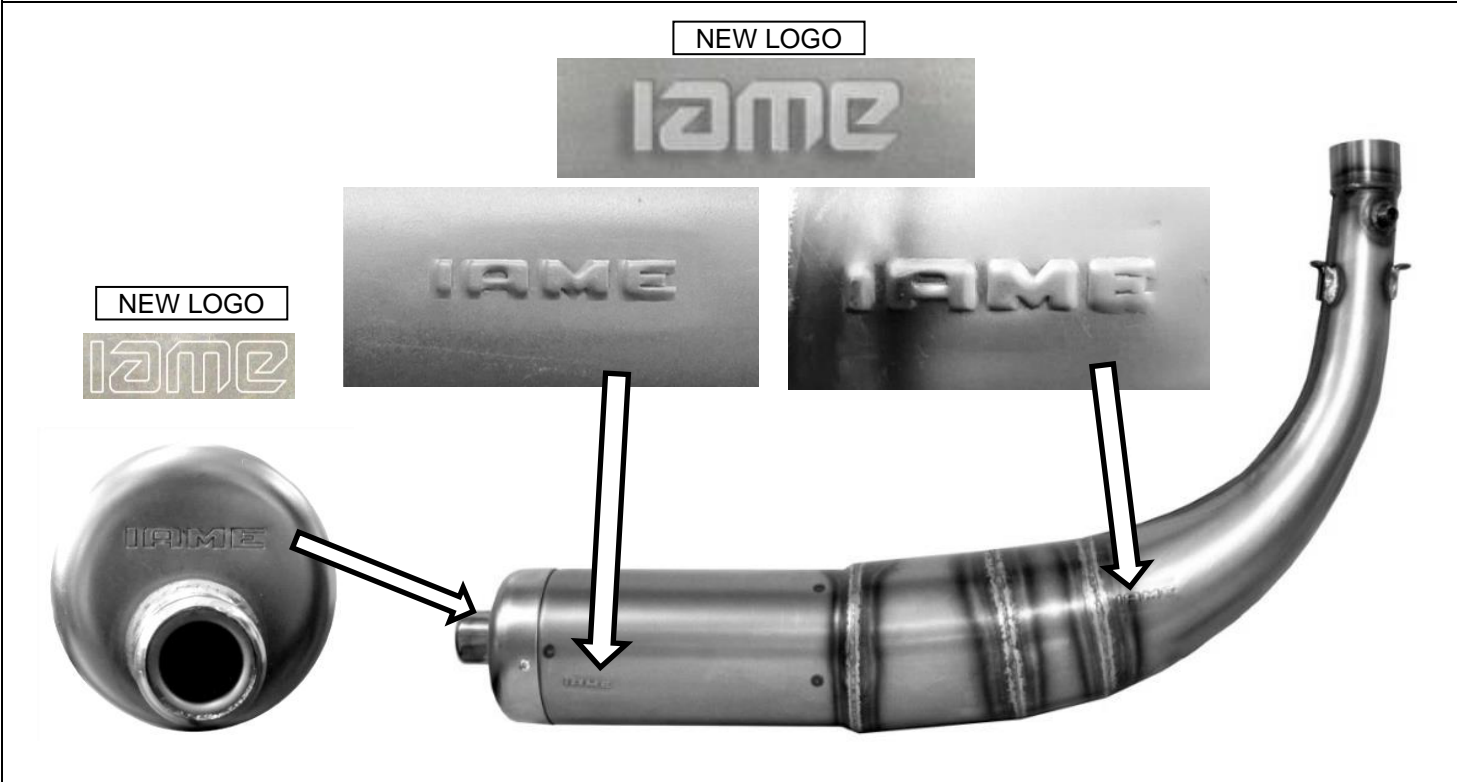

... Section D.5


TECHNICAL DESCRIPTIONS OF THE EXHAUST (Art. 8.9.3 of HR) – TYPE 1

Weight in g	1390	Minimum
Volume in cc	3330	+/-5 %

TECHNICAL DRAWING – TYPE 1

It must include all the information necessary to build this exhaust

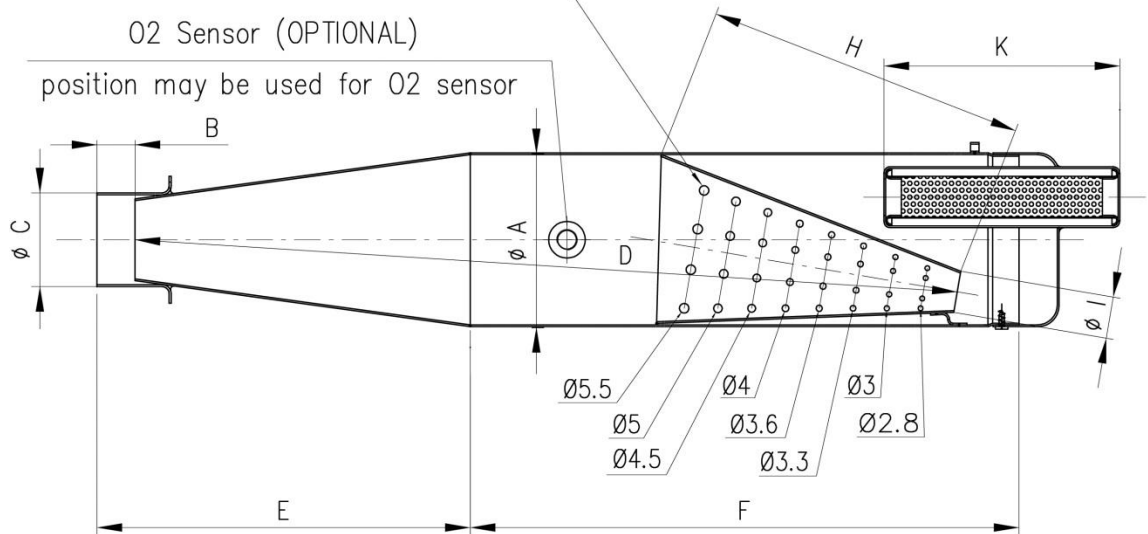N° 8 ROWS OF HOLES. THE ROWS ARE COMPOSED OF N°8 HOLES, FOR A TOT OF 64 HOLES. THE HOLES HAVE A TOLLERANCE OF ±0.2



A: $100 \pm 1 \phi_{ext.}$	D: 485 ± 5	H: 180 ± 5
B: 22 ± 1	E: 218 ± 5	I: $24 \pm 2 \phi_{ext.}$
C: $54 \pm 1 \phi_{ext.}$	F: 315 ± 3	K: 130 ± 3


... Section D.5

TECHNICAL DESCRIPTIONS OF THE EXHAUST (Art. 8.9.3 of HR) – TYPE 2

Weight in g	1780	Minimum
Volume in cc	4250	+/-5 %

TECHNICAL DRAWING – TYPE 2

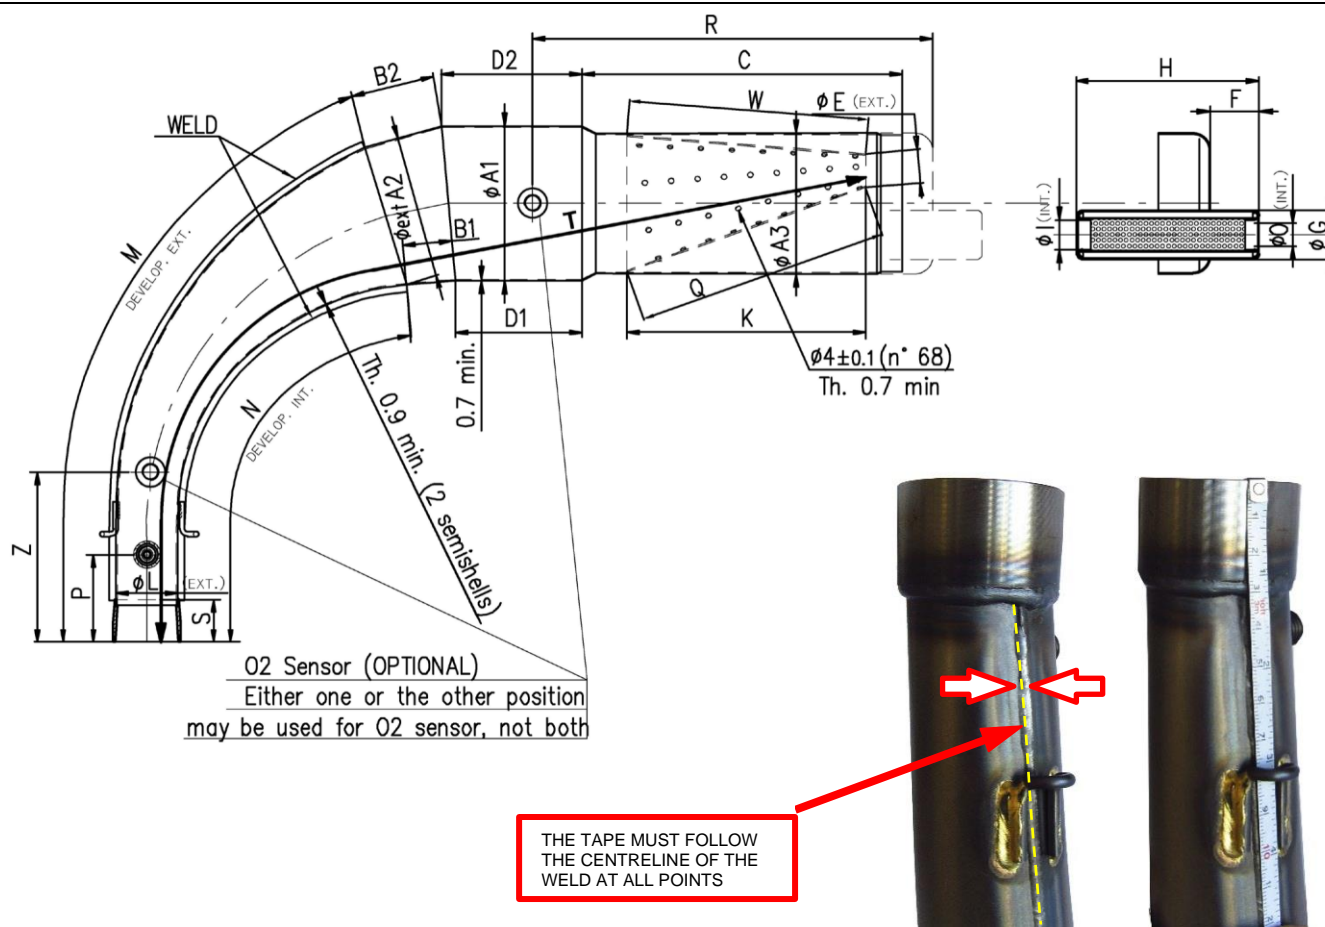It must include all the information necessary to build this exhaust



ØA1: 110 ±1.5 Øext	C: 219 ±3	ØG: 35 ±1 Øext.	M: 439 ±3	T: 690 ±3
ØA2: 102 ±1.5 Øext.	D1: 90 ±3	H: 132 ±3	N: 341 ±3	W: 170 ±3
ØA3: 100 ±1.5 Øext.	D2: 109 ±3	ØI: 21 ±1 Øint.	ØO: 21 ±1 Øint.	Q: 182 ±3
B1: 60 ±3	ØE: 23.5 ±2 Øext.	K: 170 ±3	P: 50 ±10	Z: 120 ±10
B2: 60 ±3	F: 36 ±2	ØL: 42.5 ±1.5 Øext.	S: 29 ±1.5	R: 270 ±10


The dimensions "M", "N" and "T" must be taken by steel tape measure 6mm wide.

The dimensions "M" and "N" must be taken on the weld centerline.

The dimensions "Q" and "W" must be taken by steel tape measure 12mm wide.

D.6 STARTER

EXPLODED DRAWING OF THE STARTING UNIT AND OF ITS HOUSING

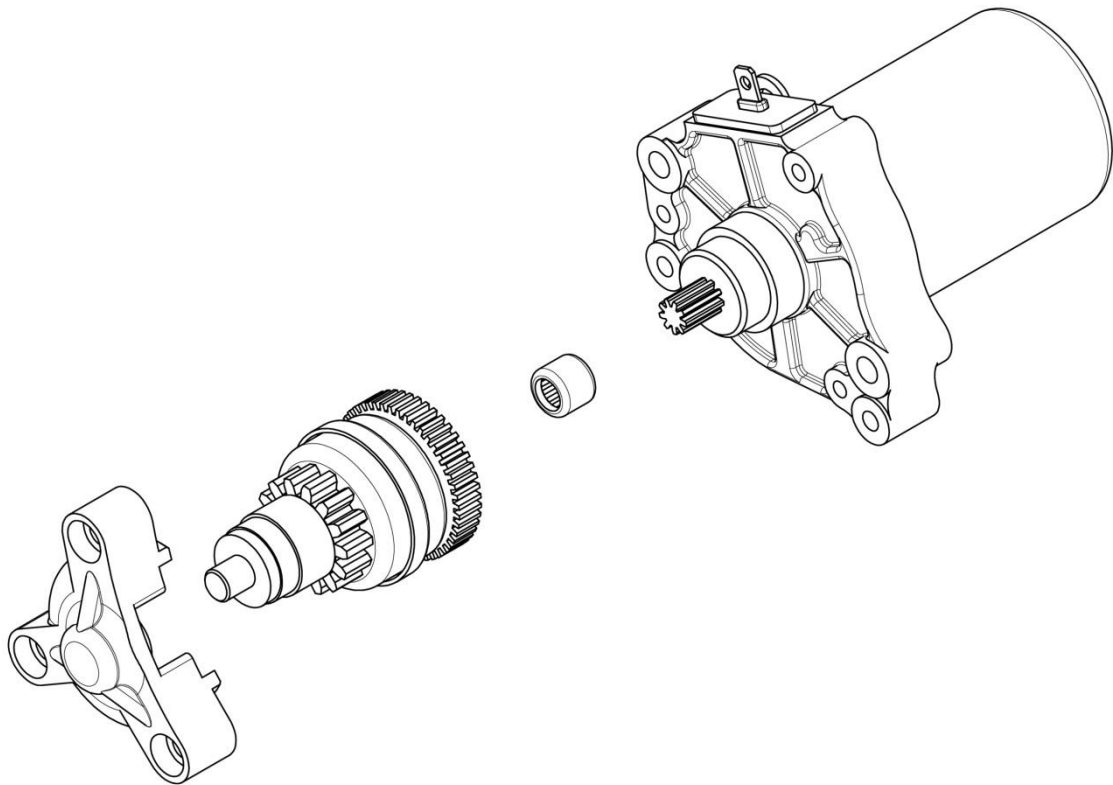


Without screws or gaskets.

The aim of the exploded drawings is to identify the principles, the functioning and the whole mechanical unit

D.8 ELECTRICAL SYSTEM

IGNITION SYSTEM – TYPE 1

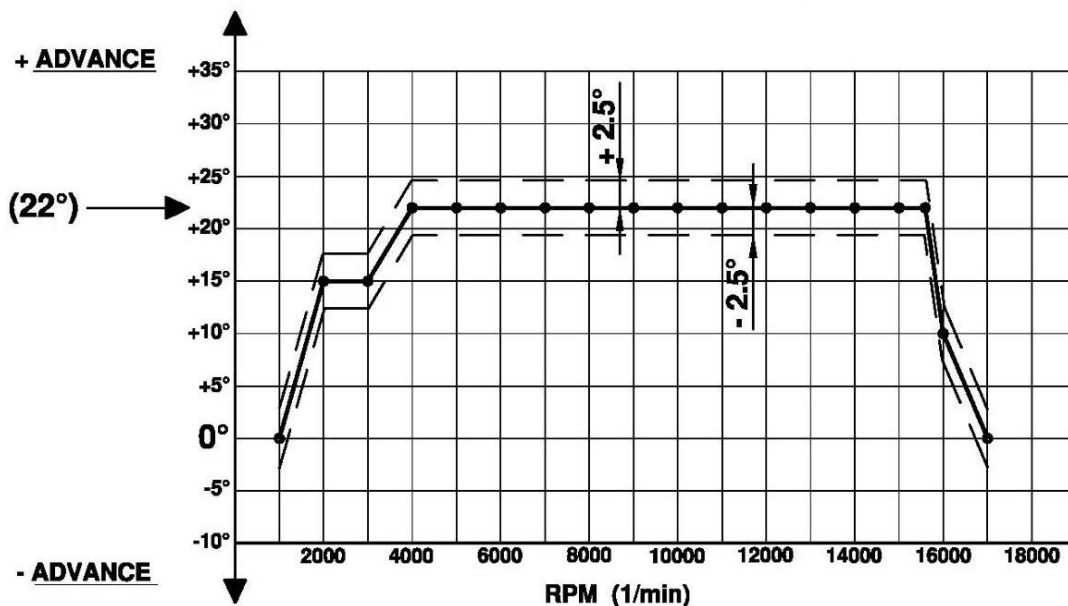ADVANCE CURVE GRAPHS – SELETTRA DIGITAL « K »



Ignition homologation No.	-
Ignition homologation No.	-
Ignition homologation No.	-
Ignition homologation No.	-
Code	SELETTRA (Rotor+Stator) : X30125950 Black
Code	SELETTRA (H.T. Coil) : X30125955 Black
Code	SELETTRA (ECU – AKA 20L) : X30125932 Green
Tr / min	1000 2000 3000 4000 5000 6000 7000 8000 9000 10000 11000 12000 13000 14000 15500 16000 17000
°adv	0° 15° 15° 22° 22° 22° 22° 22° 22° 22° 22° 22° 22° 22° 22° 10° 0°

ELECTRONIC BOX MARKING "AKA 20L"

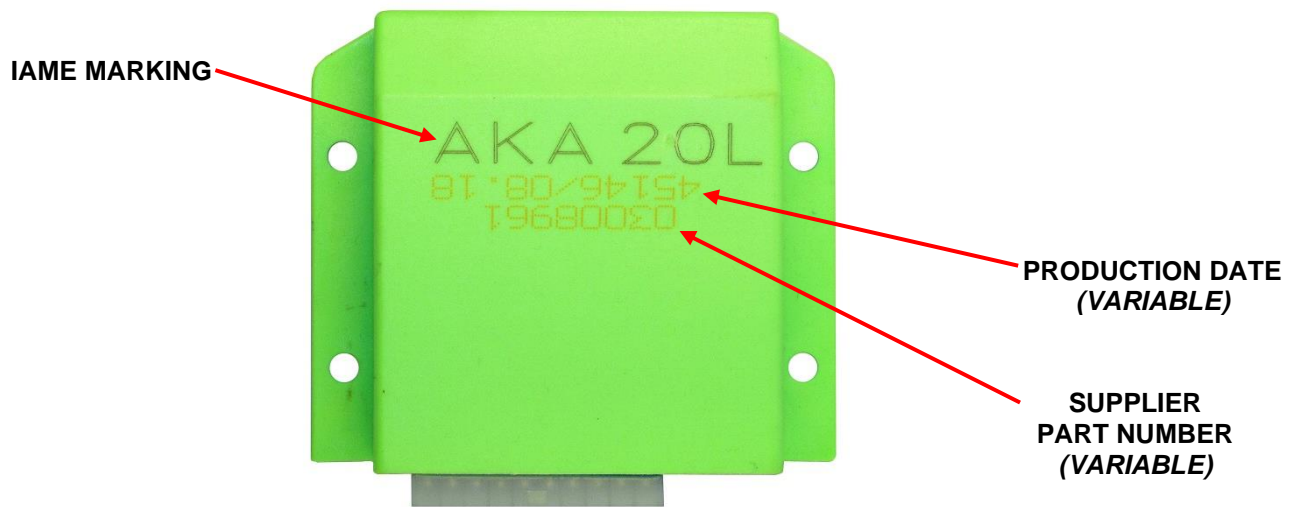


PHOTO OF SELETTRA DIGITAL "K" IGNITION WITH "IAME" MARKING


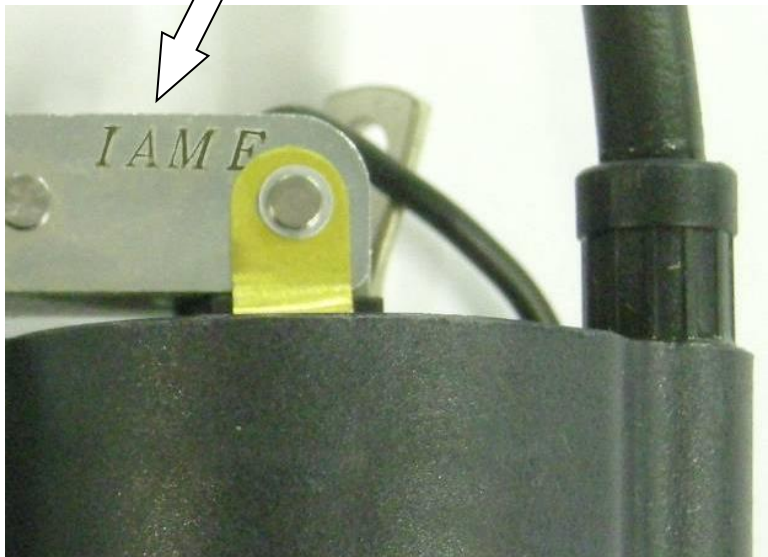
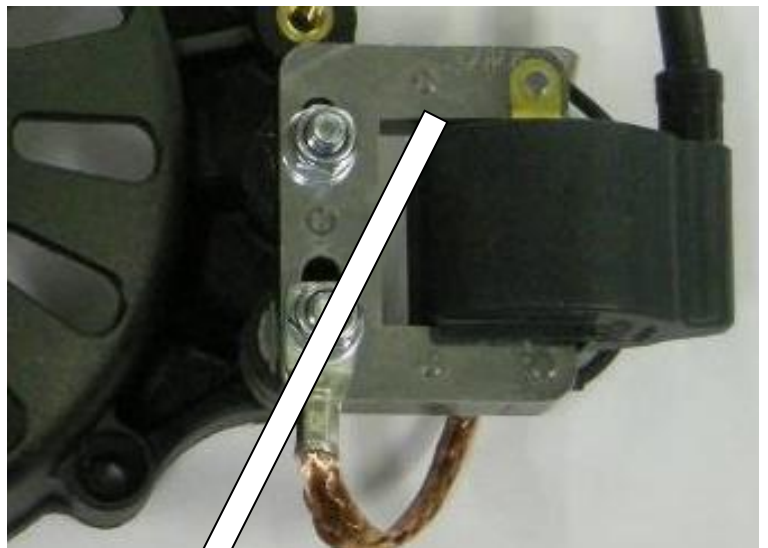
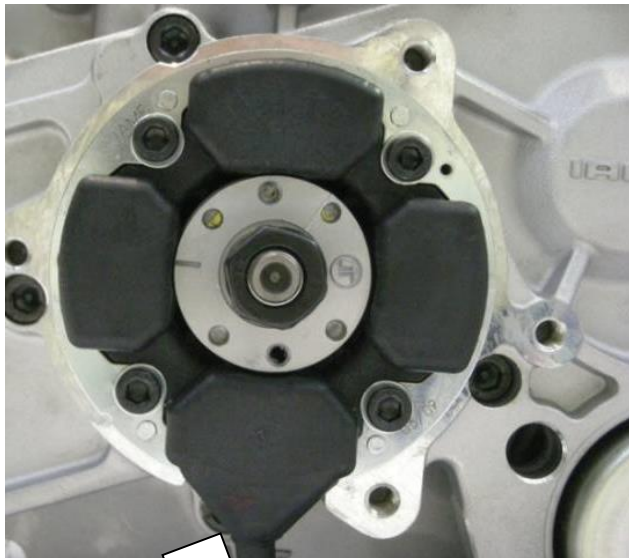


PHOTO COMPLETE WIRING LOOM

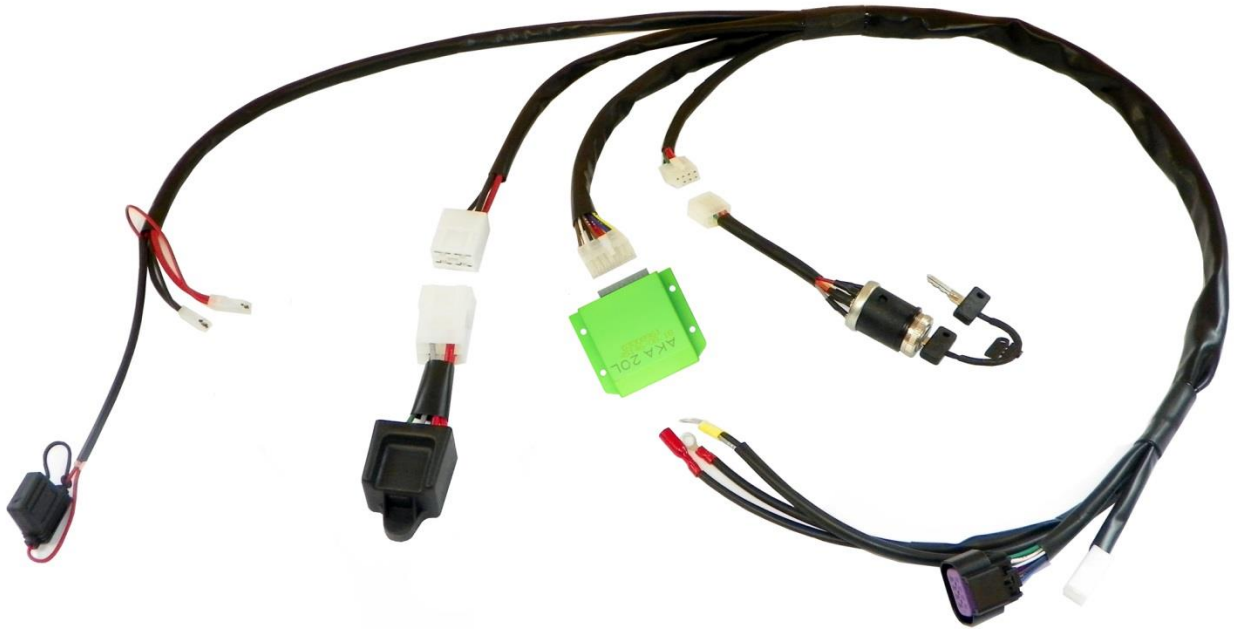

ALTERNATIVE STARTER KEY

It is permitted to use either the “Original Starter Switch (Key) or the “Alternative Starter Switch” detailed herein.

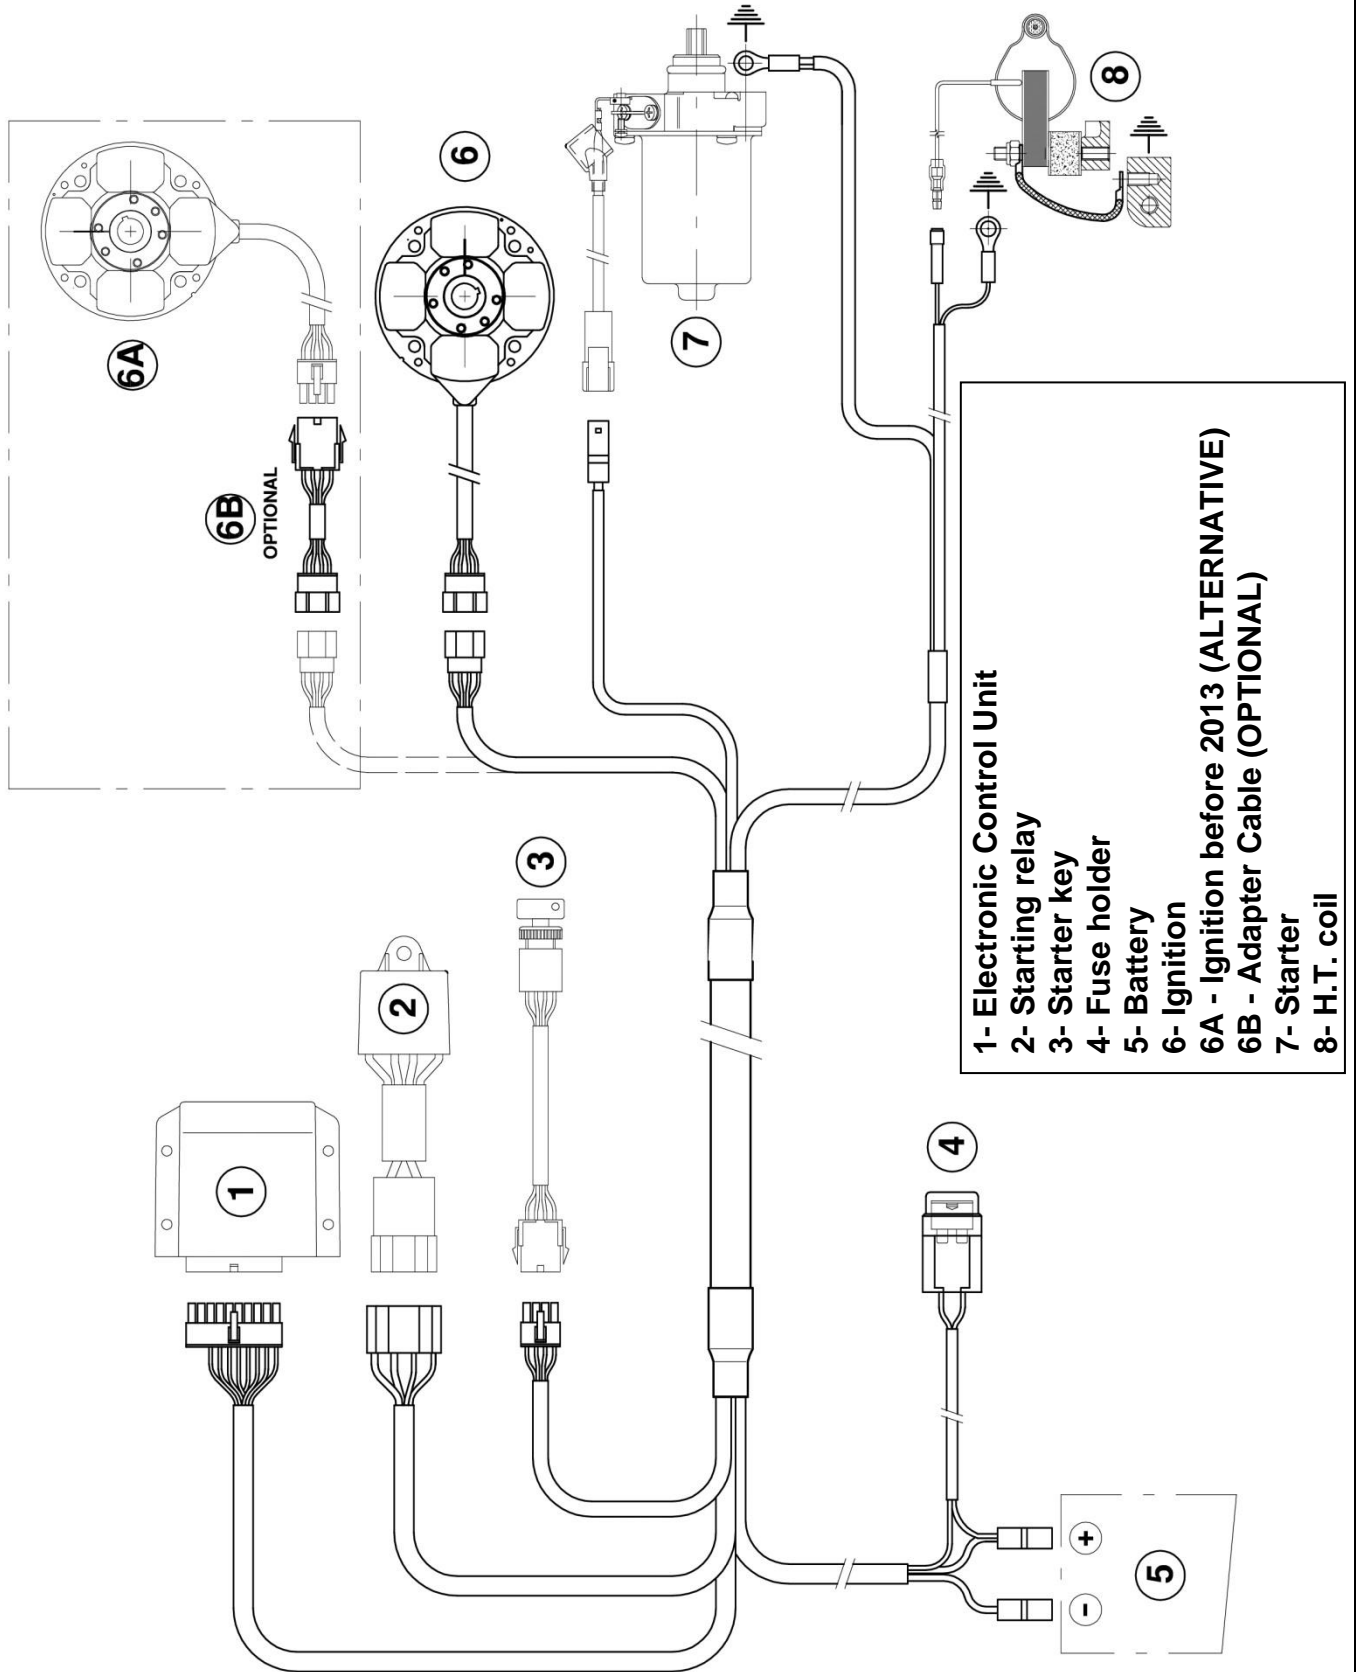
ORIGINAL STARTER KEY



ALTERNATIVE STARTER KEY



WIRING DIAGRAM - SELETTA DIGITAL "K" IGNITION




- 1- Electronic Control Unit
- 2- Starter relay
- 3- Starter key
- 4- Fuse holder
- 5- Battery
- 6- Ignition
- 6A - Ignition before 2013 (ALTERNATIVE)
- 6B - Adapter Cable (OPTIONAL)
- 7- Starter
- 8- H.T. coil

ELECTRICAL SYSTEM

ALTERNATIVE IGNITION SYSTEM – TYPE 2

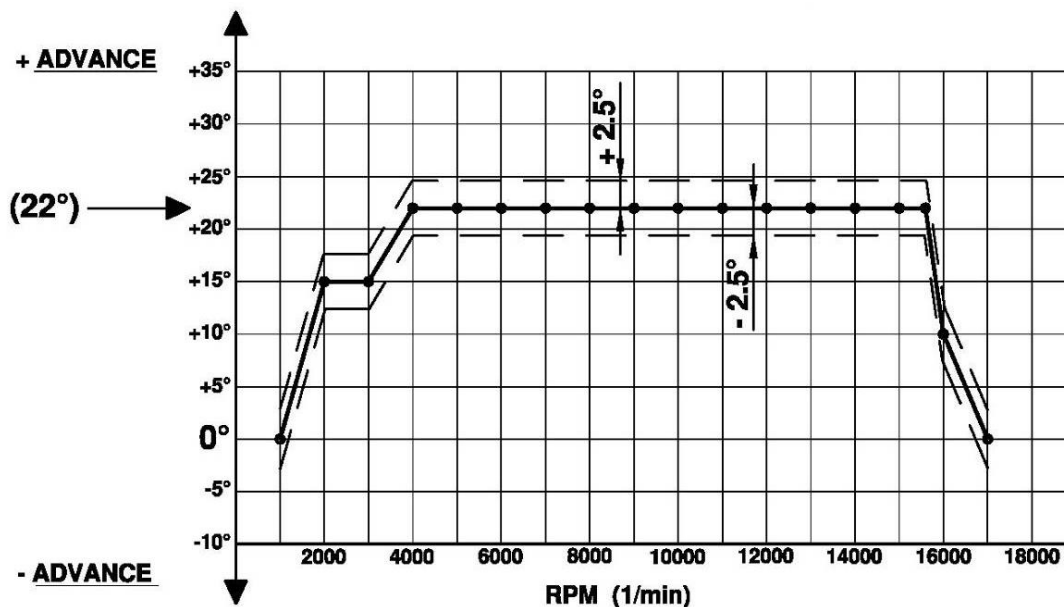ADVANCE CURVE GRAPHS – PVL DIGITAL « 690 »



Ignition homologation No. -

Ignition homologation No. -

Ignition homologation No. -

Ignition homologation No. -

Code

**PVL (Stator+Rotor) : 690 600
 (684 810 + 690 900)**

Black

Code

**PVL (H.T. Coil with ECU) : 690 100 –
 AKA 20L**

Blue

Tr / min	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000	12000	13000	14000	15500	16000	17000
°adv	0°	15°	15°	22°	22°	22°	22°	22°	22°	22°	22°	22°	22°	22°	22°	10°	0°


PHOTO COMPLETE ALTERNATIVE WIRING LOOM



PHOTO OF ALTERNATIVE DIGITAL IGNITION PVL 690, WITH IAME MARKING



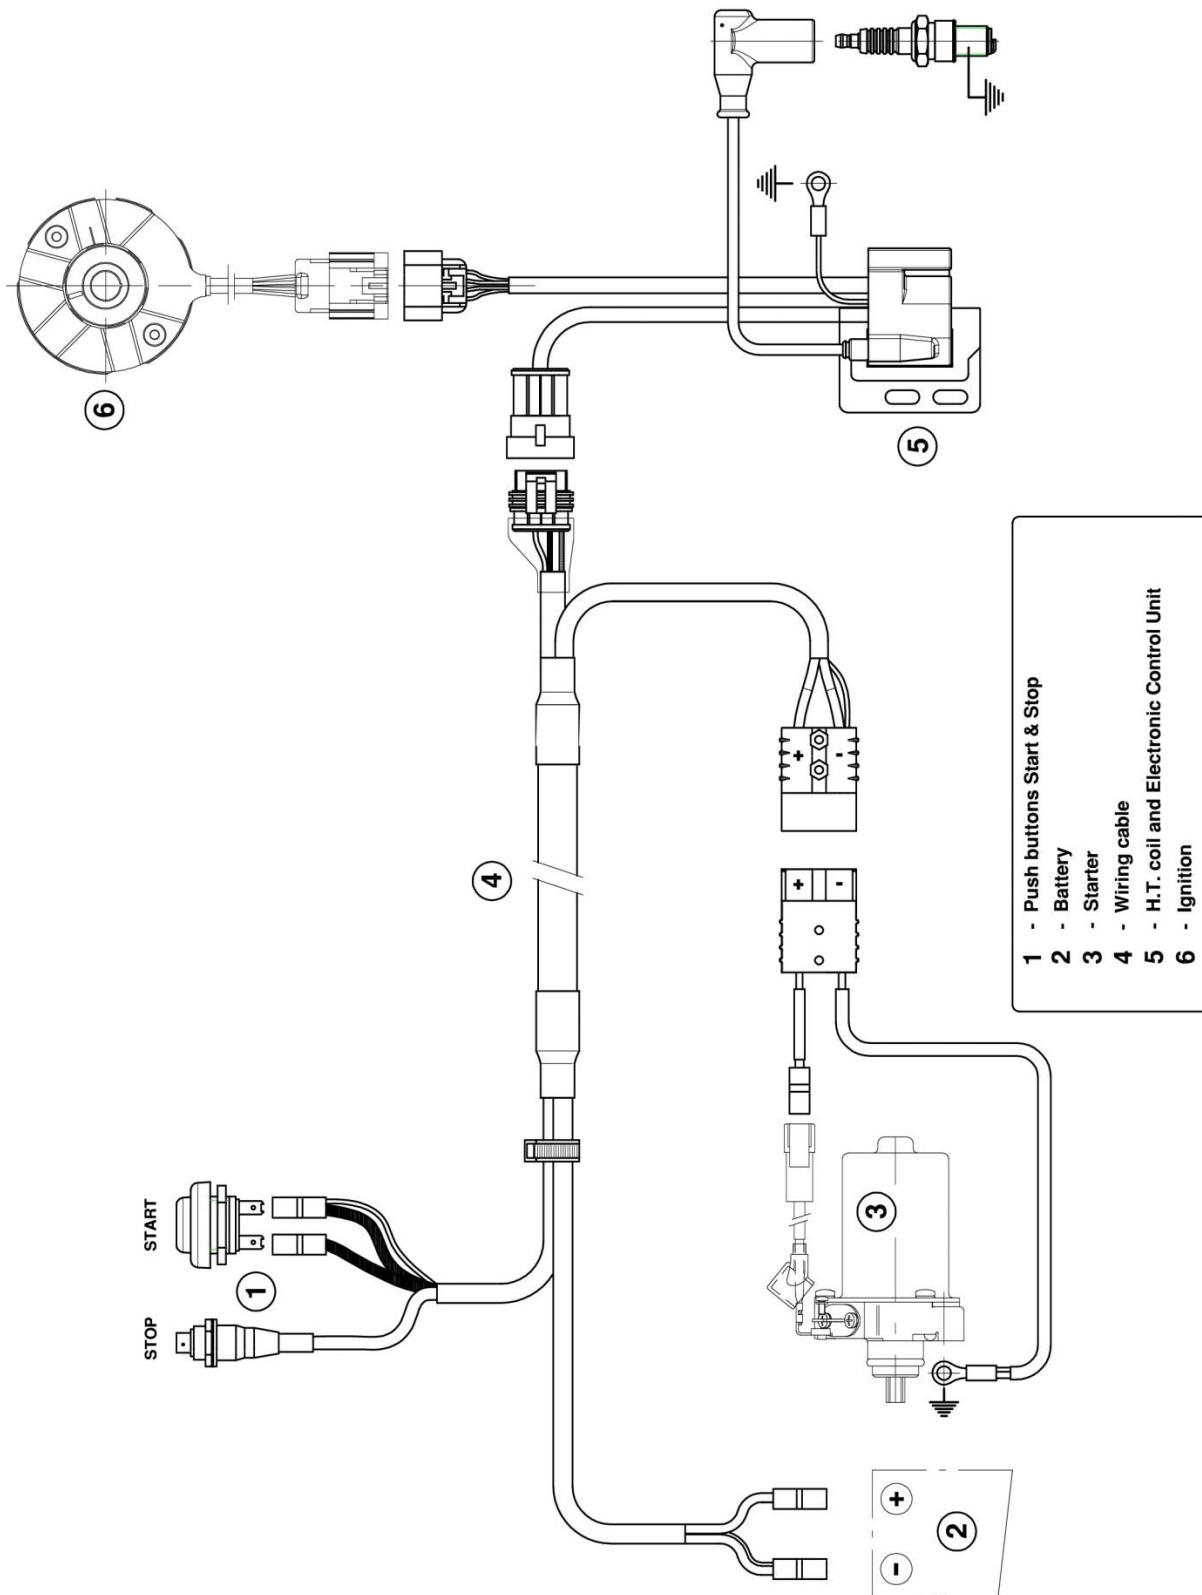
ALTERNATIVE WIRING DIAGRAM – PVL 690 DIGITAL IGNITION



ALTERNATIVE WIRING LOOM



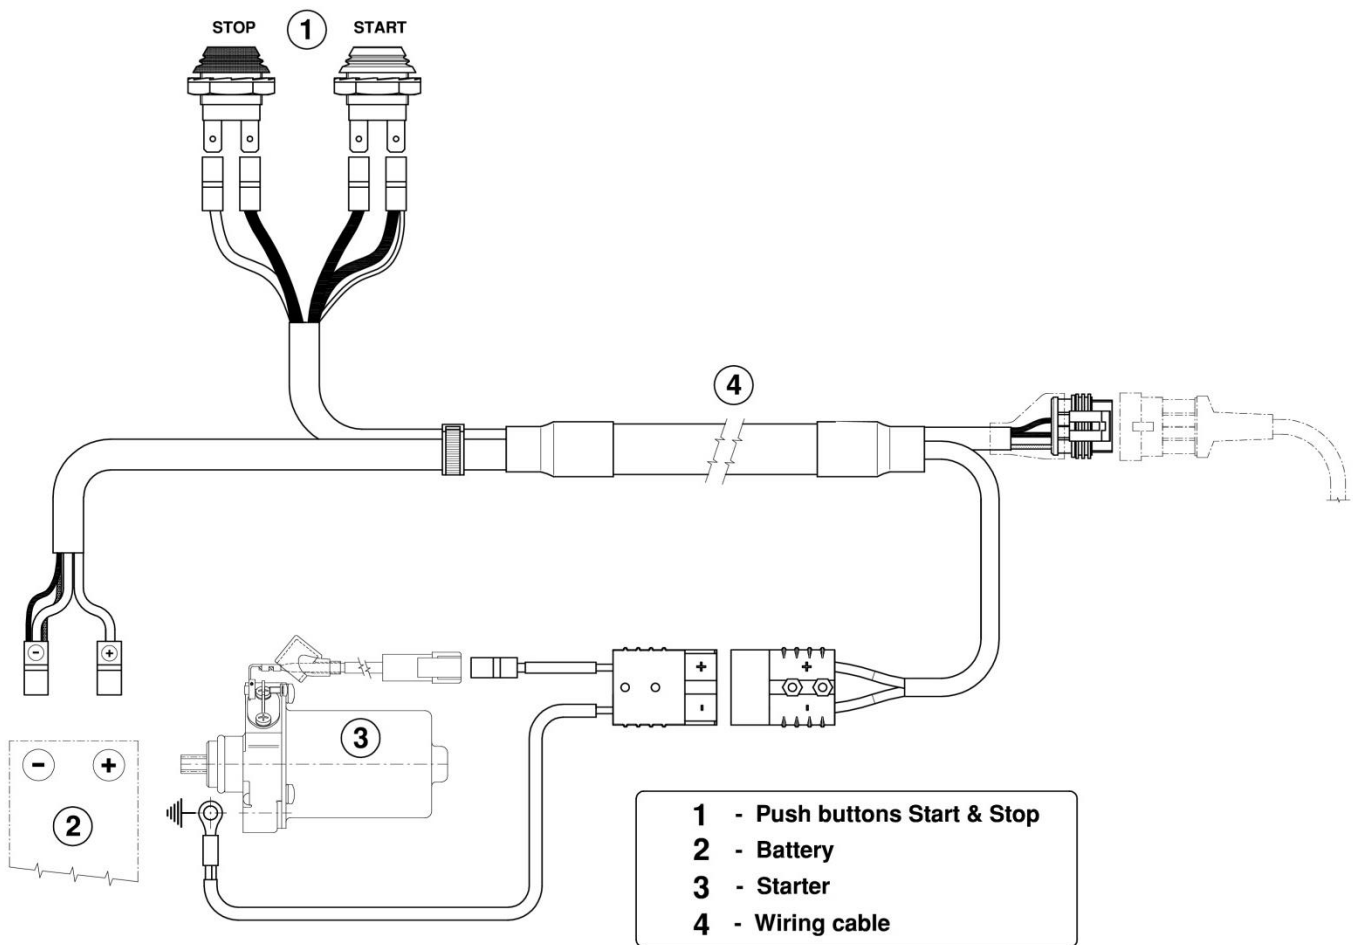
ALTERNATIVE WIRING LOOM DIAGRAM



ELECTRICAL SYSTEM


IGNITION SYSTEM – TYPE 3

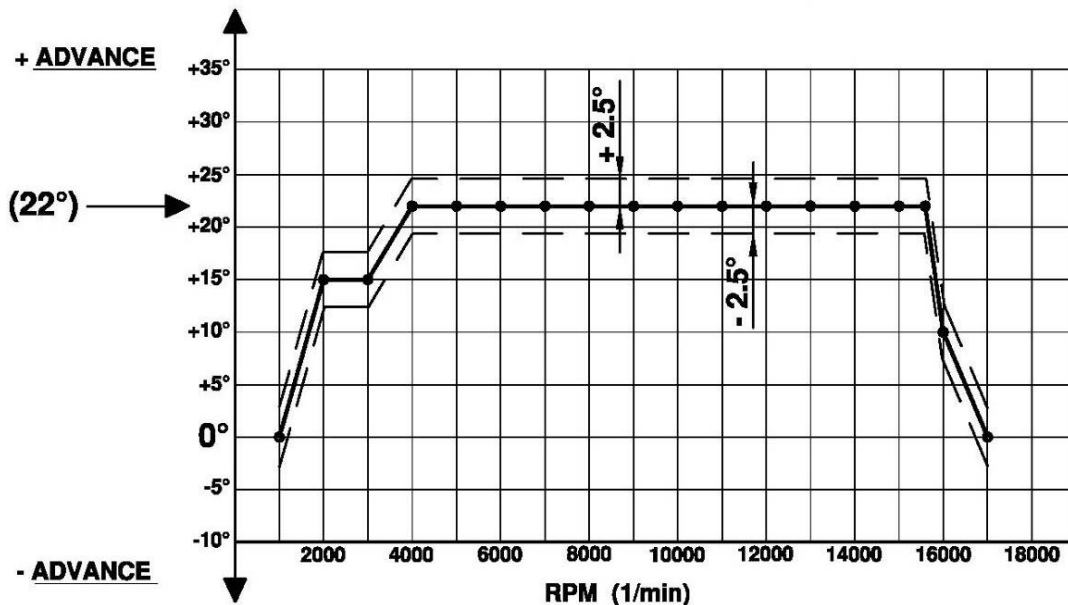ADVANCE CURVE GRAPHS – SELETTRA DIGITAL « S »




Ignition homologation No.	-																
Ignition homologation No.	-																
Ignition homologation No.	-																
Ignition homologation No.	-																
Code	SELETTRA (Rotor+Stator) : X30125953	Blue															
Code	SELETTRA (H.T. Coil with ECU) : X30125933AKA	Blue															
Tr / min	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000	12000	13000	14000	15500	16000	17000
°adv	0°	15°	15°	22°	22°	22°	22°	22°	22°	22°	22°	22°	22°	22°	22°	10°	0°

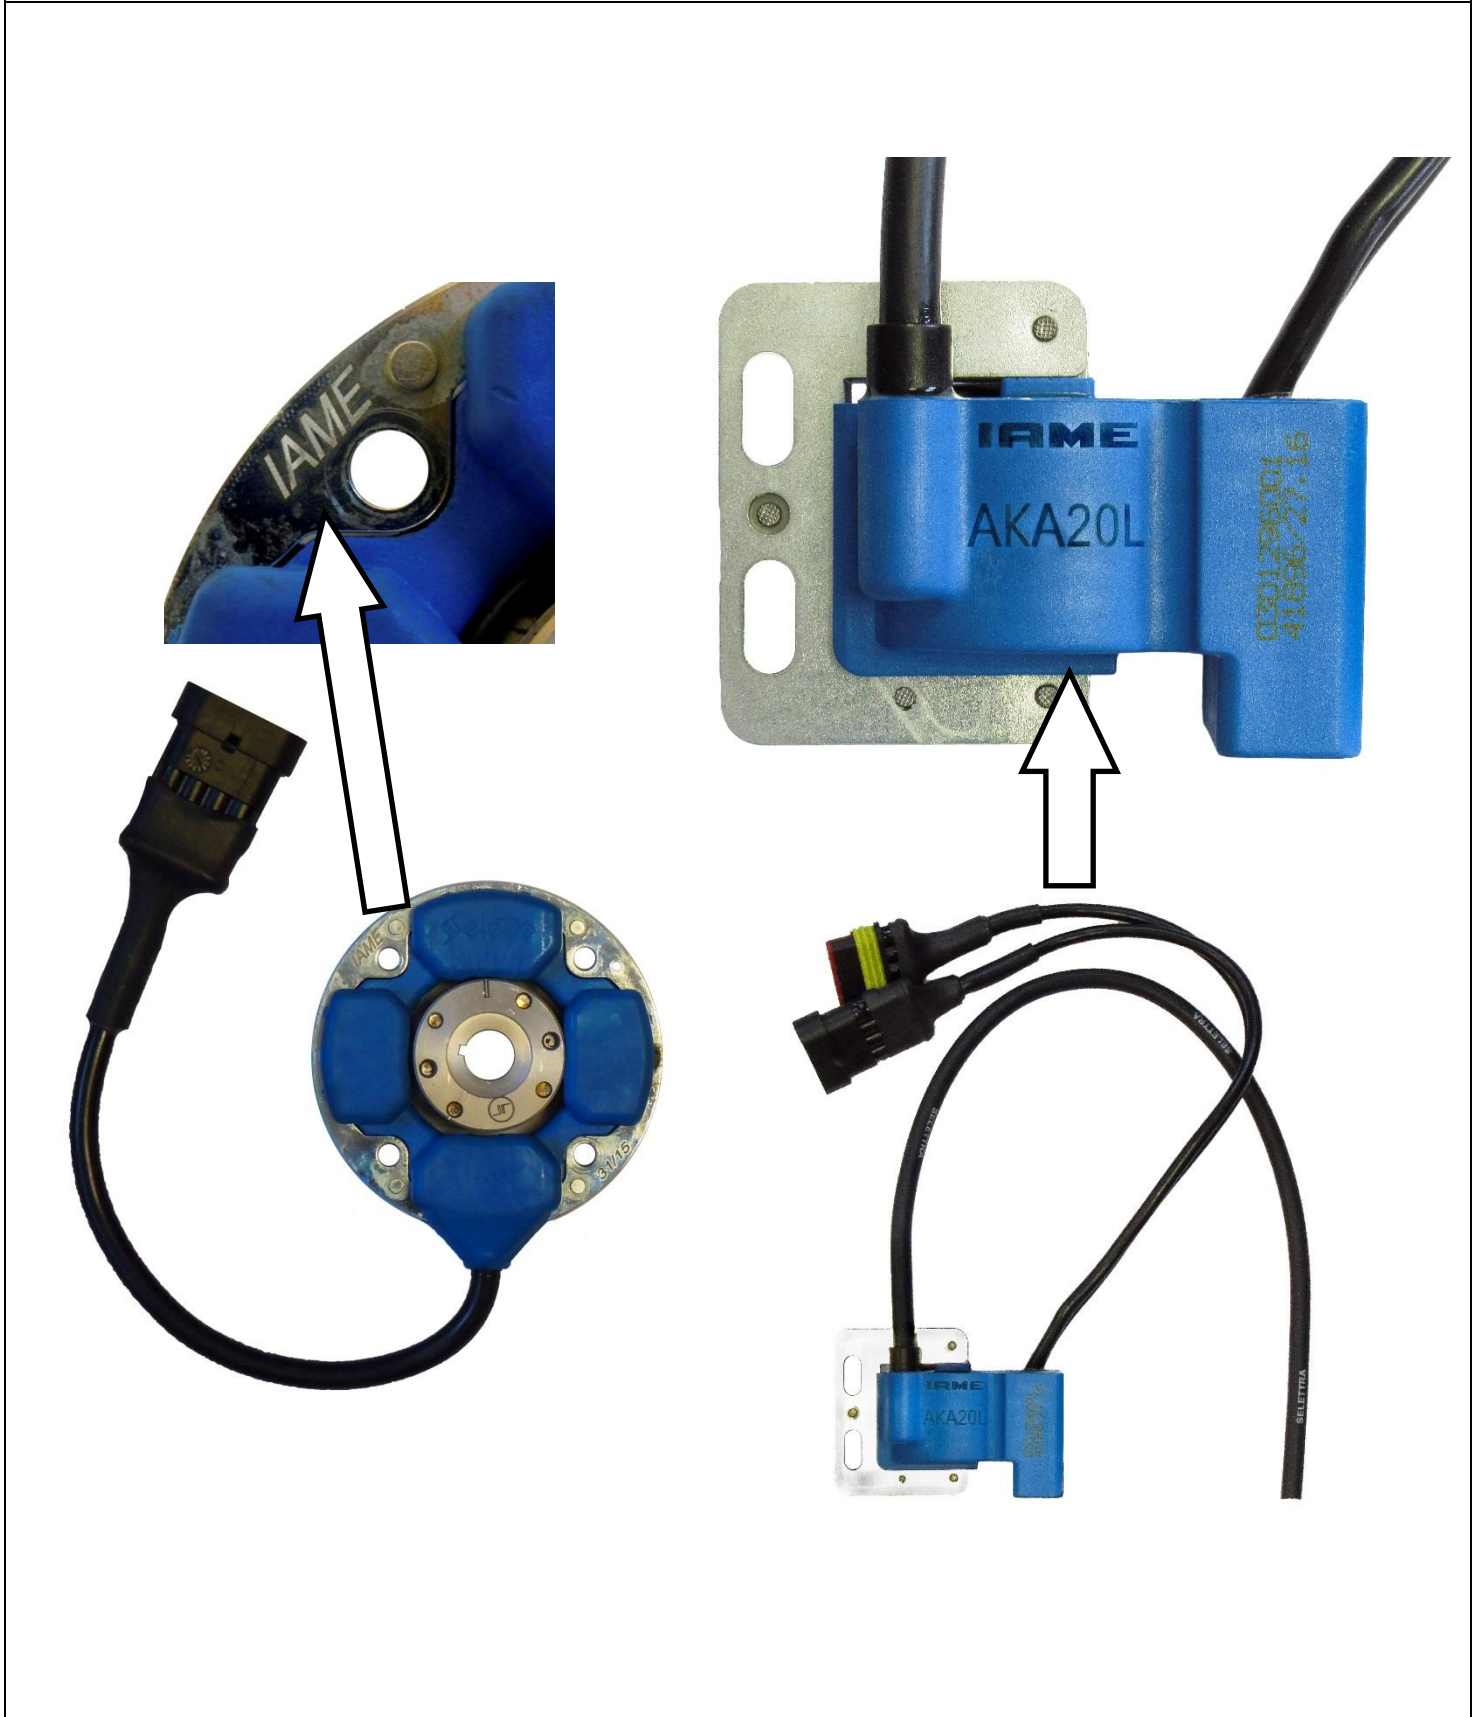
PHOTO OF SELETTRA ALTERNATIVE DIGITAL "S" IGNITION, WITH IAME MARKING



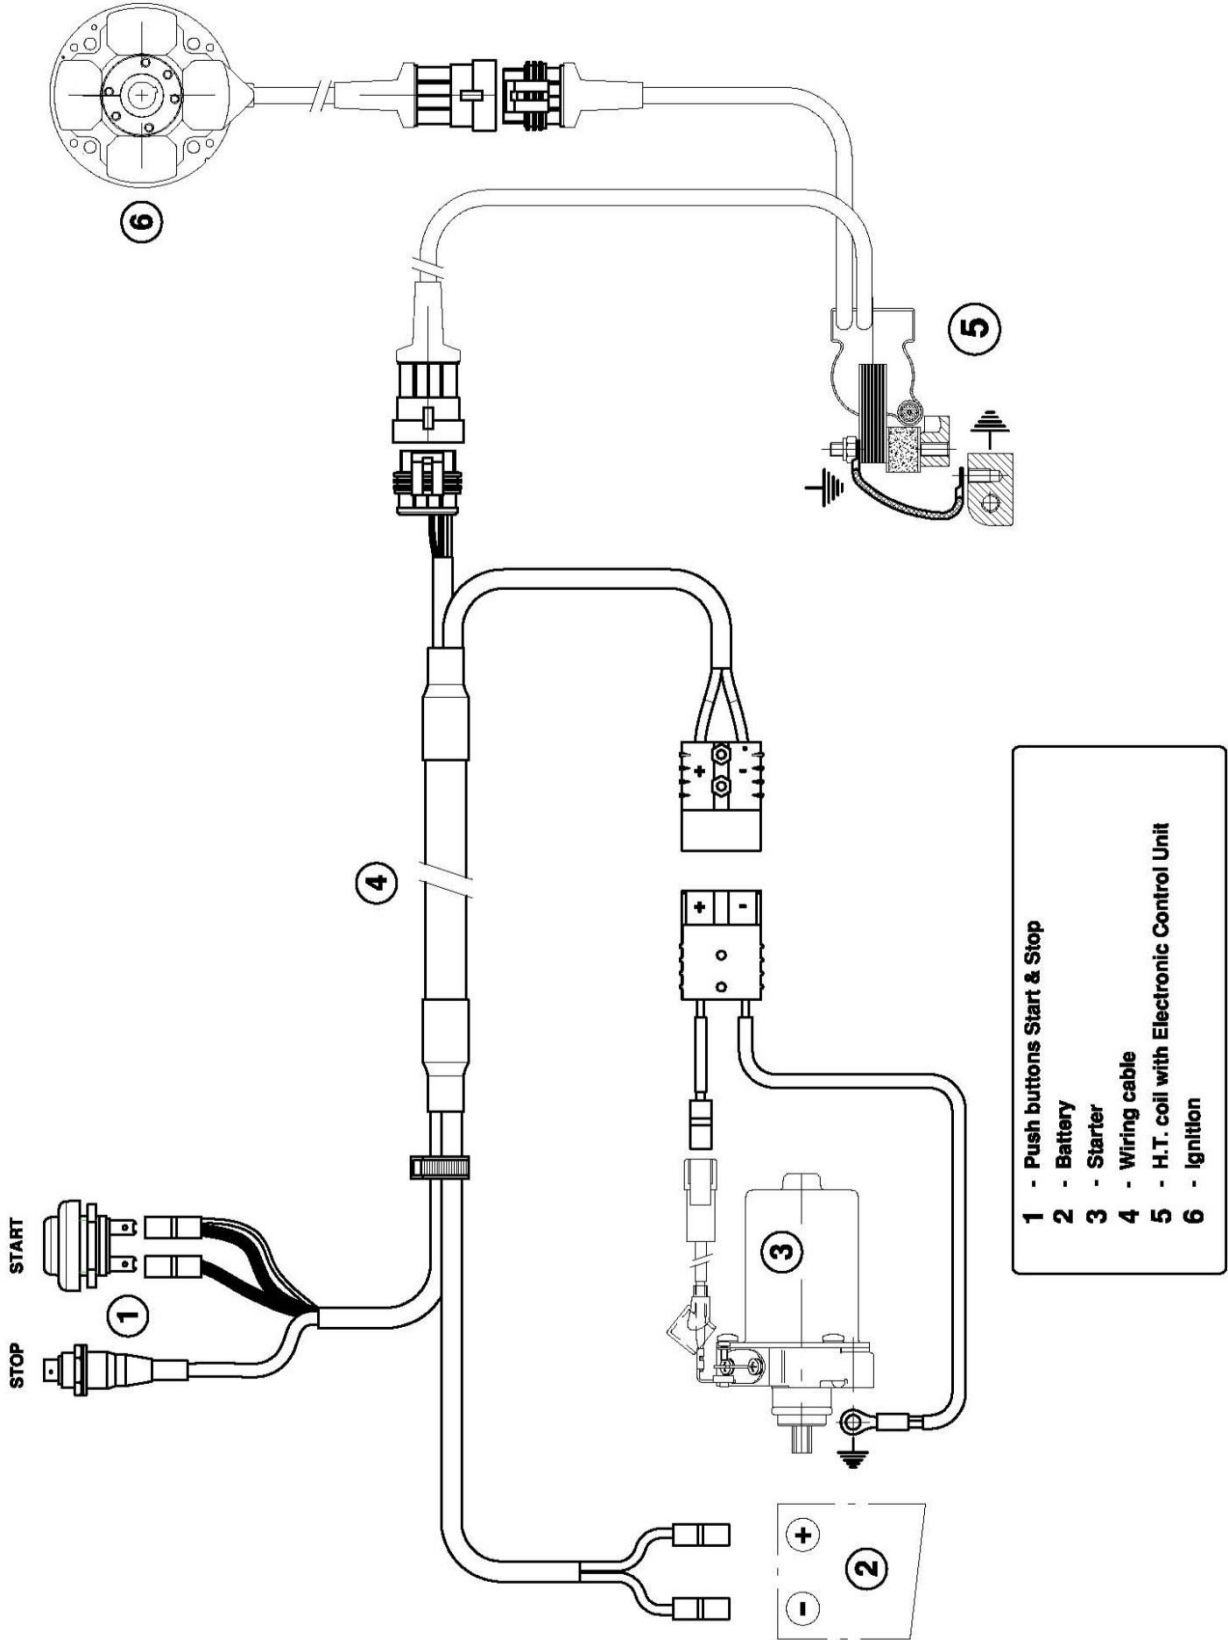
WIRING DIAGRAM (SELETTRA DIGITAL "S" IGNITION)



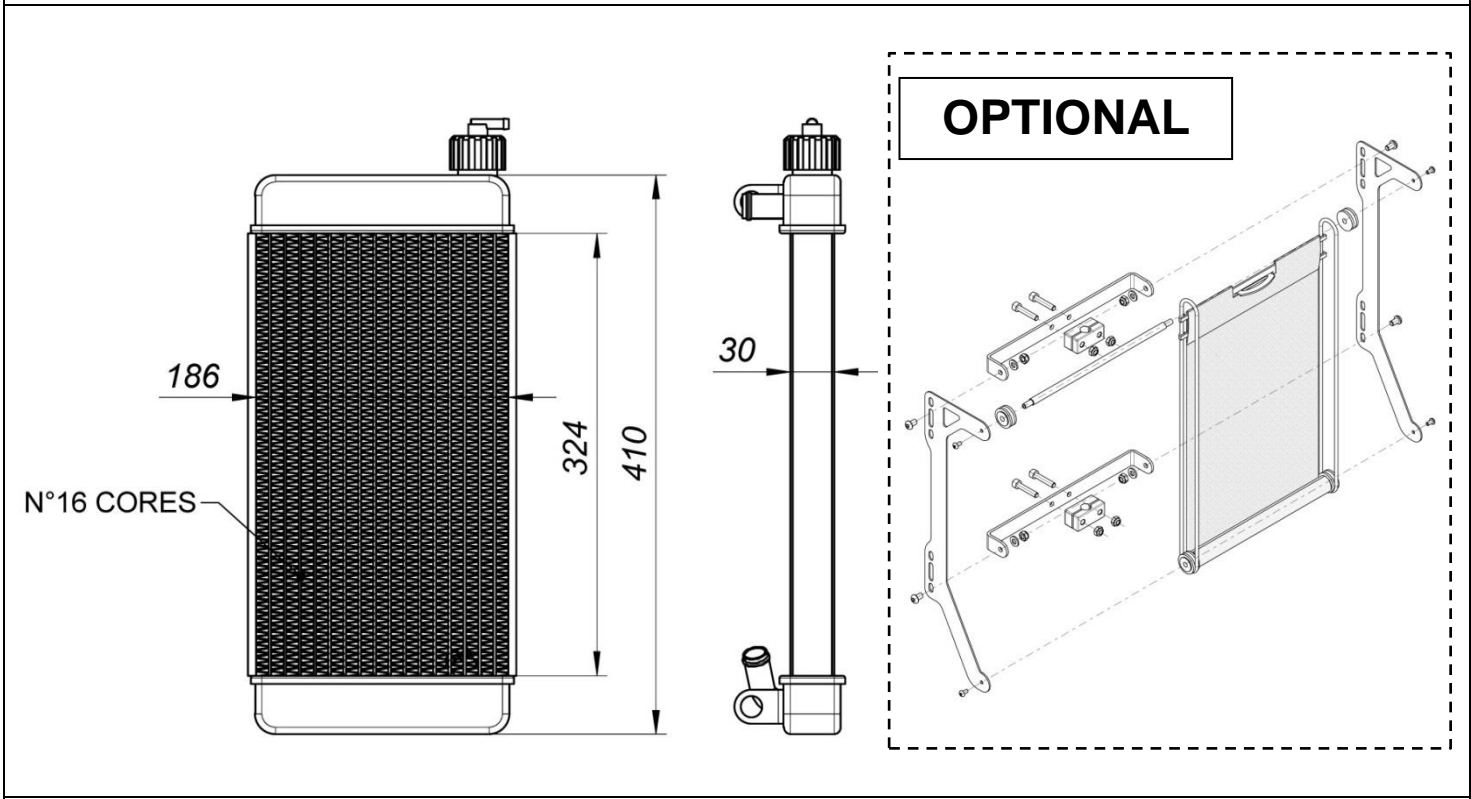
RADIATOR DRAWING AND DIMENSIONS – TYPE 1




RADIATOR – TYPE 1

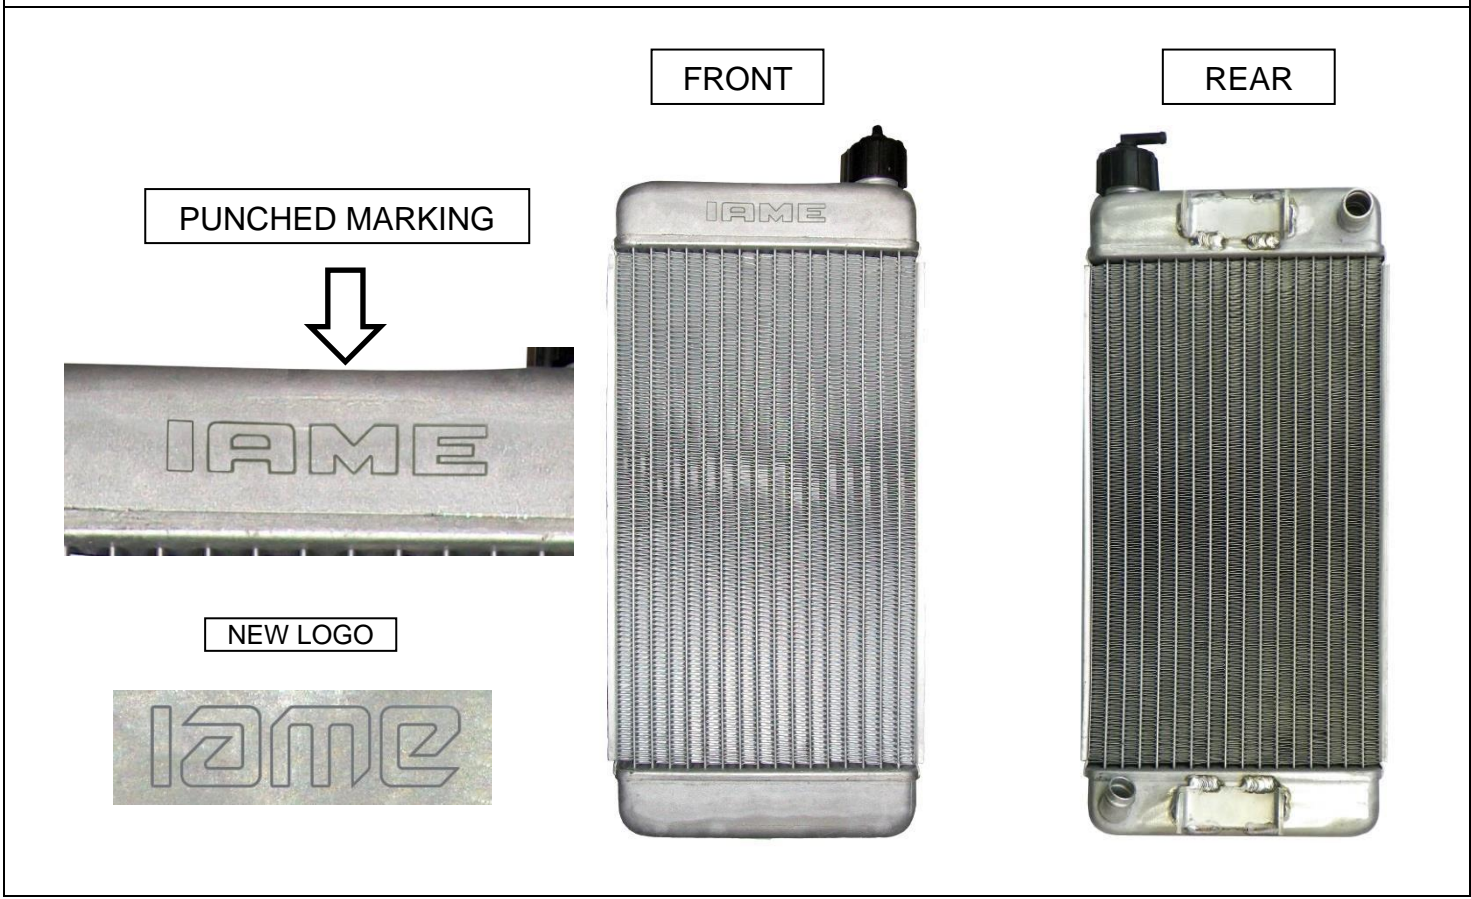


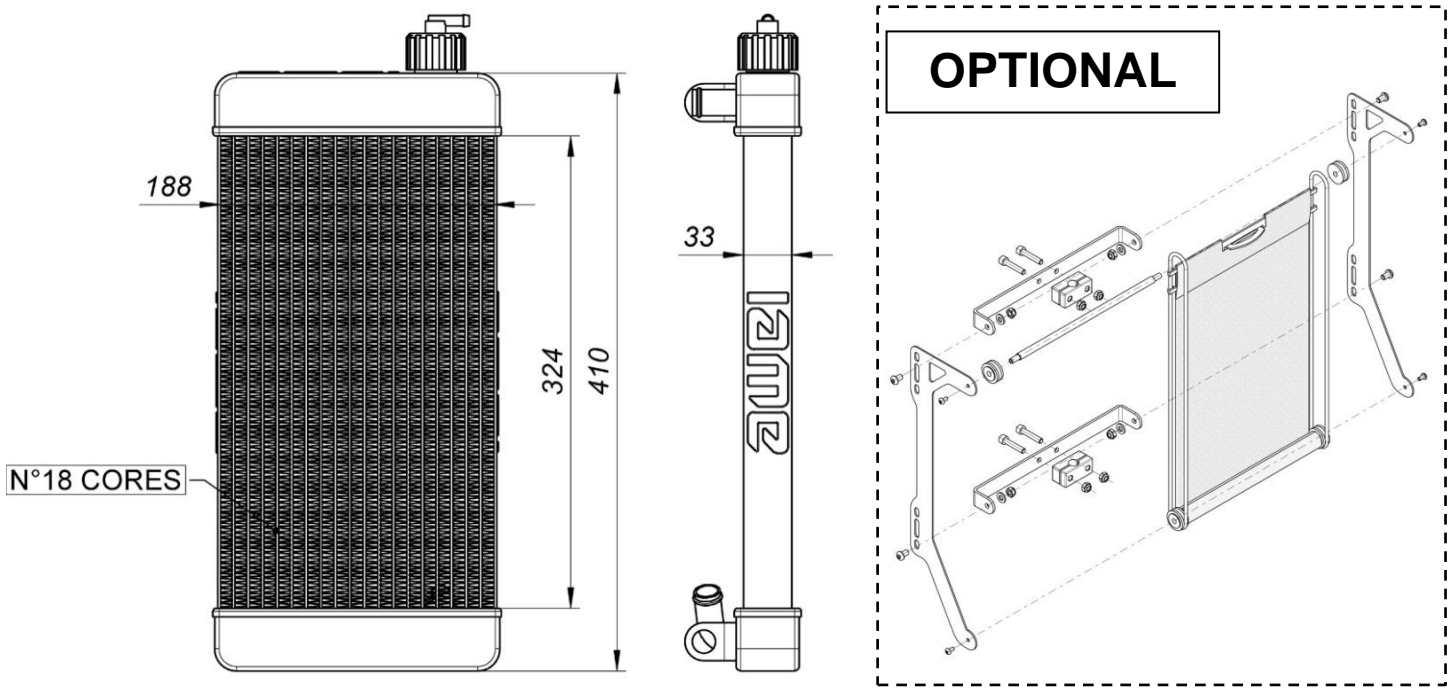
RADIATOR DRAWING AND DIMENSIONS – TYPE 2



RADIATOR – TYPE 2

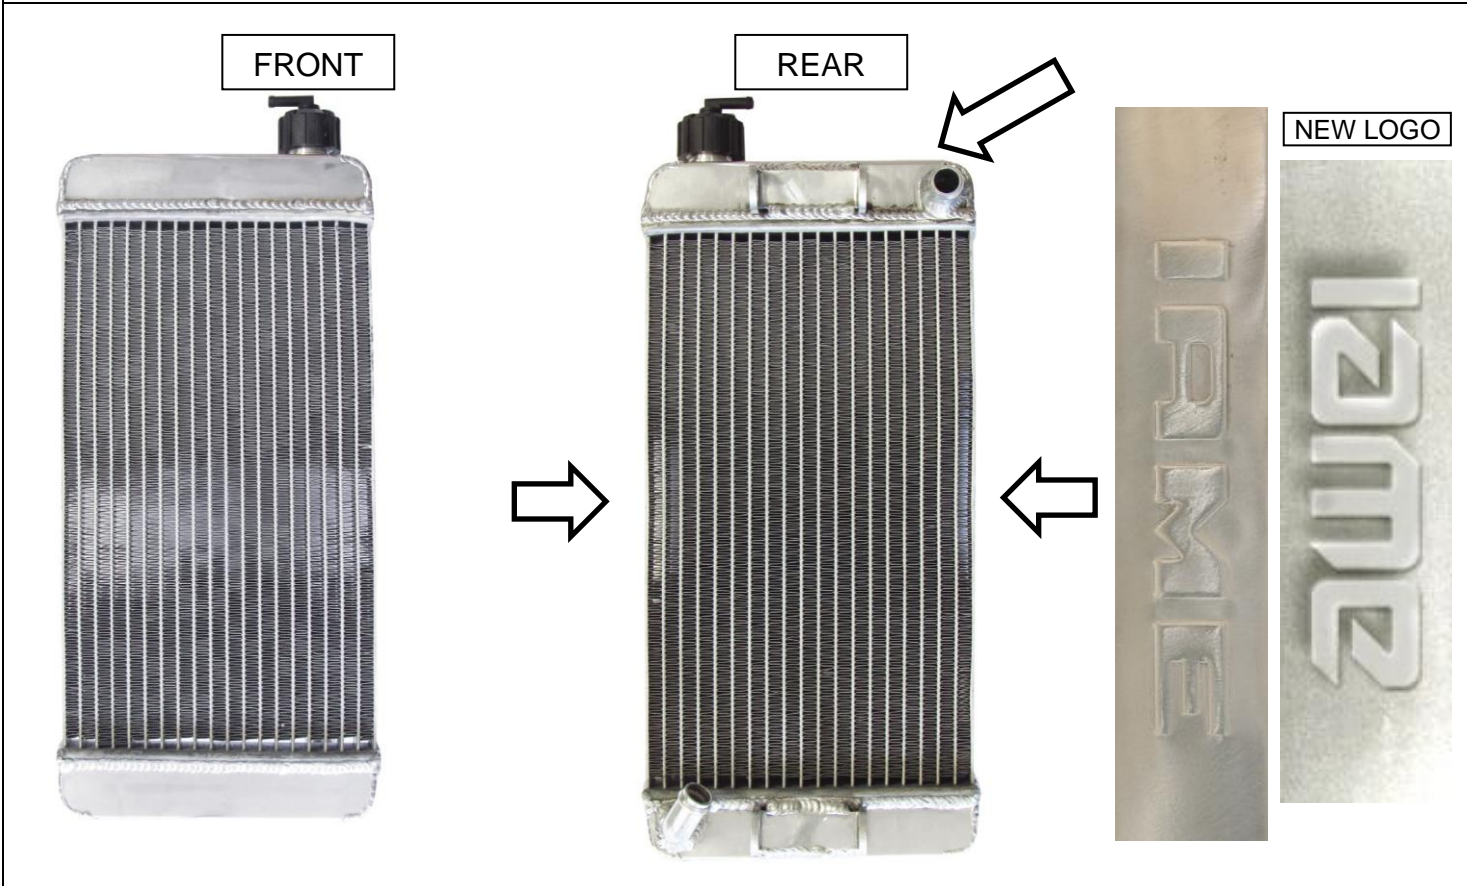

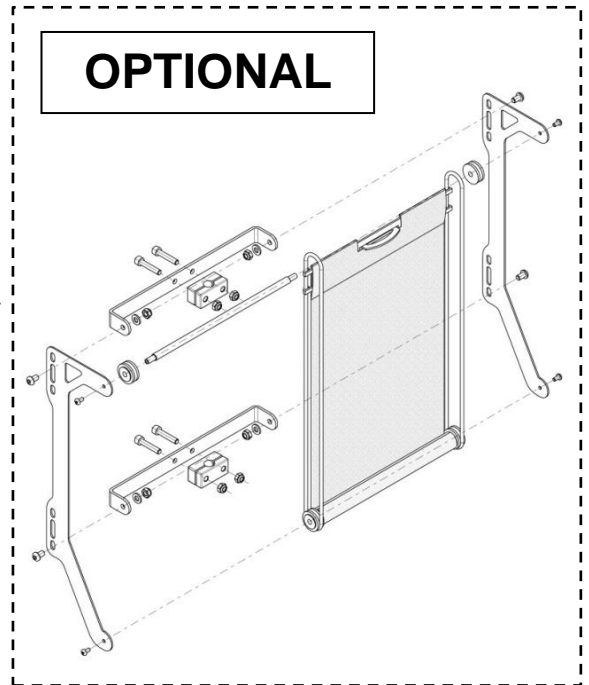
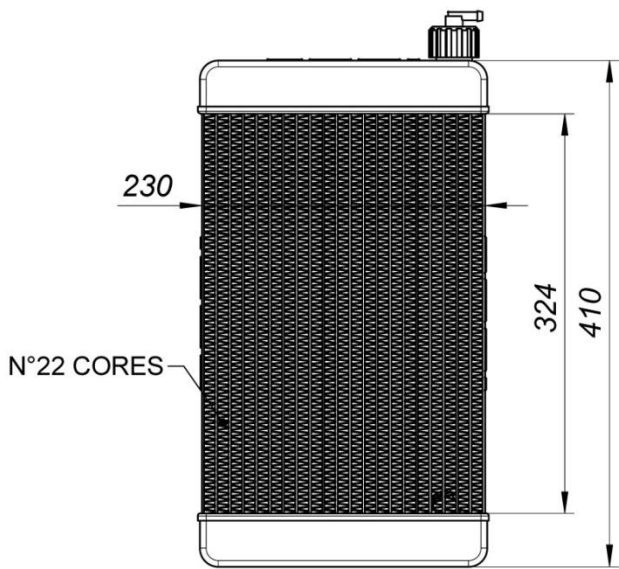
RADIATOR DRAWING AND DIMENSIONS – TYPE 3



RADIATOR – TYPE 3

FRONT

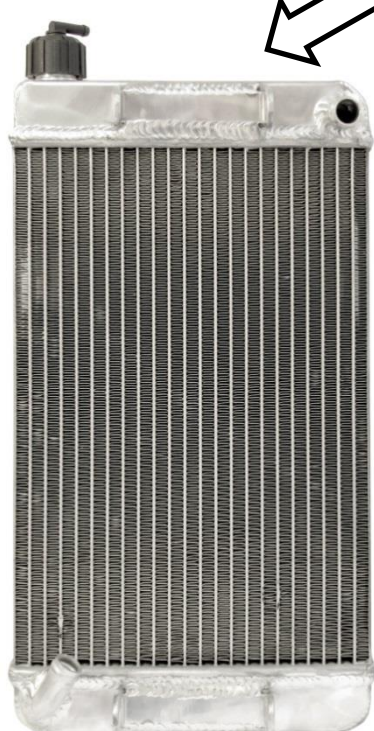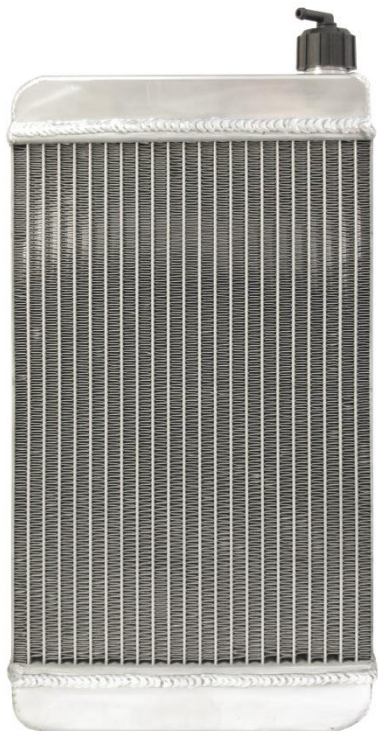
REAR



ADDITIONAL INFORMATION, DRAWING AND PHOTO IDENTIFICATION


ADDITIONAL TECHNICAL INFORMATION			
DESCRIPTION	QUANTITY	MATERIAL	NOTES / DIMENSIONS
Piston Rings	1	Iron	-
Balancing shaft	1	Steel	-
Exhaust muffler	1	Sheet-steel	-
Gears	-	Steel	-
Starter Ring	1	Steel	-
Big end conrod bearing diameters	1	-	20x26x15
Crankshaft bearing diameters	2	-	30x62x16
Small end conrod bearing diameters	1	-	14x18x17.5
Cooling System	-	-	Water
Inlet System	-	-	Reed Valve
Combustion chamber shape	-	-	Spherical
Centrifugal Clutch	-	-	Yes
Electric Starter	-	-	Yes

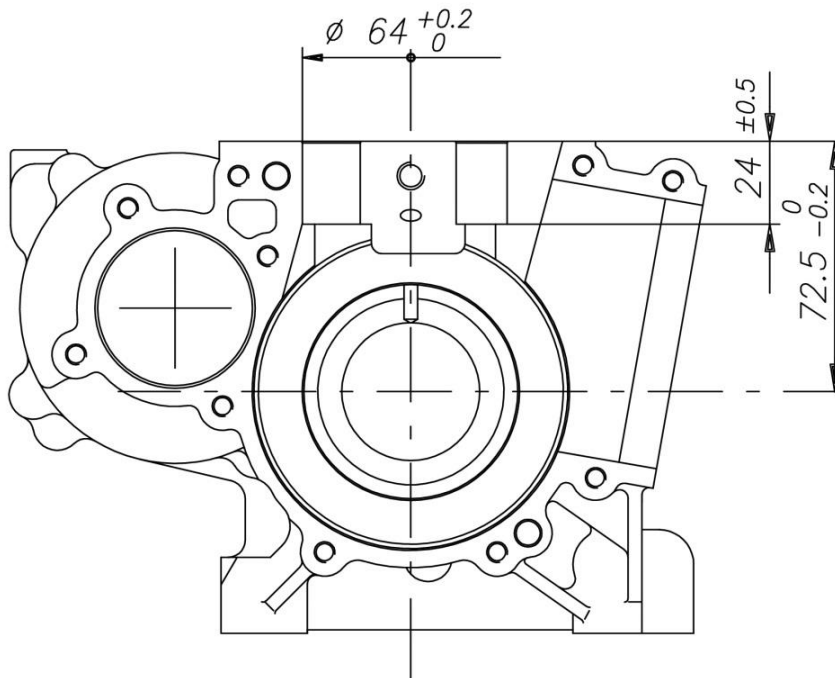CRANKCASE INSIDE VIEW



CRANKCASE ASSEMBLY DIMENSIONS

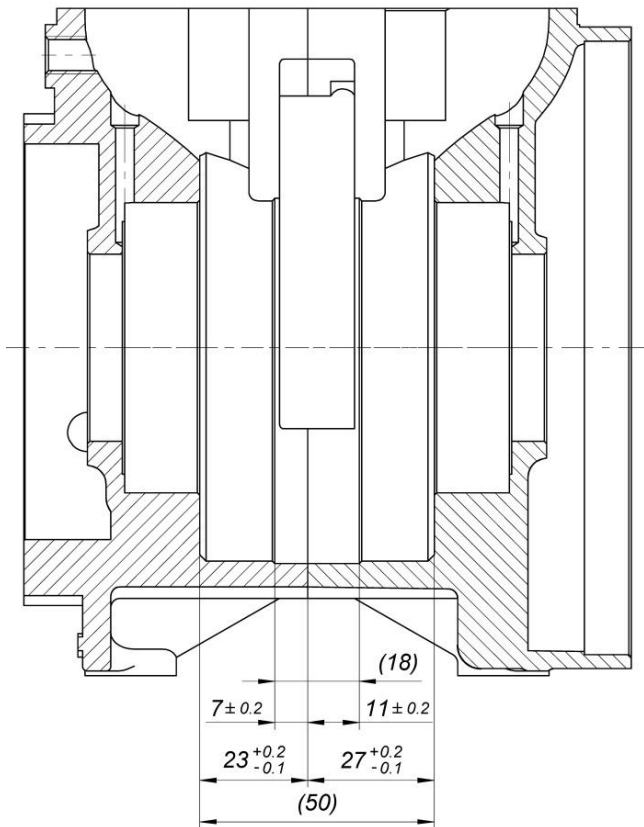
IGNITION SIDE DRIVE SIDE




CRANKSHAFT REPAIR BY HARD CHROMED

IGNITION SIDE

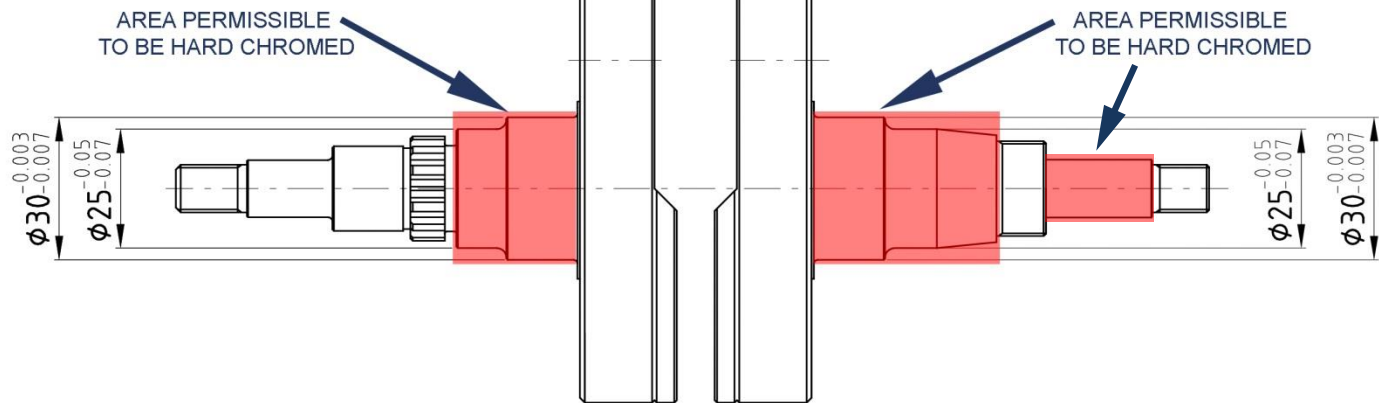
DRIVE SIDE



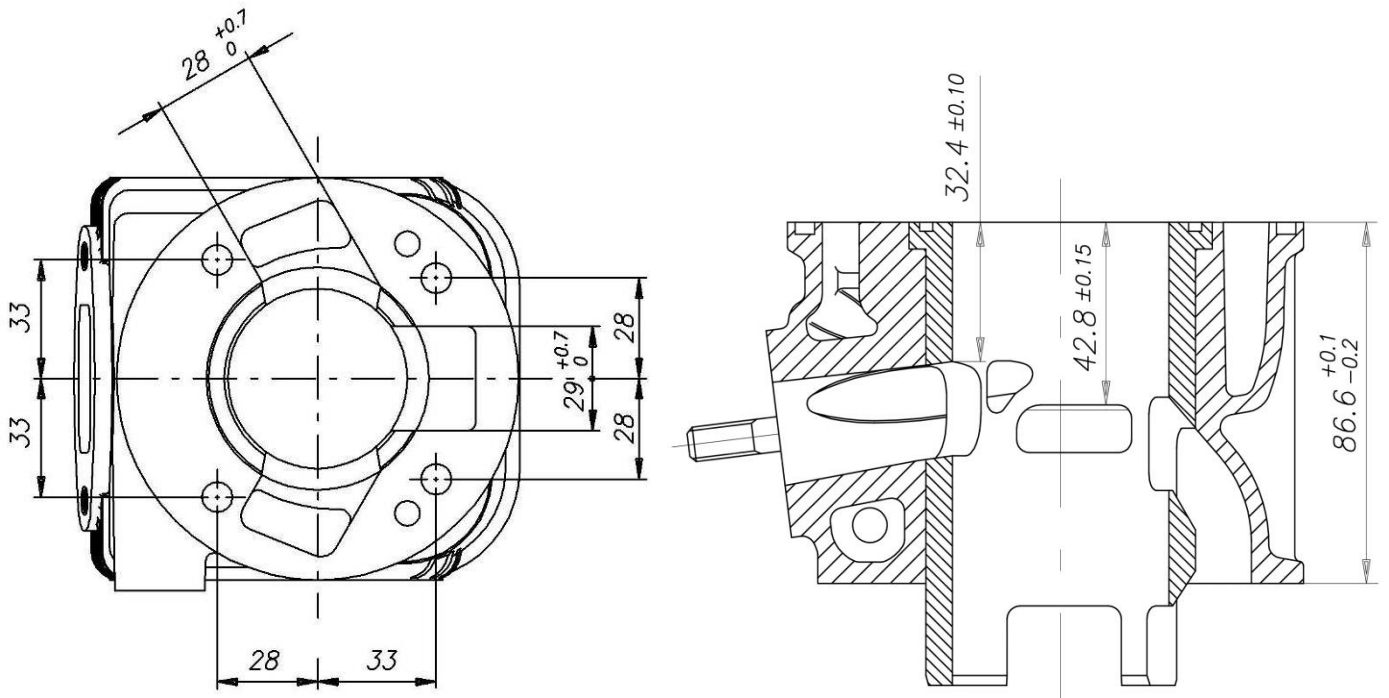CYLINDER BASE HOLES AND CROSS SECTION (with dimensions)




GEARS TIMING COMMAND BALANCING SHAFT

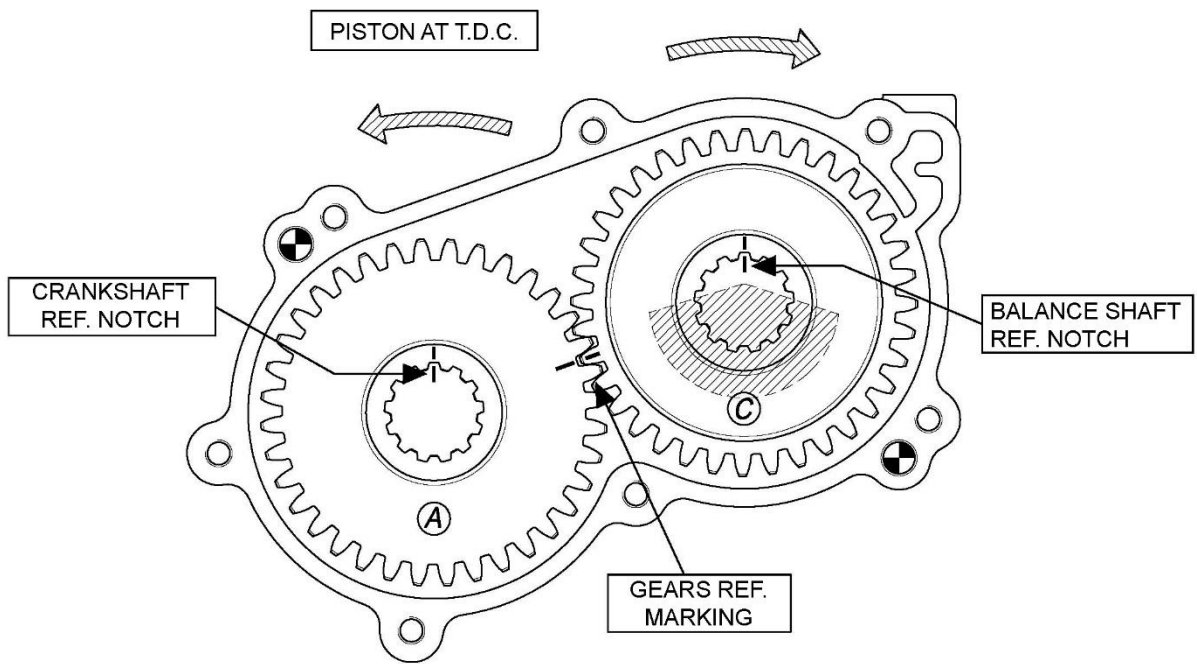


CLUTCH GROUP DRAWING AND ASSEMBLY – ALL TYPES

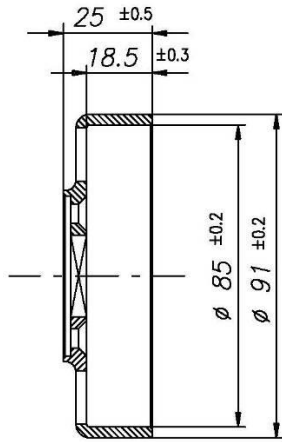P.N. X30125550




Min. weight 225 g

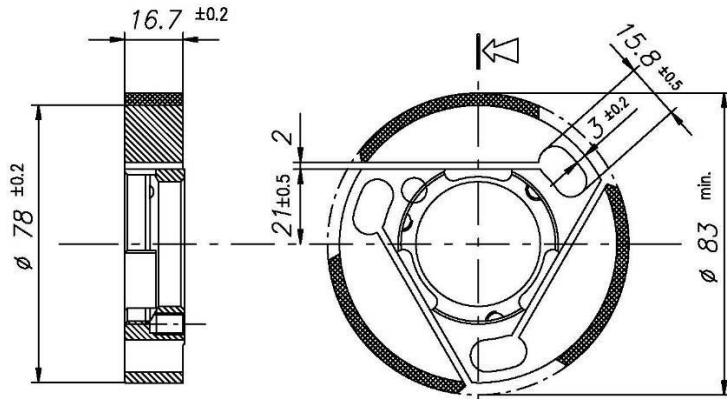P.N. X30125840




Min. weight 360 g

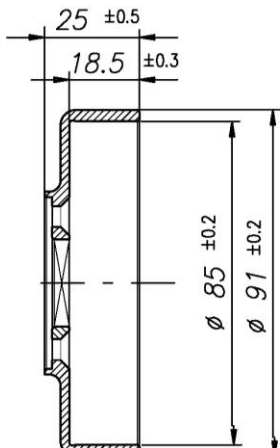P.N. X30125550A




Min. weight 225 g

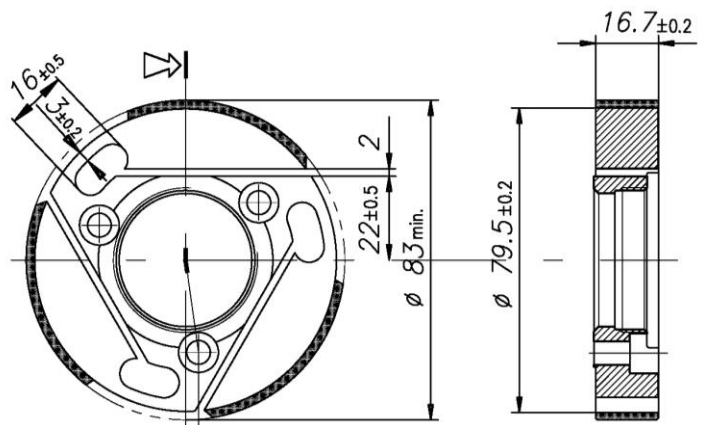P.N. X30125841




Min. weight 375 g

P.N. X30125550 & P.N. X30125554-C




Min. weight 300 g

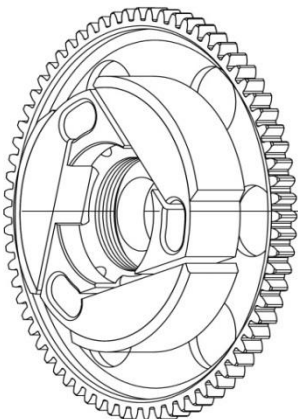P.N. X30125840 & P.N. X30125830




Min. weight 650 g

P.N. X30125550A & P.N. X30125554-C





Min. weight 300 g

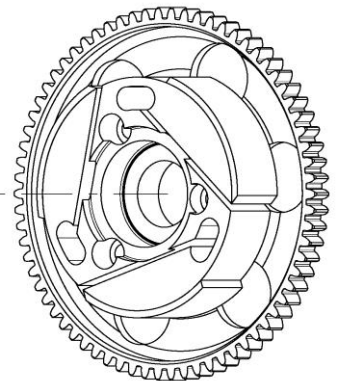P.N. X30125841 & P.N. X30125831





Min. weight 680 g

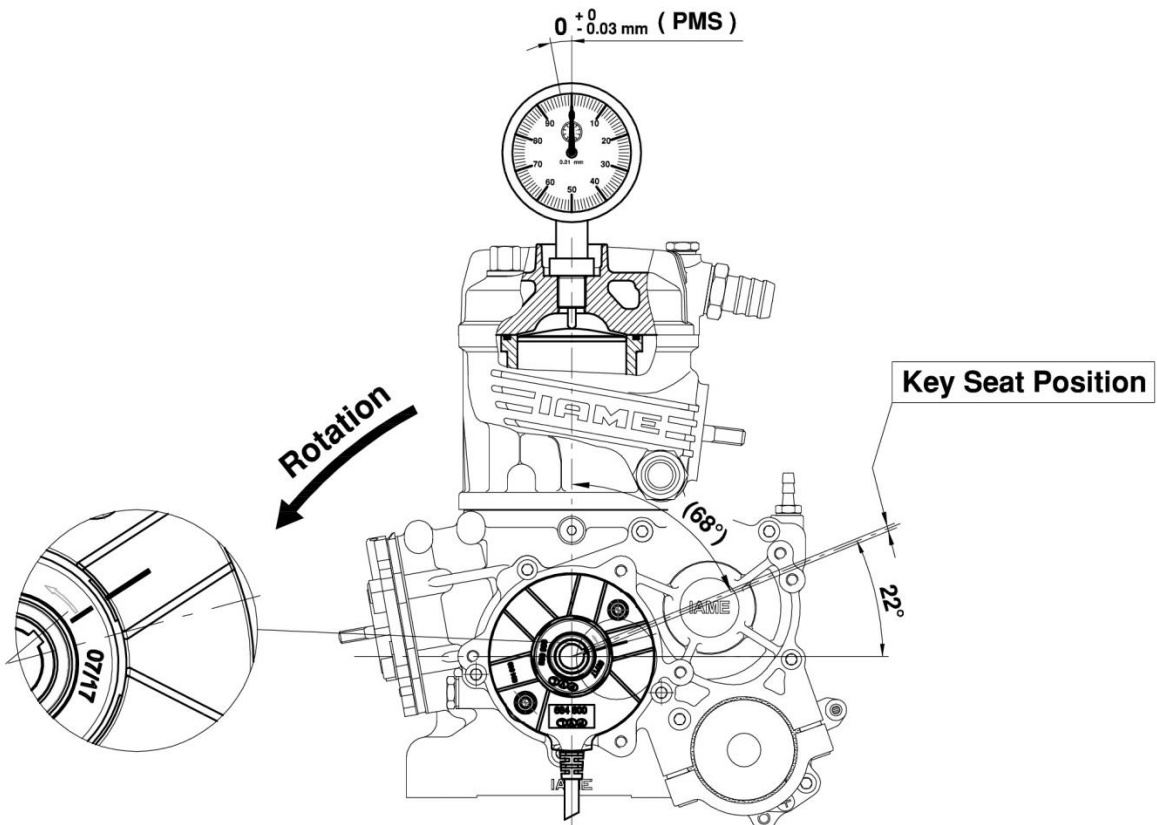
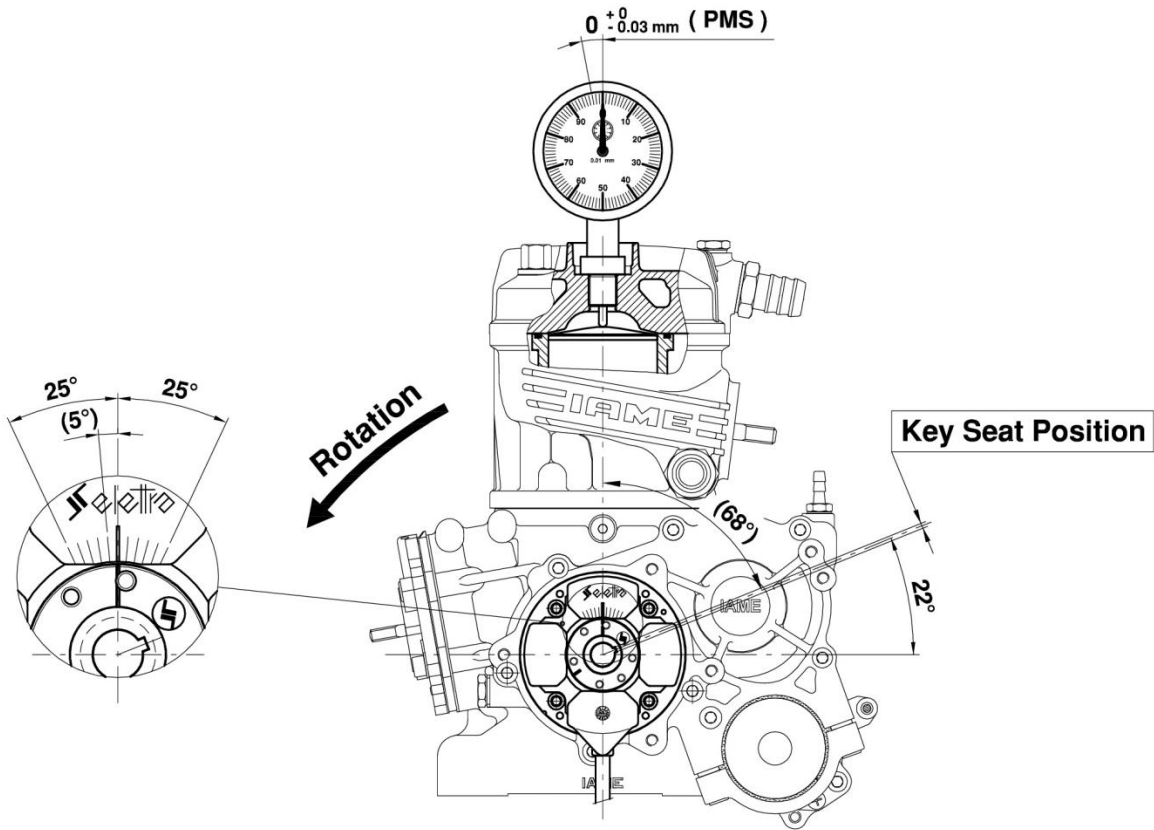
SCHEME FOR ADVANCE CONTROL




PISTON IDENTIFICATION MARKING

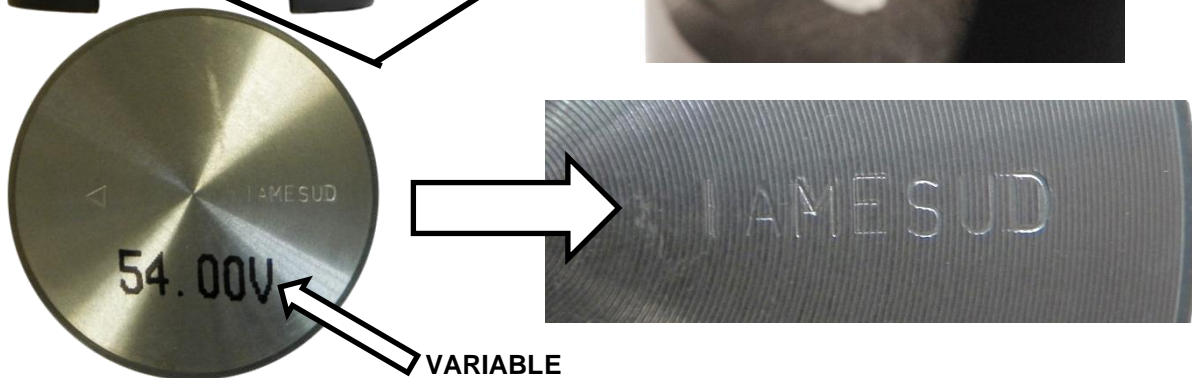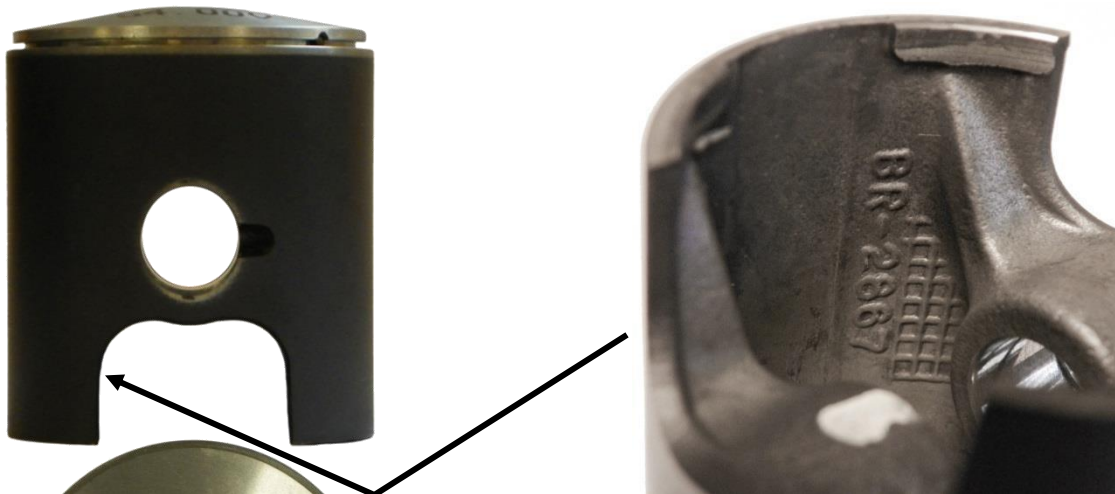


ALTERNATIVE

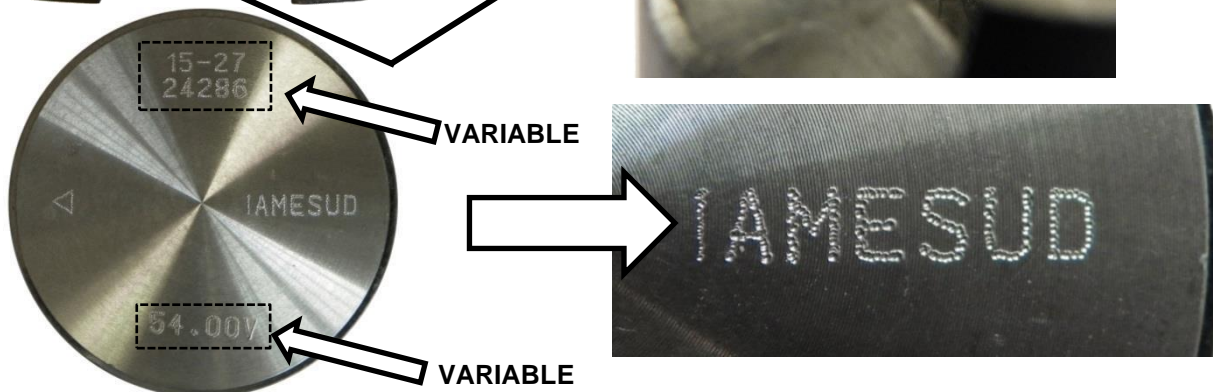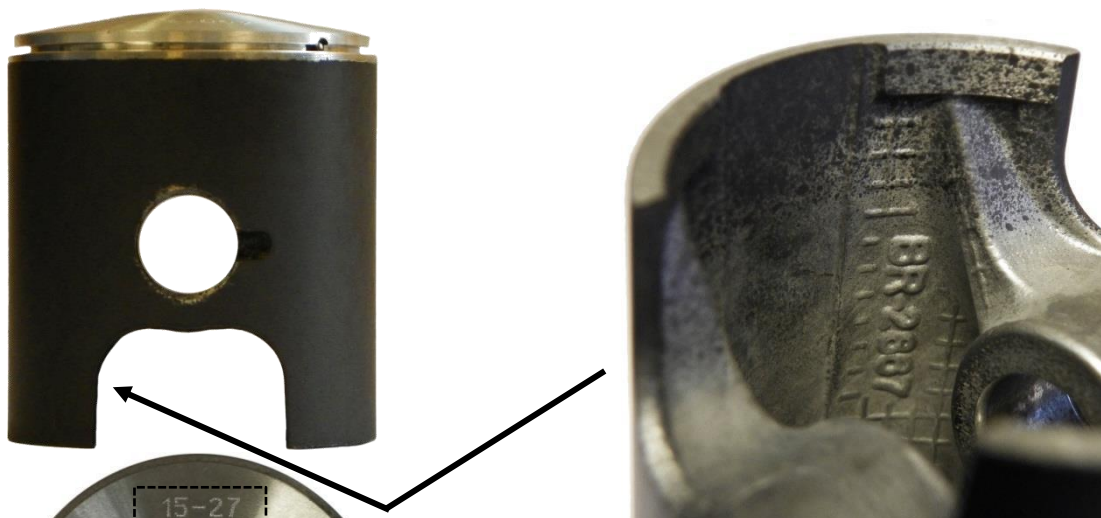

CRANKSHAFT IDENTIFICATION MARKING

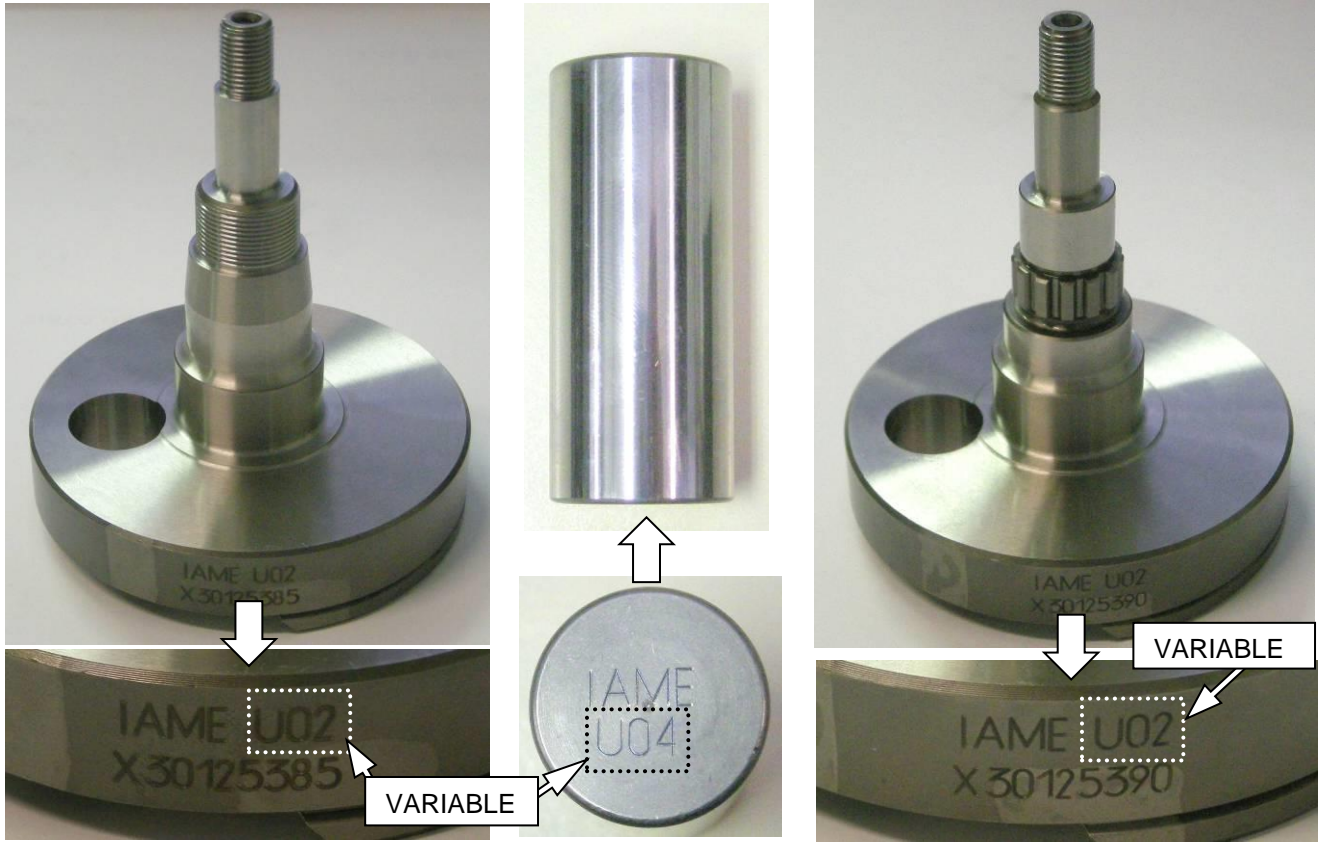

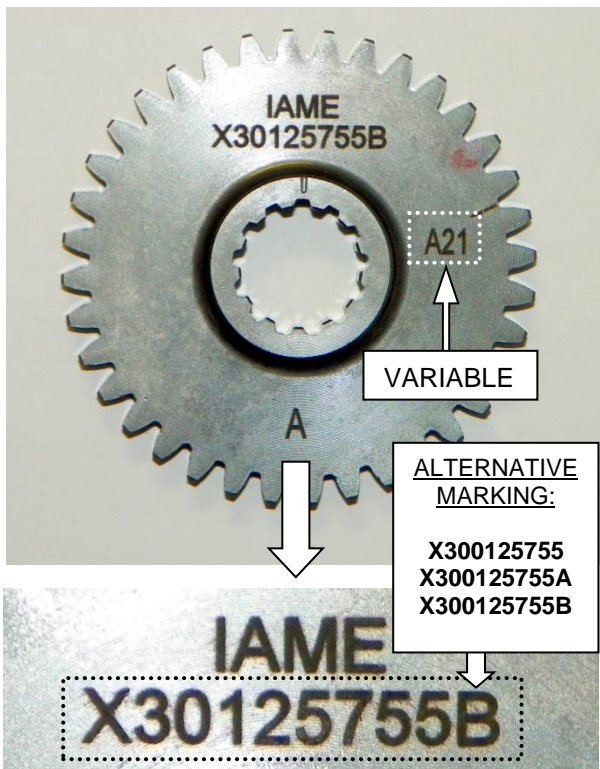DRIVE GEAR FOR BALANCE SHAFT IDENTIFICATION MARKING




STARTER IDENTIFICATION MARKING



CLUTCH HUB IDENTIFICATION MARKING
 - TYPE 1 -



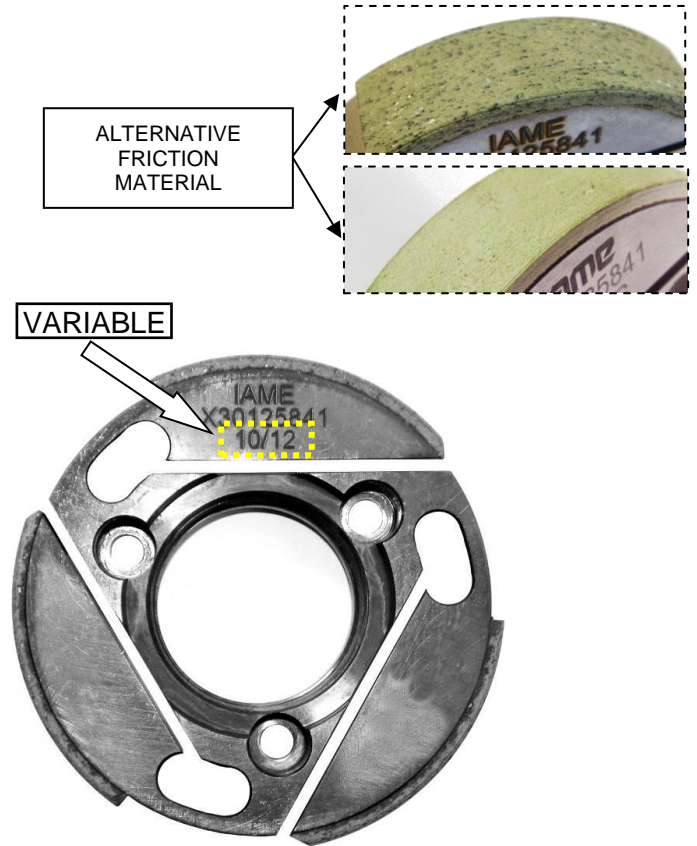CLUTCH HUB IDENTIFICATION MARKING
 - TYPE 2 -



CLUTCH DRUM IDENTIFICATION MARKING



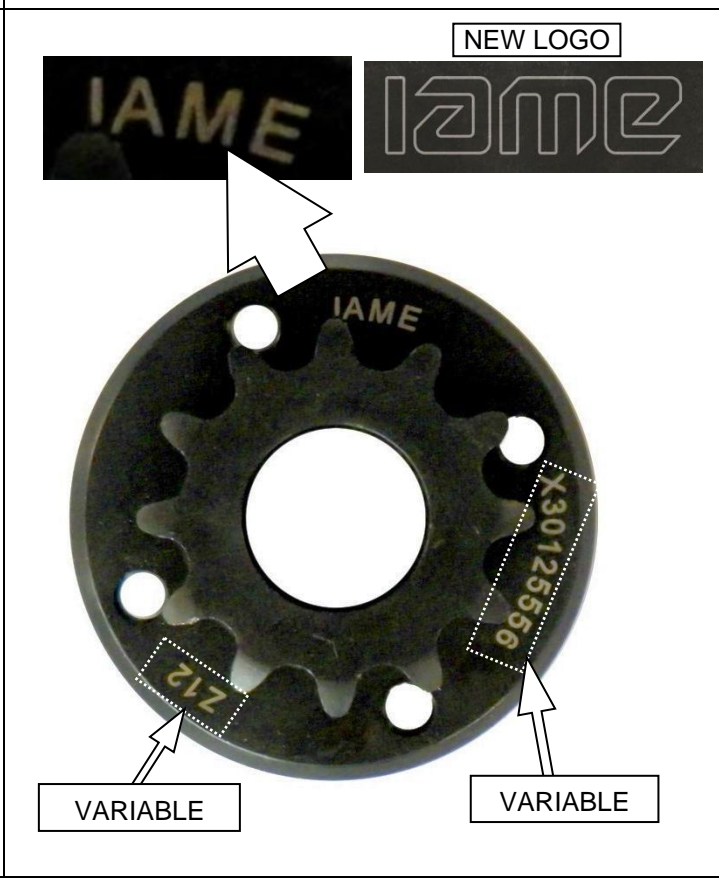
CLUTCH DRUM IDENTIFICATION MARKING




CLUTCH COVER IDENTIFICATION MARKING



SPROCKET IDENTIFICATION MARKING



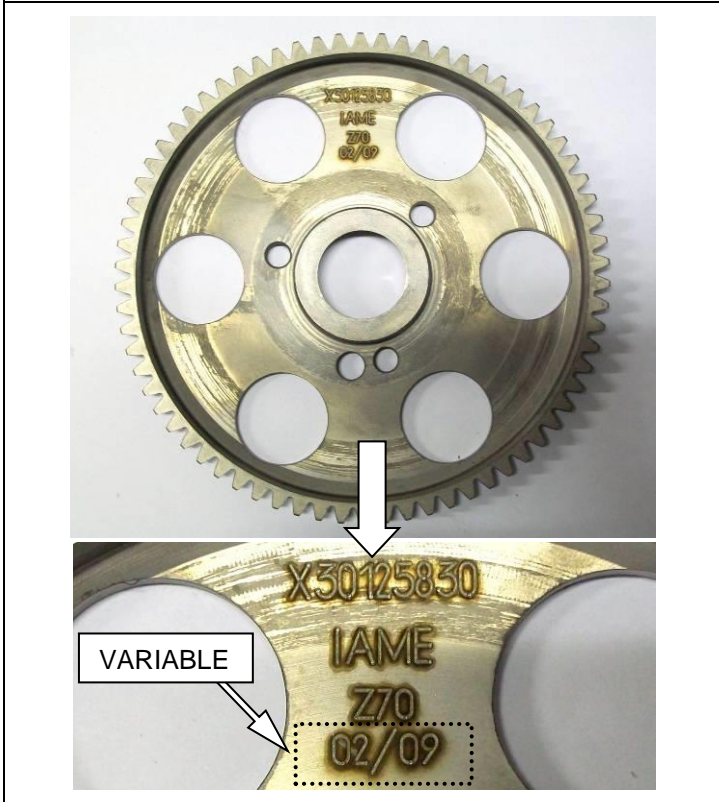STARTER RING IDENTIFICATION MARKING - TYPE 1 -




STARTER RING IDENTIFICATION MARKING - TYPE 2 -



REED PETALS DIMENSIONS

It is permitted to use either Carbon Fibre or Fibreglass Reed Petals

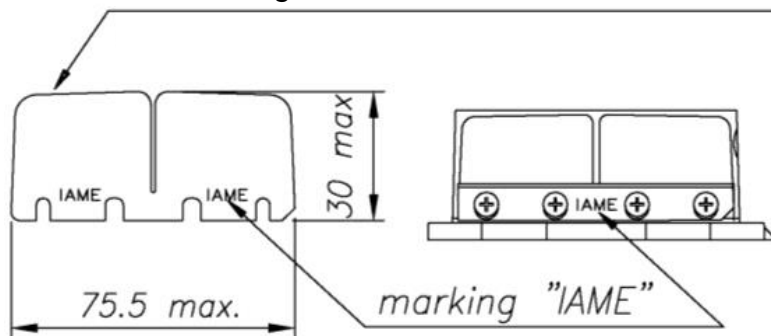IAME Carbon Fibre Reed Petals min. thickness = 0.22mm
IAME Fibreglass Reed Petals min. thickness = 0.30mm




REED PETALS – IMAGES AND IDENTIFICATION MARKS


CARBON FIBRE

FIBREGLASS

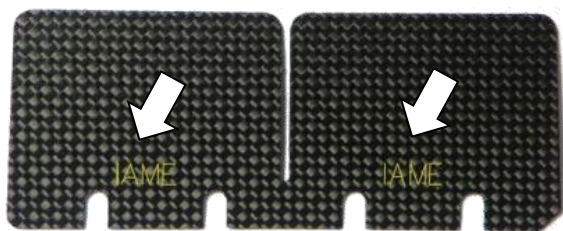
Front Side




Front Side

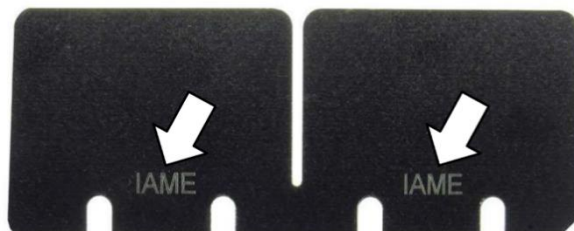

Rear Side

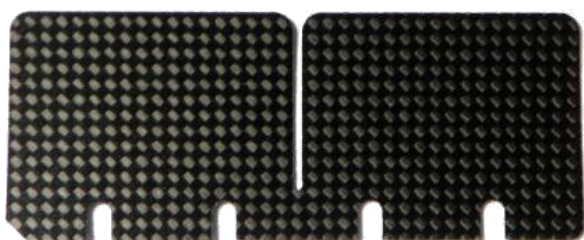

Rear Side

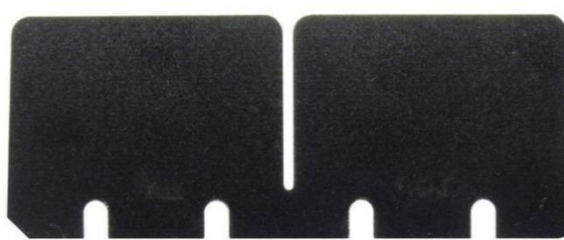



BENDIX COVER IDENTIFICATION MARKING



ALTERNATIVE

VARIABLE IN COLOUR

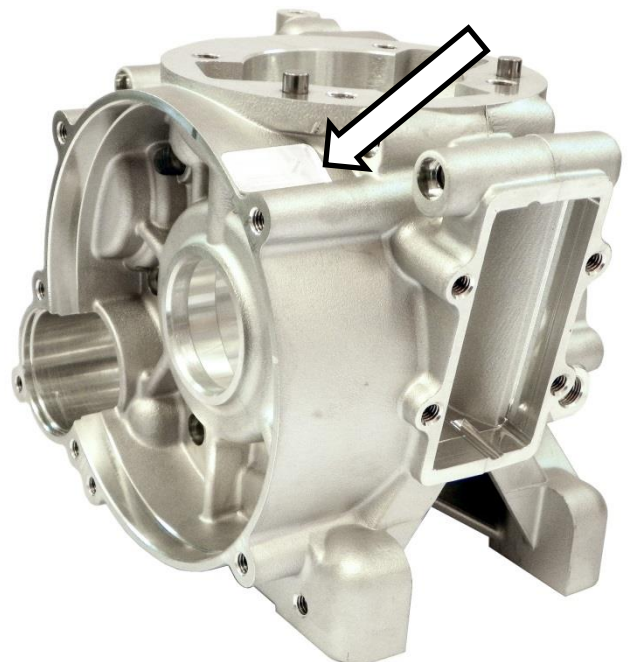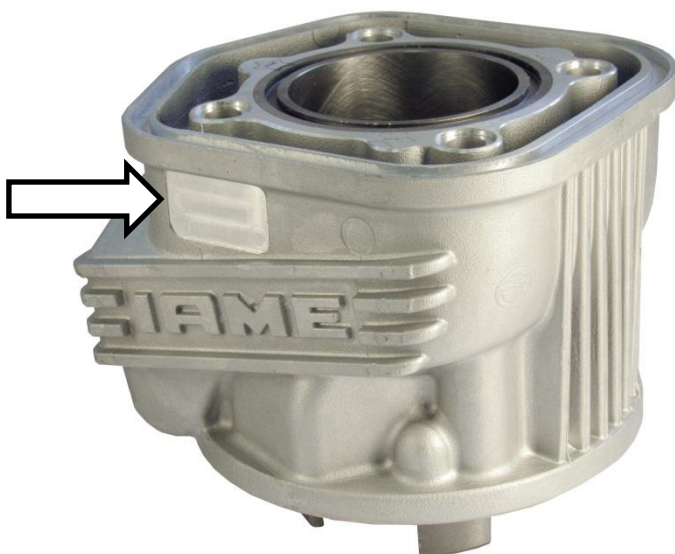STICKER APPLICATION AREA



INLET SILENCER - "IAME" IDENTIFICATION MARKING

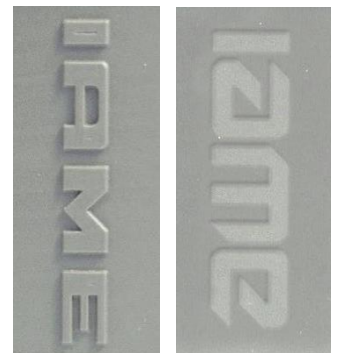
VARIABLE IN COLOUR



ALTERNATIVE LOGO




NEW LOGO




INLET SILENCER OUTLET LOCATION

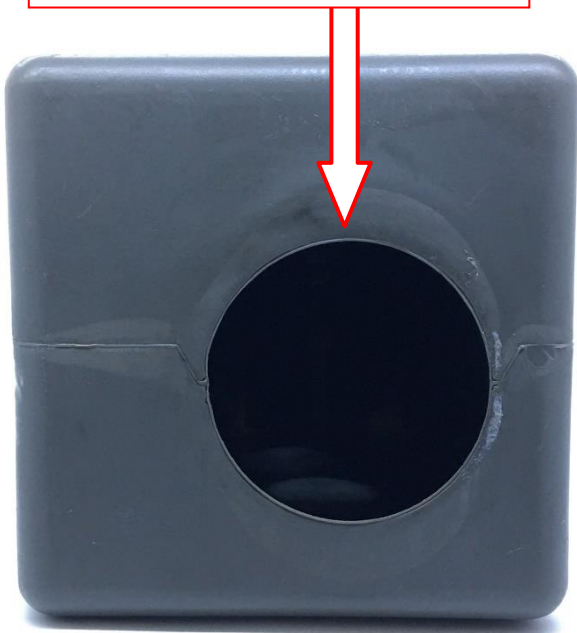ORIGINAL RIGHT ALIGNED OUTLET



ALTERNATIVE LEFT ALIGNED OUTLET

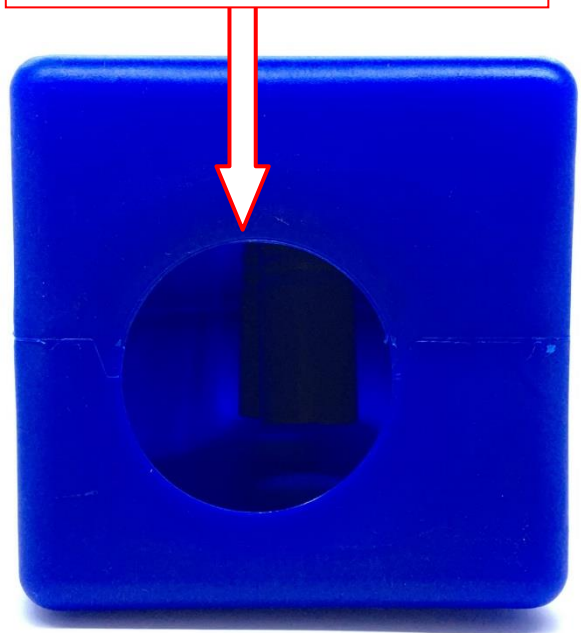

INLET SILENCER SPONGE FILTER

EITHER SPONGE FILTER IS PERMITTED FOR USE
USE OF A FILTER IS COMPULSORY

RED (CORSE)




GREEN (FINE)



PHOTO IDENTIFICATION CARBURETTOR INLET CONVEYOR

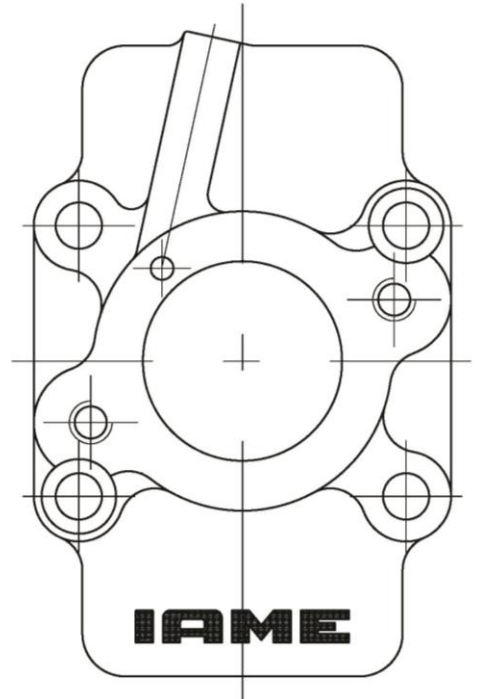Old version



ALTERNATIVE

New version



NEW LOGO

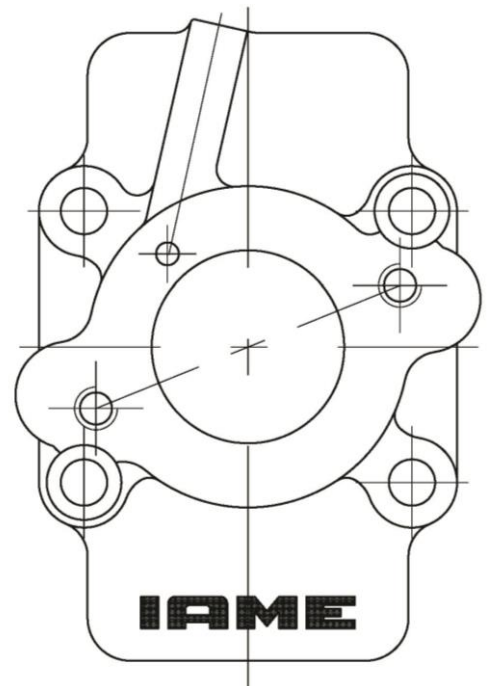





PHOTO IDENTIFICATION REED GROUP

CURRENT VERSION





ALTERNATIVE VERSION



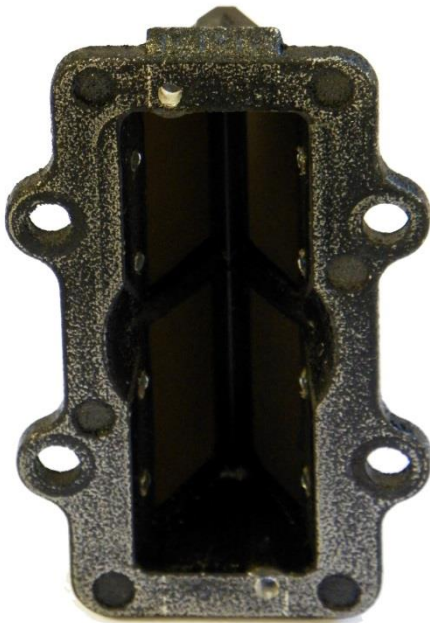NEW LOGO



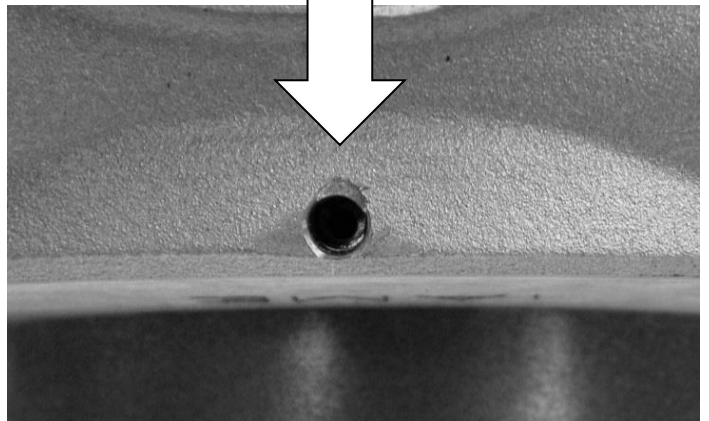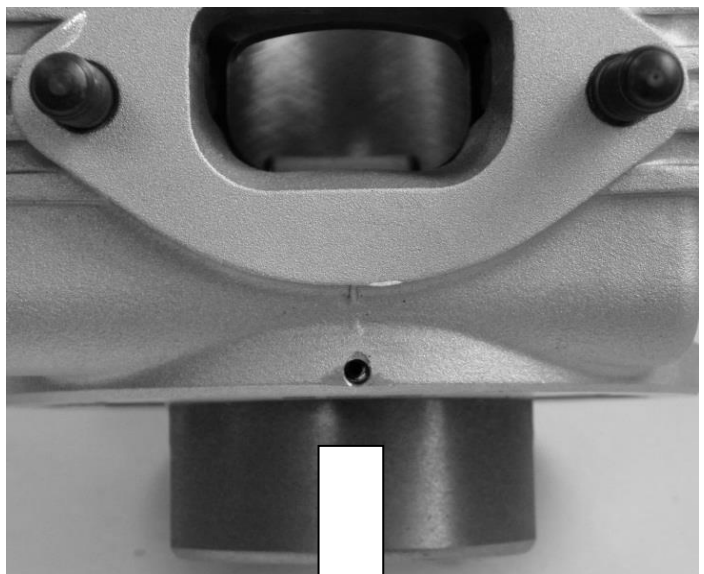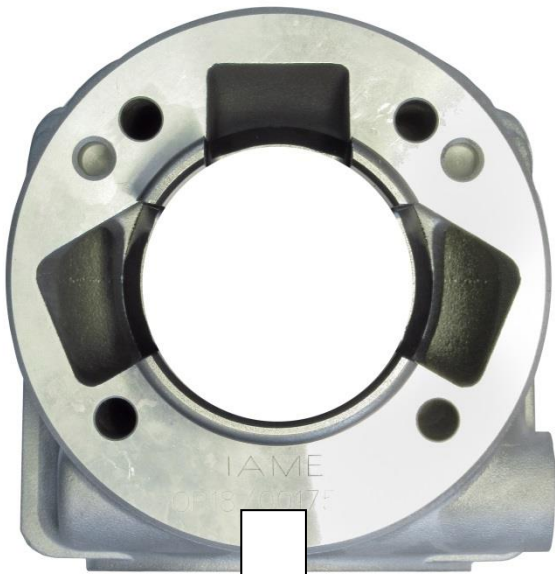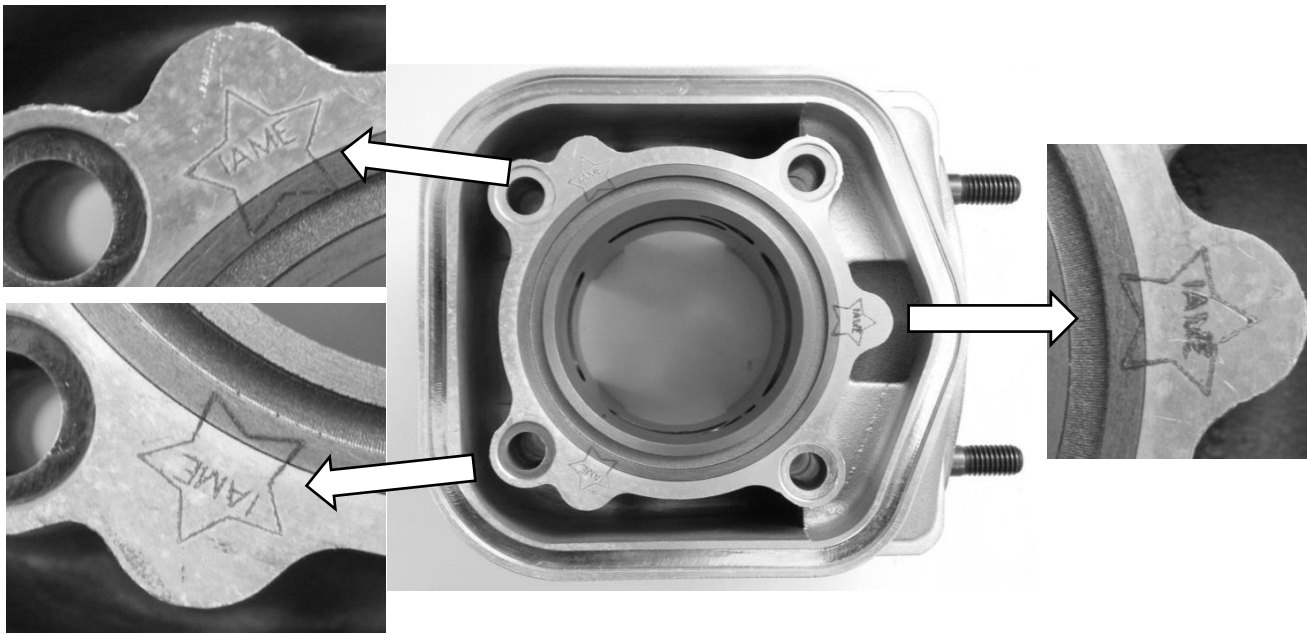CYLINDER IDENTIFICATION MARKING (since 2014)



VARIABLE



CARBURETTOR - Tillotson HW-27A

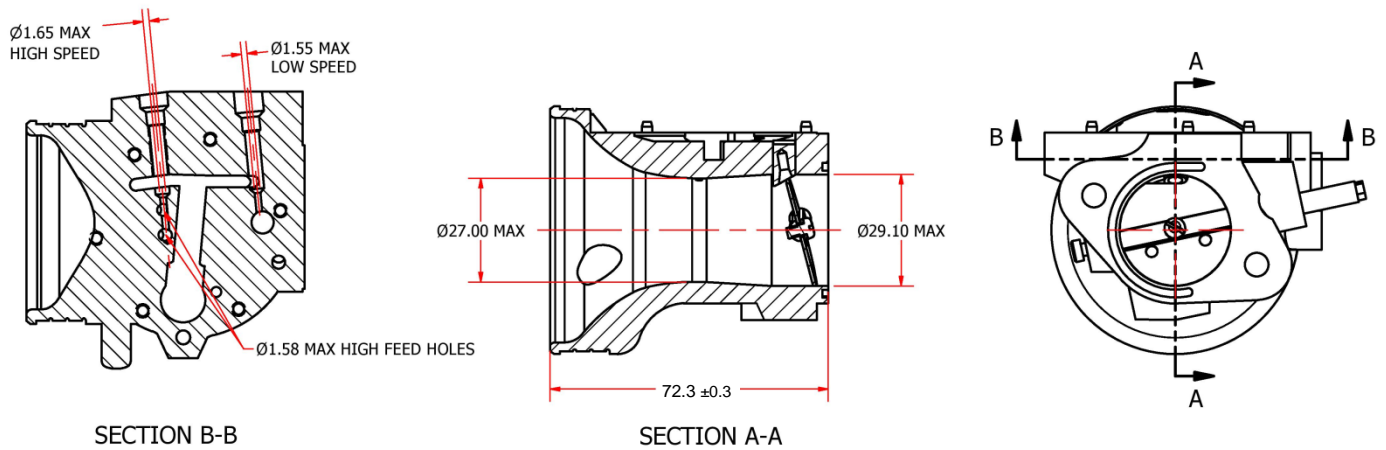


PHOTO OF ADJUSTING SIDE


PHOTO OF INLET SIDE

Manufacturer	TILLOTSON LTD.
Make	TILLOTSON
Model	HW-27A

SECTION VIEW




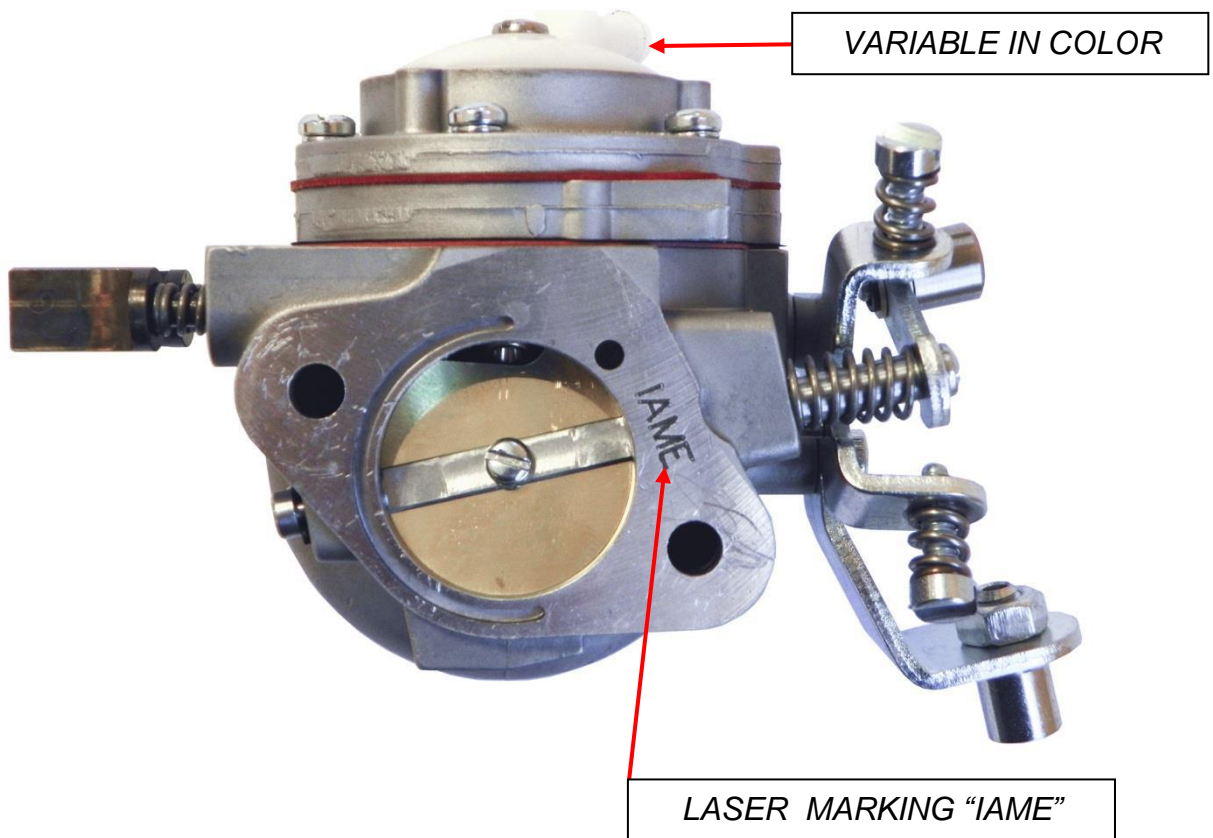MARKING



CARBURETTOR DESCRIPTION AND SKETCH OF PARTS

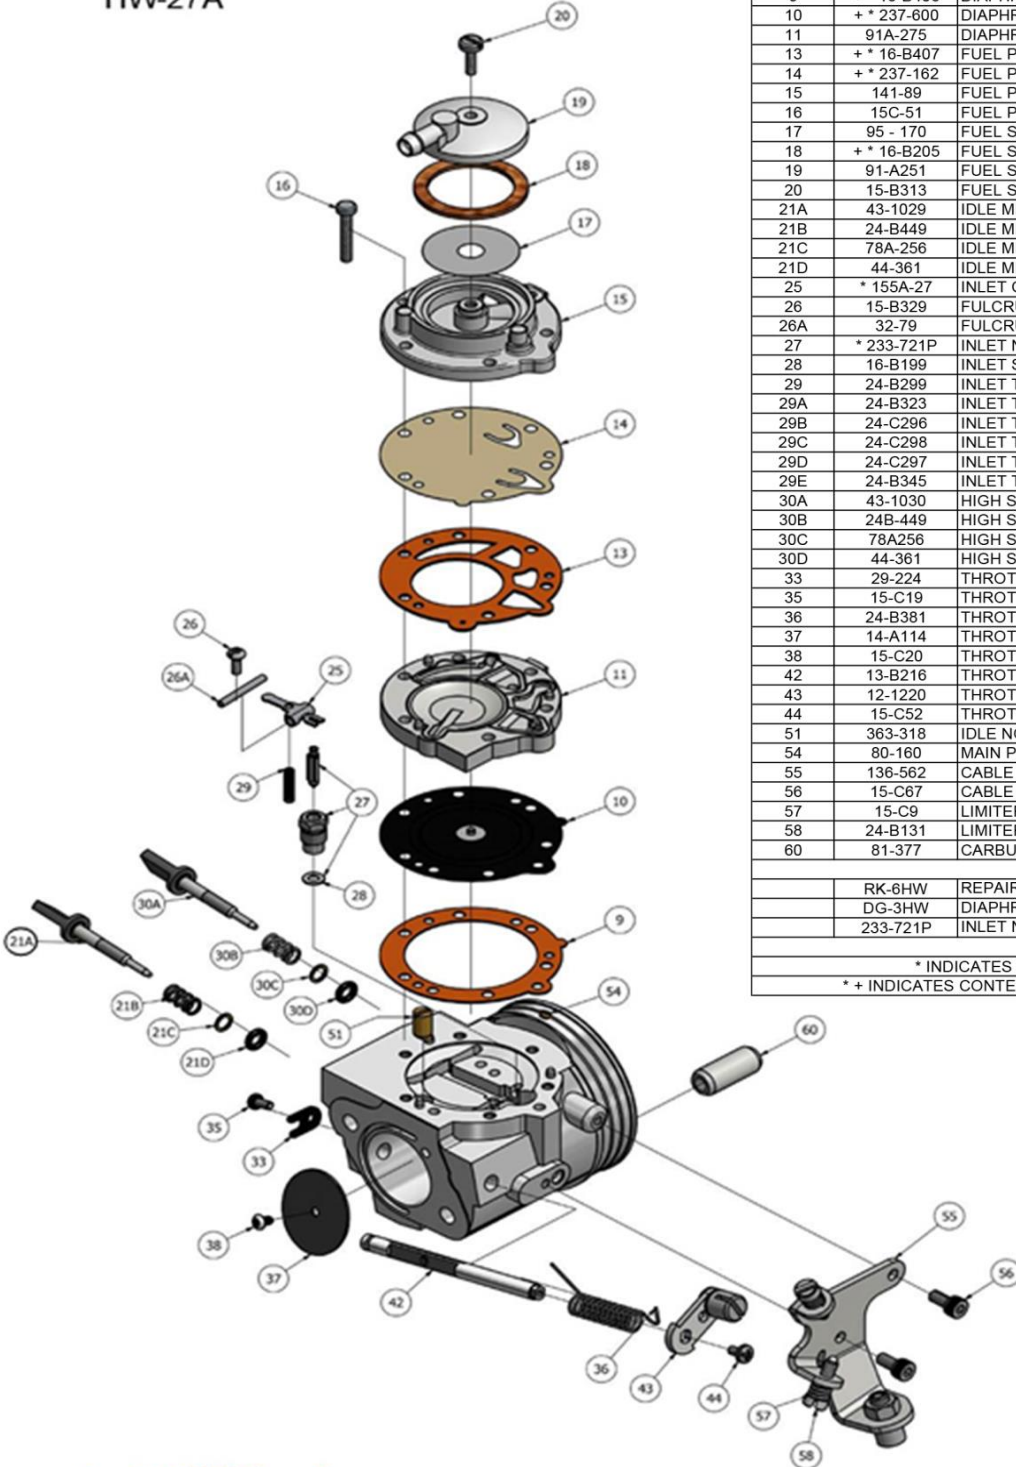HW-27A



ITEM	PART NO:	DESCRIPTION	QTY
9	+ * 16-B406	DIAPHRAGM GASKET (ORANGE)	1
10	+ * 237-800	DIAPHRAGM	1
11	91A-275	DIAPHRAGM COVER	1
13	+ * 16-B407	FUEL PUMP GASKET (ORANGE)	1
14	+ * 237-162	FUEL PUMP DIAPHRAGM	1
15	141-89	FUEL PUMP BODY	1
16	15C-51	FUEL PUMP BODY SCREW	6
17	95 - 170	FUEL STRAINER SCREEN	1
18	+ * 16-B205	FUEL STRAINER COVER GASKET	1
19	91-A251	FUEL STRAINER COVER	1
20	15-B313	FUEL STRAINER COVER RETAINING SCREW	1
21A	43-1029	IDLE MIXTURE SCREW	1
21B	24-B449	IDLE MIXTURE SCREW SPRING	1
21C	78A-256	IDLE MIXTURE SCREW WASHER	1
21D	44-361	IDLE MIXTURE SCREW PACKING	1
25	* 155A-27	INLET CONTROL LEVER	1
26	15-B329	FULCRUM LEVER SCREW	1
26A	32-79	FULCRUM LEVER PIN	1
27	* 233-721P	INLET NEEDLE & SEAT SET	1
28	16-B199	INLET SEAT GASKET	1
29	24-B299	INLET TENSION SPRING (STD 37 grams)	1
29A	24-B323	INLET TENSION SPRING (26 grams)	1
29B	24-C296	INLET TENSION SPRING (31 grams)	1
29C	24-C298	INLET TENSION SPRING (42 grams)	1
29D	24-C297	INLET TENSION SPRING (46 grams)	1
29E	24-B345	INLET TENSION SPRING (48 grams)	1
30A	43-1030	HIGH SPEED MIXTURE SCREW	1
30B	24B-449	HIGH SPEED MIXTURE SCREW SPRING	1
30C	78A256	HIGH SPEED MIXTURE SCREW WASHER	1
30D	44-361	HIGH SPEED MIXTURE SCREW PACKING	1
33	29-224	THROTTLE SHAFT CLIP	1
35	15-C19	THROTTLE SHAFT CLIP RETAINING SCREW	1
36	24-B381	THROTTLE RETURN SPRING	1
37	14-A114	THROTTLE SHUTTER	1
38	15-C20	THROTTLE SHUTTER SCREW	1
42	13-B216	THROTTLE SHAFT	1
43	12-1220	THROTTLE LEVER ASSEMBLY	1
44	15-C52	THROTTLE LEVER RETAINING SCREW	1
51	363-318	IDLE NOZZLE	1
54	80-160	MAIN PLUG	2
55	136-562	CABLE BRACKET	1
56	15-C67	CABLE BRACKET RETAINING SCREW	2
57	15-C9	LIMITER SCREW	2
58	24-B131	LIMITER SPRING	2
60	81-377	CARBURETTOR MOUNTING NUT	2
	RK-6HW	REPAIR KIT	
	DG-3HW	DIAPHRAGM & GASKET (STANDARD)	
	233-721P	INLET NEEDLE & SEAT SET	
* INDICATES CONTENTS OF REPAIR KIT			
* + INDICATES CONTENTS OF DIAPHRAGM & GASKET SET			


PARTS OF CARBURETTOR

REF.9 - P. N°16-B406
 DIAPHRAGM GASKET (ORANGE COLOR)



Thickness = 0.5 ± 0.1 mm

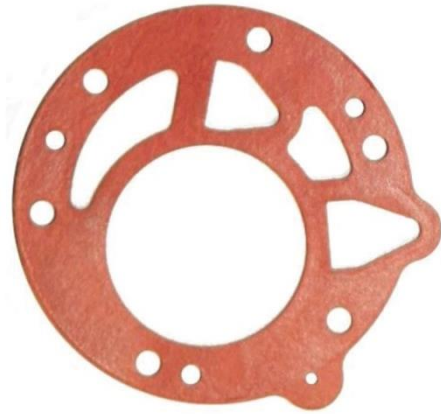REF.13 - P. N° 16-B407
 PUMP DIAPHRAGM GASKET (ORANGE COLOR)



Thickness = 0.8 ± 0.1 mm

REF.10 - P. N°237-600
 DIAPHRAGM



Thickness = 0.13 ± 0.07 mm

REF.14 - P. N°237-162
 PUMP DIAPHRAGM

ALTERNATIVE



Thickness = 0.10 ± 0.063 mm

REF.11 - P. N° 91-A275
 DIAPHRAGM COVER









Thickness = 6.75 ± 0.15 mm

REF.15 - P. N° 141-89
 PUMP COVER



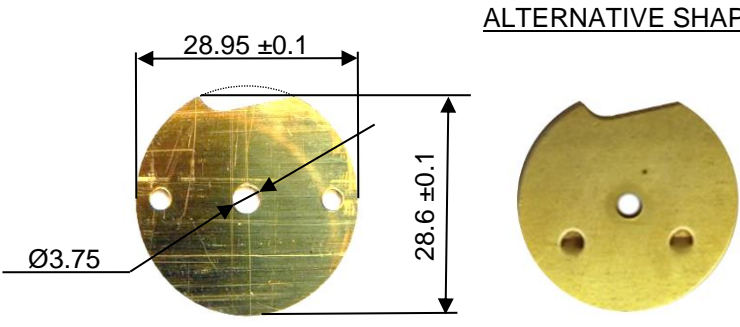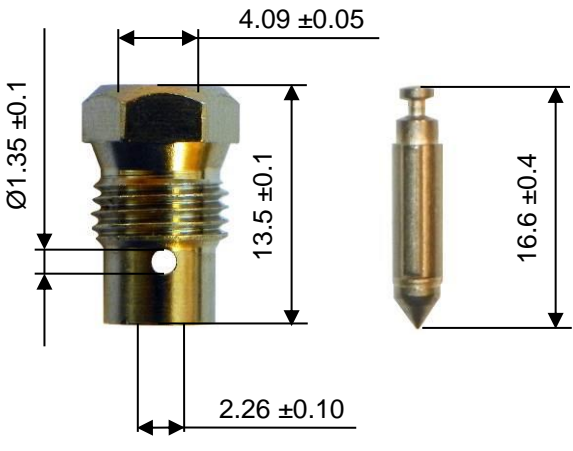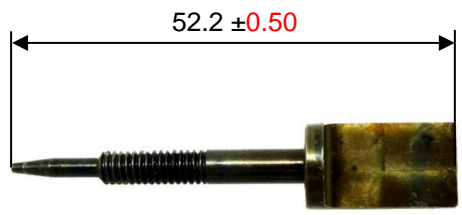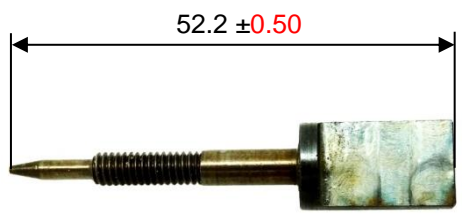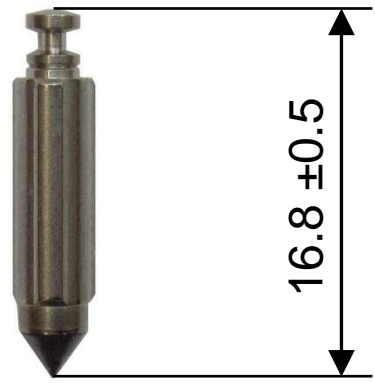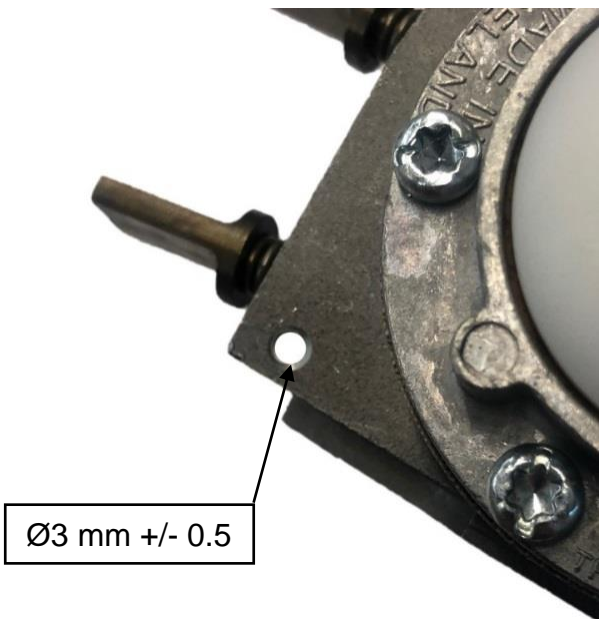Thickness = 12.5 ± 0.15 mm

<p>REF.37 - P. N° 14-A114 THROTTLE SHUTTER</p> <p>ALTERNATIVE SHAPE</p>  <p>Thickness = 0.81 ±0.1 mm</p>	<p>REF.27 - P. N° 233-721P SEAT + NEEDLE</p> 
<p>REF.21A - P. N° 43-1029 NEEDLE LOW SPEED</p> 	<p>REF.30A - P. N° 43-1030 NEEDLE HIGH SPEED</p> 
<p>ALTERNATIVE FUEL NEEDLE</p>	<p>OPTIONAL HOLE FOR SEALING TAG</p>
<p>REF.27 - P. N° 233-721P NEEDLE</p> 	 <p>Ø3 mm +/- 0.5</p>



CARBURETTOR - TRYTON HB 27-C



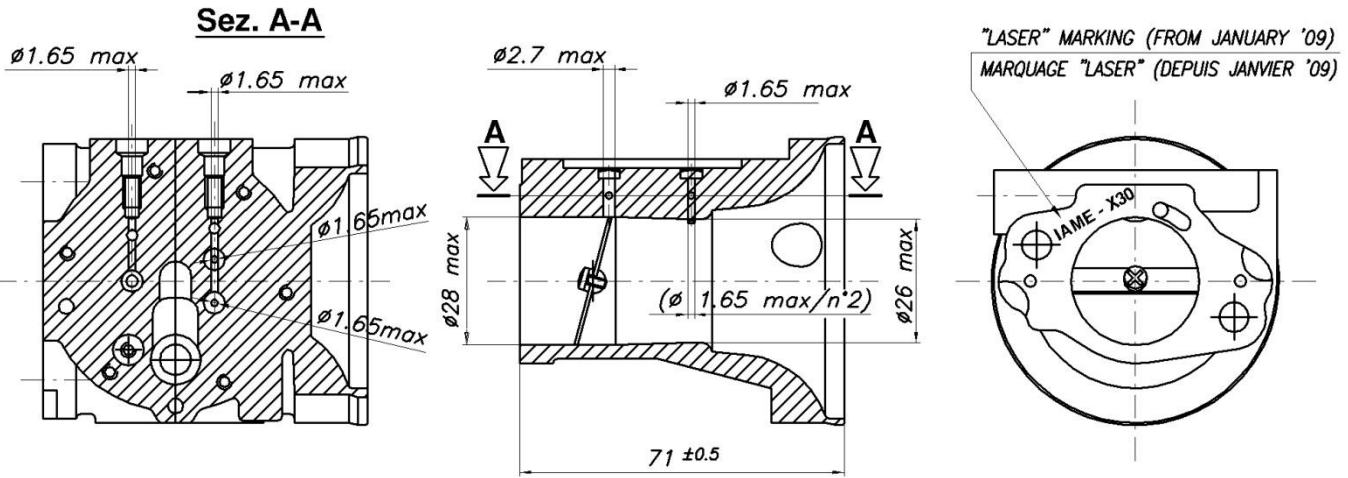
PHOTO OF INLET SIDE



PHOTO OF ADJUSTING SIDE


Manufacturer	VA.MEC SRL
Make	TRYTON
Model	HB 27-C





SECTION VIEW



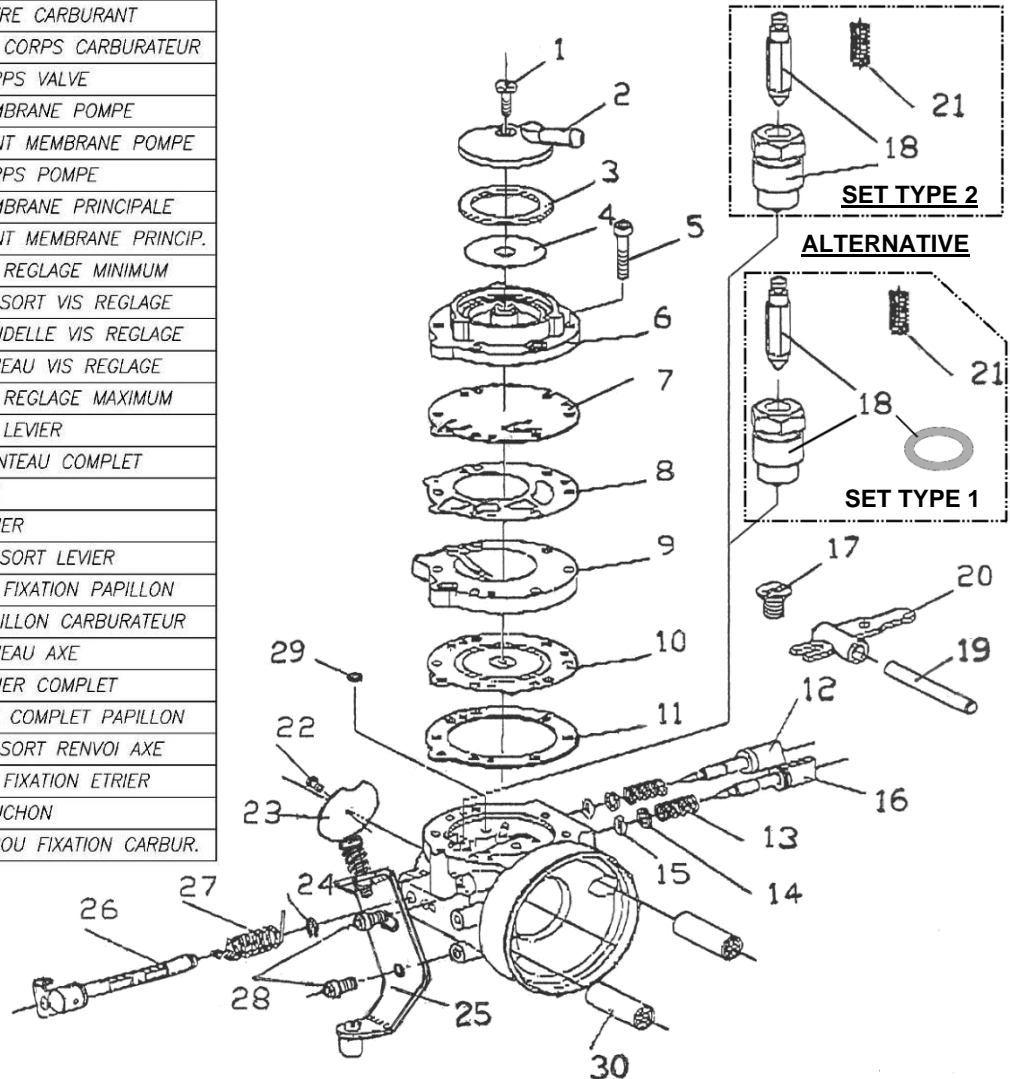
CARBURETTOR DESCRIPTION AND SKETCH OF PARTS

Rif.	DESCRIPTION	
1	COVER SCREW	VIS COUVERCLE
2	FILTER COVER	COUVERCLE FILTRE
3	COVER GASKET	JOINT COUVERCLE
4	FUEL SCREEN FILTER	FILTRE CARBURANT
5	BODY SCREW	VIS CORPS CARBURATEUR
6	VALVE BODY	CORPS VALVE
7	PUMP DIAPHRAGM	MEMBRANE POMPE
8	PUMP DIAPHRAGM GASKET	JOINT MEMBRANE POMPE
9	PUMP BODY	CORPS POMPE
10	DIAPHRAGM	MEMBRANE PRINCIPALE
11	DIAPHRAGM GASKET	JOINT MEMBRANE PRINCIP.
12	NEEDLE LOW SPEED	VIS REGLAGE MINIMUM
13	NEEDLE SPRING	RESSORT VIS REGLAGE
14	NEEDLE WASHER	RONDELLE VIS REGLAGE
15	NEEDLE O-RING	ANNEAU VIS REGLAGE
16	NEEDLE HIGH SPEED	VIS REGLAGE MAXIMUM
17	SCREW LEVER	VIS LEVIER
18	NEEDLE VALVE	POINTEAU COMPLET
19	LEVER PIN	AXE
20	INLET LEVER	LEVIER
21	INLET LEVER SPRING	RESSORT LEVIER
22	THROTTLE SHUTTER SCREW	VIS FIXATION PAPILLON
23	THROTTLE SHUTTER	PAPILLON CARBURATEUR
24	SHAFT RETAINING RING	ANNEAU AXE
25	BRACKET	ETRIER COMPLET
26	SHAFT SHUTTER	AXE COMPLET PAPILLON
27	SHAFT SPRING	RESSORT RENVOI AXE
28	BRACKET SCREW	VIS FIXATION ETRIER
29	PLUG	BOUCHON
30	BOLT	ECROU FIXATION CARBUR.

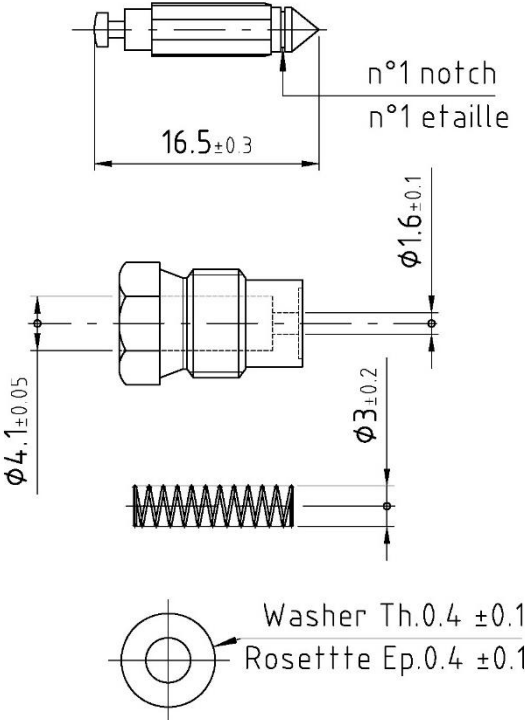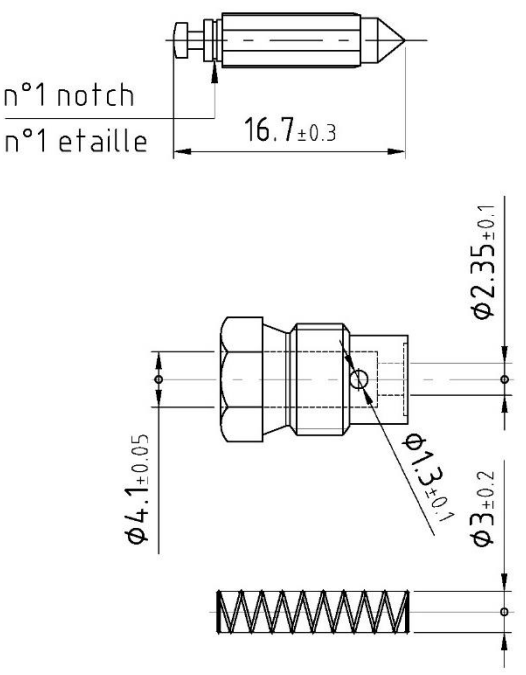


SET TYPE 1	SET TYPE 2
 <p>Technical drawing of Set Type 1 components. The top part shows a side view of a tapered pin with a length of 16.5 ± 0.3 and a notch labeled "n°1 notch" and "n°1 etaille". Below it is a cross-sectional view of a nut with a diameter of $\phi 4.1 \pm 0.05$ and a central hole diameter of $\phi 3 \pm 0.2$. A separate view shows a spring with a diameter of $\phi 1.6 \pm 0.1$. At the bottom, a washer with thickness $Th. 0.4 \pm 0.1$ and a rosette with edge thickness $Ep. 0.4 \pm 0.1$ are shown.</p>	 <p>Technical drawing of Set Type 2 components. The top part shows a side view of a tapered pin with a length of 16.7 ± 0.3 and a notch labeled "n°1 notch" and "n°1 etaille". Below it is a cross-sectional view of a nut with a diameter of $\phi 4.1 \pm 0.05$ and a central hole diameter of $\phi 3 \pm 0.2$. A separate view shows a spring with a diameter of $\phi 2.35 \pm 0.1$. A detail view of the nut shows a chamfered edge with a diameter of $\phi 1.3 \pm 0.1$. At the bottom, a washer with thickness $Th. 0.4 \pm 0.1$ and a rosette with edge thickness $Ep. 0.4 \pm 0.1$ are shown.</p>
PHOTO IDENTIFICATION SET TYPE 1	PHOTO IDENTIFICATION SET TYPE 2
 <p>Photograph of Set Type 1 components, showing the tapered pin, nut, spring, washer, and rosette.</p>	 <p>Photograph of Set Type 2 components, showing the tapered pin, nut, spring, washer, and rosette.</p>

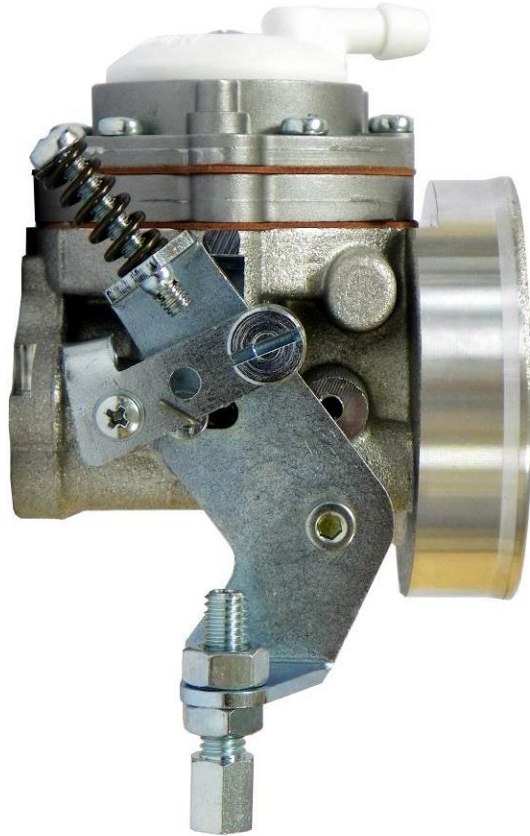BRACKET CABLE & LIMITER



IN ALTERNATIVE

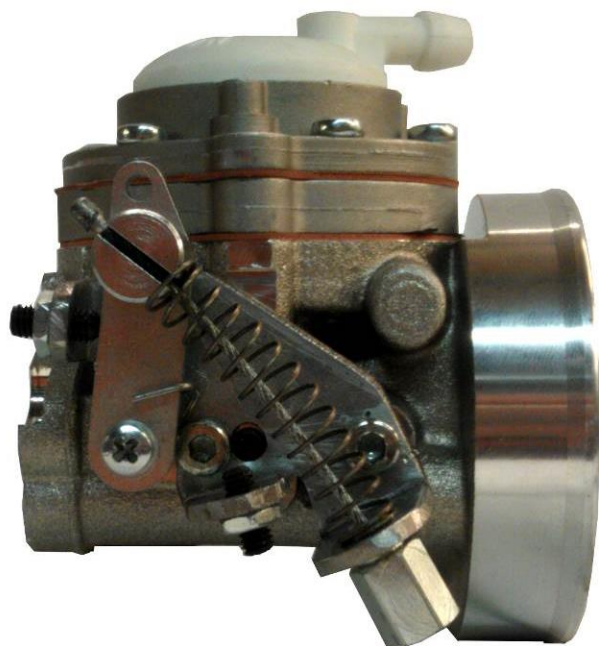

Appendix to the IAME X30 125 Homologation Documents

The following notes are additional to the details contained in these homologation documents for the IAME X30 125 engine (the “Engine”) and are to be read in conjunction with the specifications and details contained therein; they form part of the Homologation Documents for the Engine.

The Engine must at all times be used and presented in strict conformity with the specifications detailed in the homologation documents. All engines must be imported into Australia by Remo Racing Pty Ltd; engine numbers will be recorded. **Unless otherwise expressly permitted by KNSW, the Engine must use only IAME OEM parts in accordance with this Homologation Document.**

Neither the Engine nor any of its ancillary components may be modified other than in accordance with the rules and these homologation documents.

Any removal, addition or polishing of material is strictly forbidden. Sandblasting, glass bead blasting, peening, acid etching, spark eroding and/or any other method of metal removal or displacement is not allowed.

The use of thermal barrier coatings/ceramic coatings on or in the Engine/Engine components and on or in exhaust components is prohibited.

The use of anti friction coatings on or in the Engine/Engine components is prohibited. OEM pistons are exempt.

UNLESS IN THE KNSW RULES AND/OR THESE HOMOLOGATION DOCUMENTS IT SAYS THAT YOU CAN, THEN YOU CANNOT.

The Engine is approved for use in the following classes:

- X30
- X30 Junior
- TaG 125
- TaG 125 Restricted
- Junior Performance
- Open Performance

A. Cylinder

1. All ports must be of intended design as manufactured and conforming to the homologation drawings.
2. No modifications or grinding to the ports is allowed.
3. Water connections to the cylinder are free but must retain the homologated position and threaded sizes.

B. Base Gaskets

1. The type of material is a non-tech item.
2. The base gasket/gaskets must be a minimum of 0.30mm and a maximum of 0.45mm.
3. More than 1 base gasket can be used.

C. Cylinder Head

1. Cylinder Head must be of original Engine manufacturer and conform to homologation drawings.
2. No material to be added except for spark plug thread repair.
3. Distance from spark plug sealing face to combustion chamber ceiling face 29.3mm+/- 0.25mm.
4. The combustion chamber volume shall be a minimum of 10.3cc **using the KA Type 1 CC plug.**
5. **The combustion chamber volume in the cylinder head (with Volumeter & KA Type 1 CC plug): 12.8 cm³ min.**
6. Water connections to the cylinder head are free but must retain the homologated position and threaded sizes.
7. Cylinder head profile must not vary from the original profile and will be checked with the IAME Cylinder Head Profile Gauge (part number ATT-025/1).

D. Squish Gap

1. The Cylinder Head Squish clearance shall be a minimum of 0.9mm as per homologation.
2. Squish shall be measured using digital verniers and 2mm solder wire (tin).
3. When inserted in the cylinder the Engine shall be rotated until the solder is squeezed between the head and piston crown.
4. Measure the thickness of the flat section closest to the step formed by the piston ring using the thin tip of the caliper jaws.
5. The process shall be conducted on both the right and left-hand side of the engine parallel to the piston pin.
6. The two measurements shall be averaged out and must equal no less than 0.9mm.

E. Crankcase, Crankshaft and Con Rod

1. Must be of original Engine manufacturer and conform to homologation drawings.
2. It is permissible to hard chrome the crankshaft in the areas highlighted in the homologation documents to restore the surface to original factory specification.

F. Piston

1. Piston must be of original manufacturer, supplied by IAME with "IAME SUD" marking on dome and conform to homologation drawings. No modifications are permitted.

G. Piston Pin

1. No special alloys are allowed, must be of magnetic material and comply with the drawing as supplied by the manufacturer.

H. Clutch

1. Must be of original manufacturer and conform to the homologation drawings and display original IAME X30125840 or IAME X30125841 markings on the clutch hub. No modifications are permitted.
2. Both the X30125550 and X30125550A clutch drum may be used and are interchangeable with the clutch hubs listed above.

I. Reed Block, Reed Valves and Inlet Conveyor

1. The only reed petals to be used are the genuine IAME Fibreglass (Vetronite) or genuine IAME Carbon Fibre Reed Petals; both with IAME markings.
2. Fibreglass Reed Petals are to be a minimum thickness of 0.3mm; Carbon Fibre Reed Petals are to be a minimum thickness of 0.22mm.
3. Reed block must be original as supplied by IAME.
4. It is permissible to alter the inlet conveyor to conform to the maximum dimension of 29.3mm as detailed in the homologation.

J. Carburettor

1. No sleeving of the carburettor throttle bore is permitted.
2. Adjustment of carburettor jet needles must be done by manually turning the jet needle (or its extension) only. It is permissible to fit a second O-Ring on the jet needles to prevent rotation due to vibrations.
3. It is permissible to mount the carburettor upside-down to provide easier access to the jet needles for the driver.
4. Carburettor throttle cannot be actuated by electro mechanical means.
5. It is permissible to fit a mechanical stop to limit the range of carburettor jet needle movement; however, no modifications to the carburettor are permitted to mount such a stop.
6. The only permissible carburettor kits for use with the Tillotson HW27A are the DG-3HW Gasket & Diaphragm Kit and the RK-6HW Repair Kit; all spare parts must be genuine Tillotson.
7. The carburettor kit, inlet needle & seat for the Tryton HB27 are a non-tech item.
8. It is permissible to bend the carburettor inlet lever to alter the lever height.
9. The protrusion on the carburettor top plates may be removed to allow more secure fitment of the airbox rubber as pictured:



A. Top plate showing protrusion



B. Top plate with protrusion removed

K. Induction Silencer

1. The only permissible induction silencer is the square style Socorem as per homologation drawings and can be of any colour.
2. Minimum tube length 94.5mm.
3. It is permissible to drill a maximum 5mm water drain hole in the bottom of the induction silencer.
4. The only internal filter that may be used in the Induction Silencer/Air Box is the genuine IAME filter as detailed in the homologation; use of this filter is compulsory.

L. Ignition

1. The woodruff ignition rotor key must be retained and may not be modified.
2. The Spark plug cap must incorporate a minimum of a 5kΩ resistor.
3. The only Selettra ignition module to be used is the green module marked with AKA20L.
4. The only PVL ignition coil to be used is the blue module marked with AKA20L.
5. The blue Selettra ignition coil must be marked with AKA20L.
6. Spark plug "crush" washer may be removed only when using a head temperature sensor.
7. In the event of required repairs the plastic fittings registered and homologated as parts of the electrical systems are permitted to be replaced with non-supplied fittings.

M. Exhausts

1. The only permissible exhaust systems are as supplied from IAME; they must carry the IAME identification markings and conform to the drawings in the homologation papers.
2. Mixing of Type 1 & Type 2 exhaust system components is prohibited.
3. An O2 probe/fitting is allowed to be fitted to the muffler as per the homologation document. Both locations may have a fitting installed simultaneously but only one (1) may be fitted with an O2 probe. Fittings without a sensor installed must be sealed with a blanking plug.

N. Header Pipe

1. The only permissible header pipe for use with the Type 1 exhaust system is as supplied by IAME and must carry the IAME identification.
2. It is permissible to fit a maximum of three separate flange support brackets to the original header, any such support flange must not exceed 60mm maximum in total length, and not exceed 40mm maximum in total width.
3. An O2 probe/fitting is allowed to be fitted to the header pipe in accordance with the KA Manual.

O. Cooling System

1. The only permissible thermostat is the original IAME component (part number T-8400-C) as supplied with the Engine.
2. The use of racing tape or similar as an air flow restriction device is permitted. Tape may be removed at any time but must remain with the kart and cannot be discarded on the circuit.
3. It is permissible to fit a sealed recovery tank with a minimum capacity of 25mL such as the one pictured below to make the water cooling system a sealed unit.



A. Recovery Tank



B. Mounted Vertically




C. Mounted Horizontally

P. Non-Tech Items

1. Unless otherwise specified, non-tech items are to be of the same type and style as the original. No alteration from the original manufacturer specifications are permitted to fit a non-tech item.
2. Stickers that may be removed when requested by the technical inspector are allowed on the Engine, induction silencer and radiator.
3. Engraving, stamping or marking an Engine for identification purposes is permitted. Any such engraving, stamping or marking must not obscure any homologation or identification markings on the Engine or its ancillary components.
4. Non-tech items for the IAME X30 Engine include:
 Gaskets, Seals, Big & Little End Roller Cages, Fasteners, Washers, Spark Plug, Spark Plug Lead, Spark Plug Resistor Cap, 6206 Ball Type Main Bearings, Water Hoses, Hose Clamps, Water Pump, Axle O-Ring, Axle Pulley, Exhaust Flex, Tryton carburettor gasket/diaphragm repair kit including needle and seat, start/stop buttons, plastic fittings and terminals of the wiring looms and connected component.

2024 Updates	
Section	Page
Clarification of alternative CC measurement using Volumeter	6, 10, 72
Measurement of crankshaft with roller bearings fitted	16
Alternative airbox outlet location	57
Increased tolerance on HW carby jet length	66
Spark plug “crush” washer removal circumstances	73
Additional checking tools added	81, 82

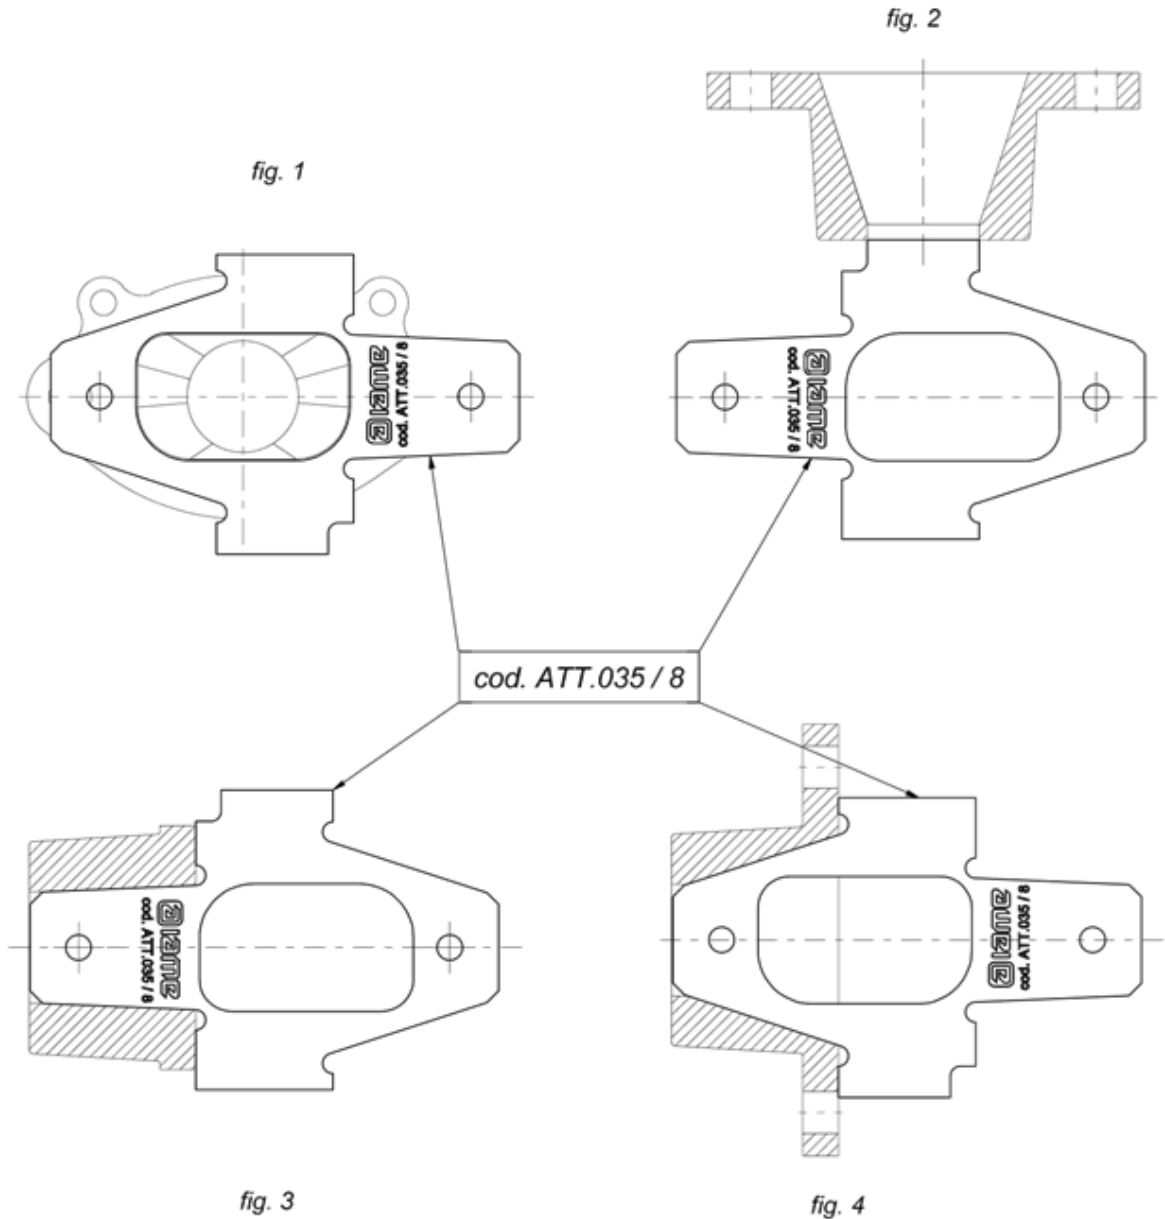
**“NO GO” GAUGE & PROFILE CHECKING TOOL
 EXHAUST MANIFOLD WITH RESTRICTOR Ø22mm**



The National Technical Commissioner and State Technical Commissioners/State Scrutineer's are supplied with a "No Go" Gauge & Profile Checking Tool that is manufactured by IAME. They are to be used as indicated herein.

- 1. CHECK THAT THE NO-GO GAUGE DOES NOT ENTER INTO THE EXHAUST RESTRICTOR - (fig.2)**
- 2. CHECK THAT THE TOOL MATCHES THE SHAPE OF THE EXHAUST MANIFOLD - (fig.1,3 and 4)**
- 3. CHECK THAT THE TOOL DOES NOT PROTRUDE PAST THE FACE OF THE MANIFOLD - (fig.3 and 4)**

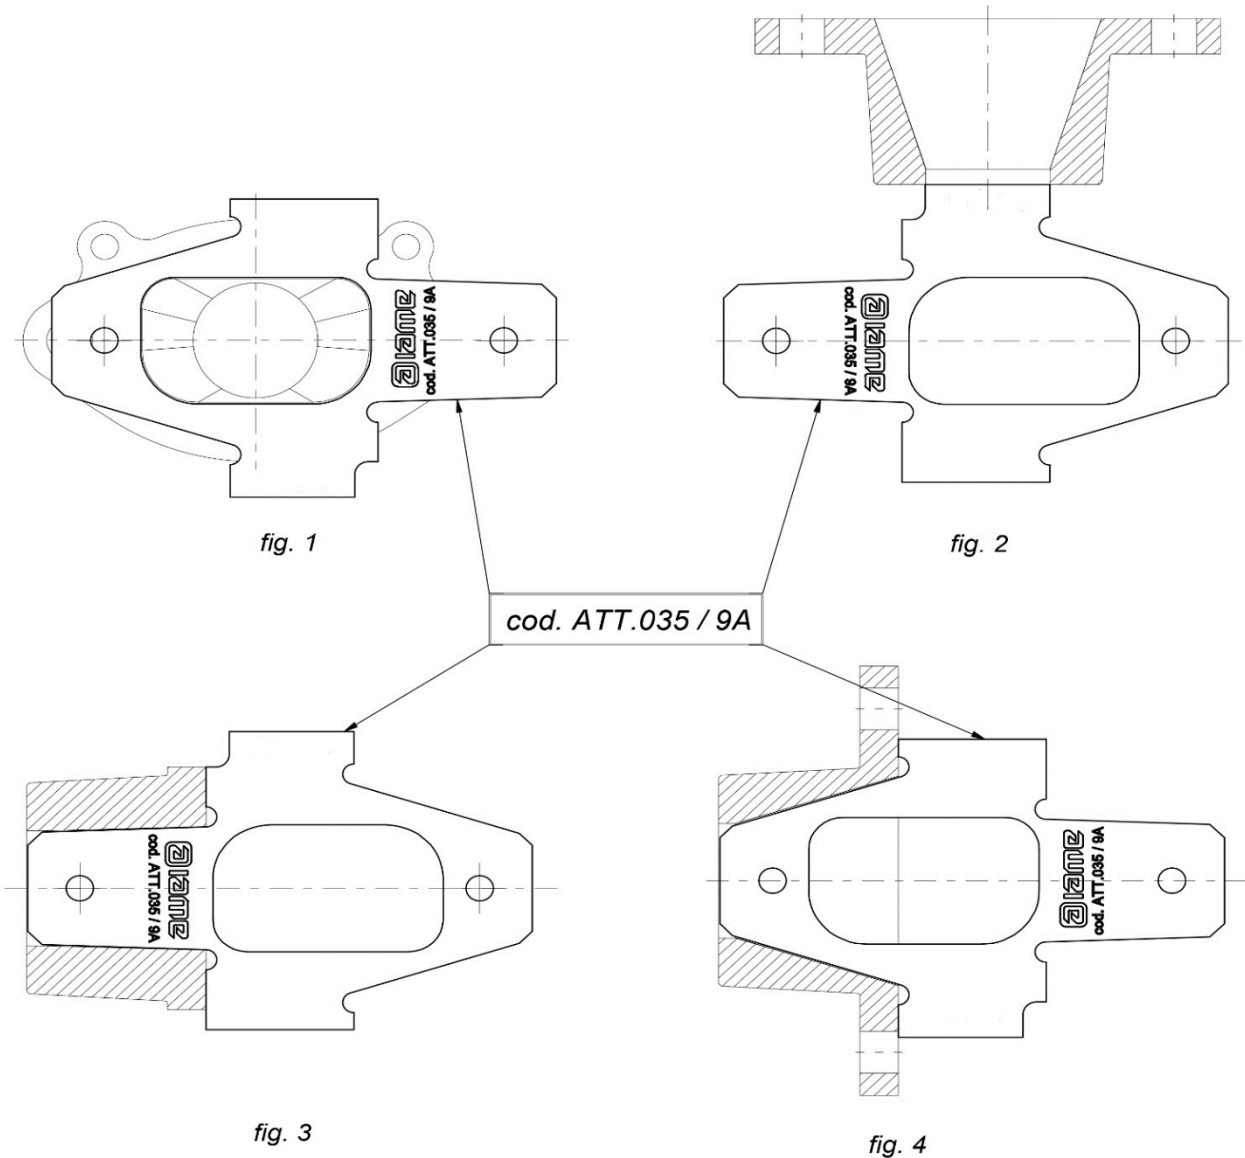
**“NO GO” GAUGE & PROFILE CHECKING TOOL
 EXHAUST MANIFOLD WITH RESTRICTOR Ø22.8mm**




The National Technical Commissioner and State Technical Commissioners/State Scrutineer's are supplied with a "No Go" Gauge & Profile Checking Tool that is manufactured by IAME. They are to be used as indicated herein.

- 1. CHECK THAT THE NO-GO GAUGE DOES NOT ENTER INTO THE EXHAUST RESTRICTOR - (fig.2)**
- 2. CHECK THAT THE TOOL MATCHES THE SHAPE OF THE EXHAUST MANIFOLD - (fig.1,3 and 4)**
- 3. CHECK THAT THE TOOL DOES NOT PROTRUDE PAST THE FACE OF THE MANIFOLD - (fig.3 and 4)**

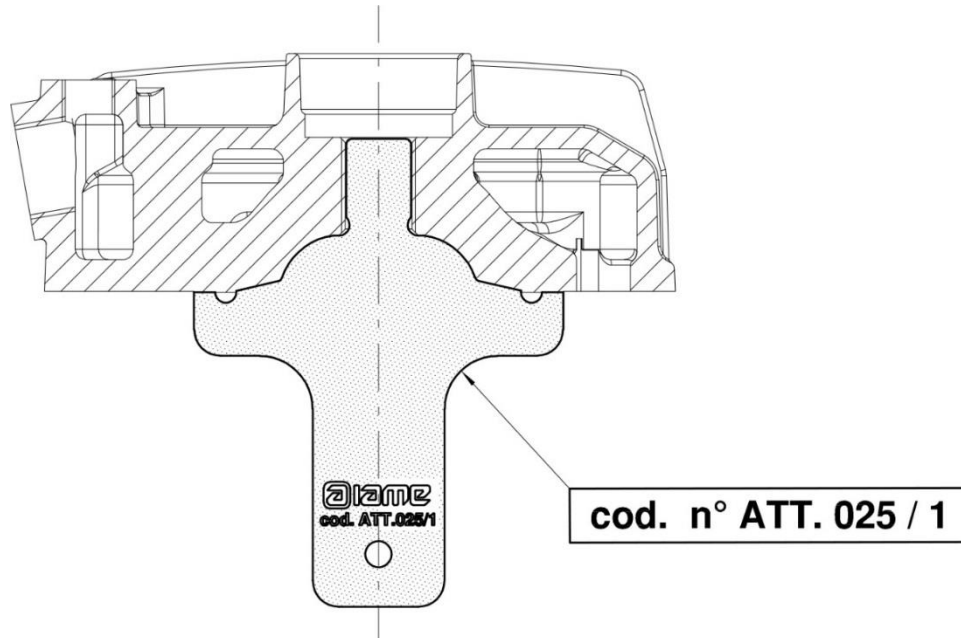
HEAD DOME PROFILE GAUGE




REED VALVE PLANE CONTROL TEMPLATE

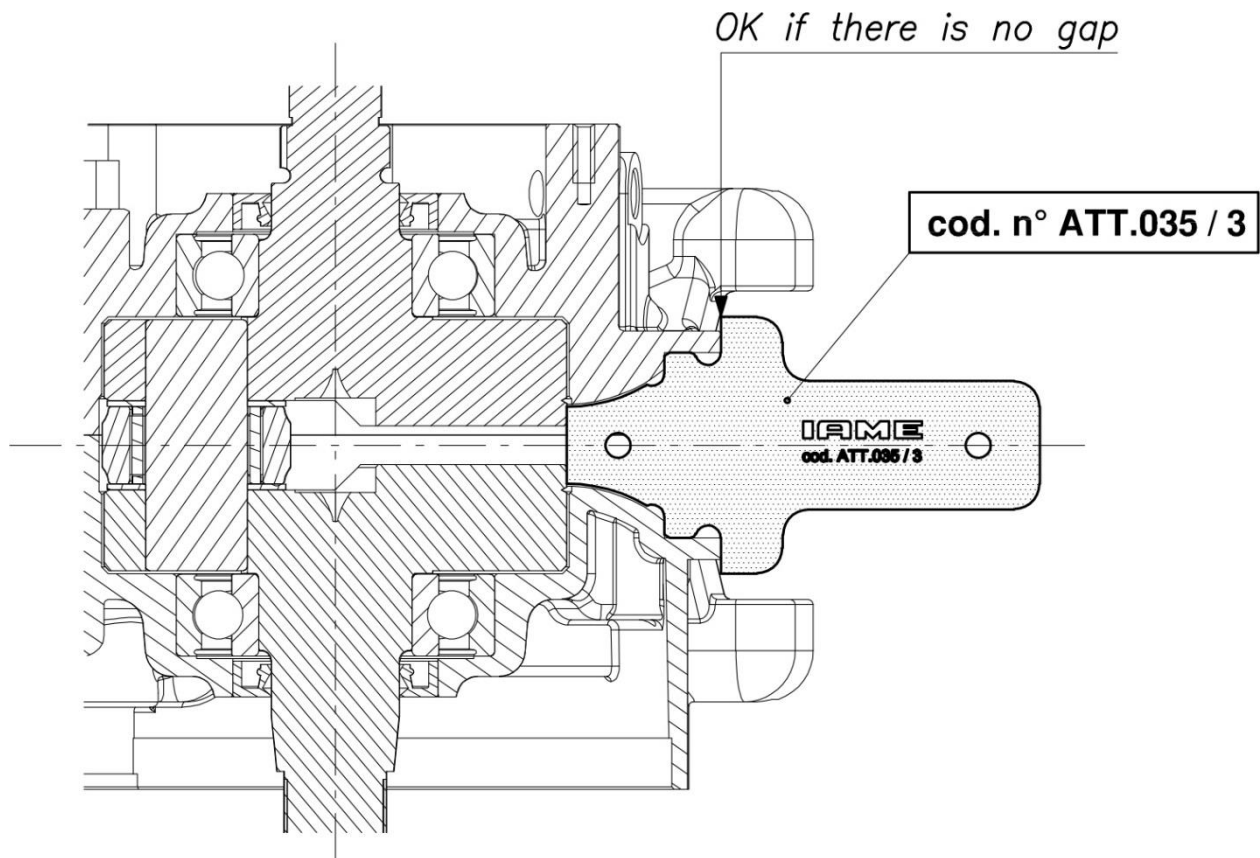

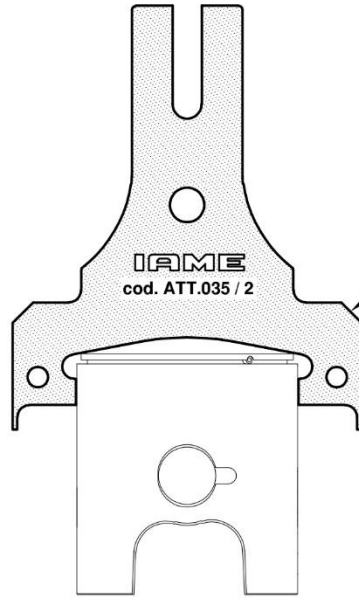CARBURETTOR, DRUM AND PISTON CHECKING TOOL




cod. n° ATT. 035 / 2

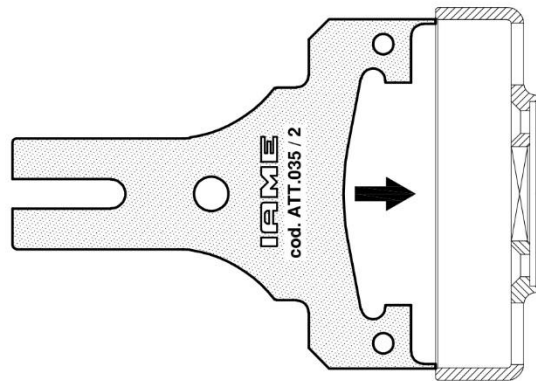


DOES NOT PASS INTERNAL CLUTCH DRUM

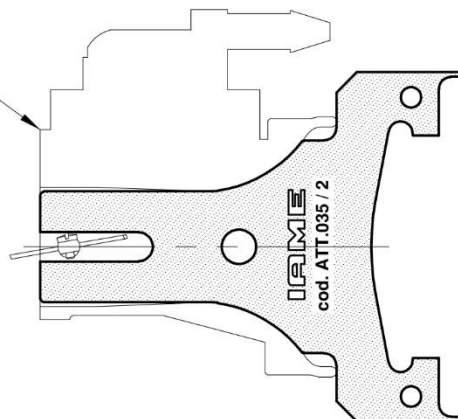
Carburettor Tillotson HW-27A



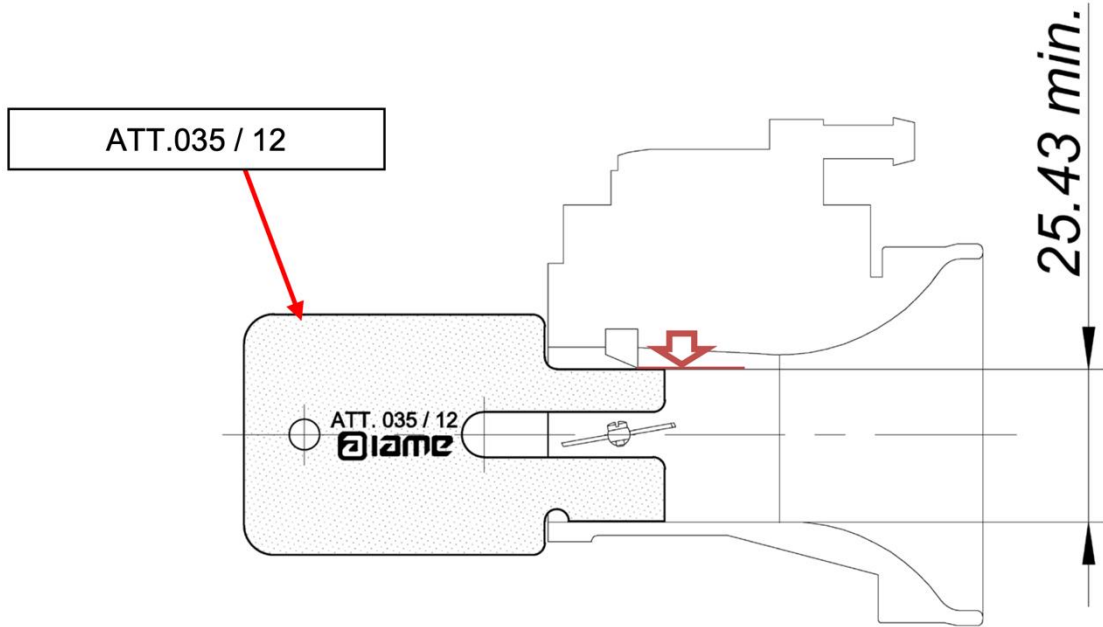
CHECK THE MINIMUM HIGHT OF ATOMIZER – GO IF IT’S OK



CHECK HOLE OF ATOMIZER

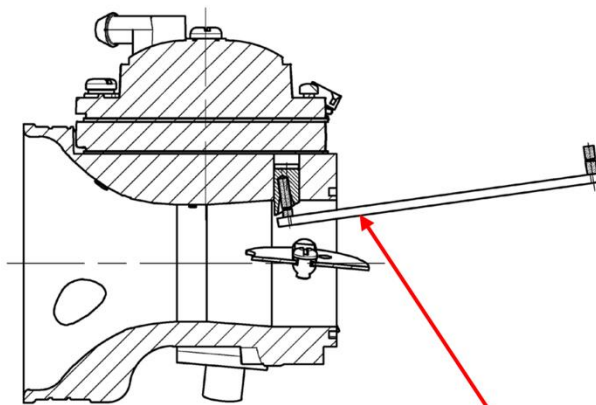


ATT.035 / 19

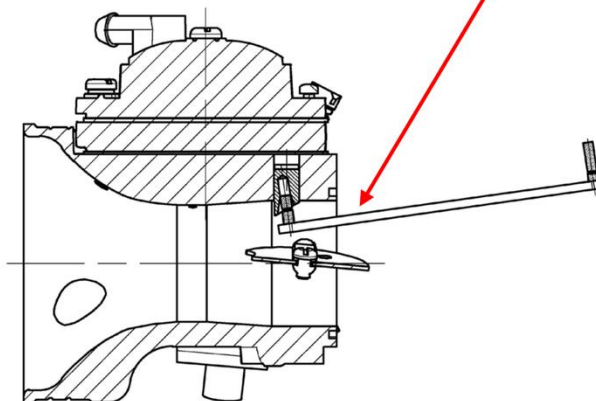


CRANKCASE TOP FACE CHECKING TOOL

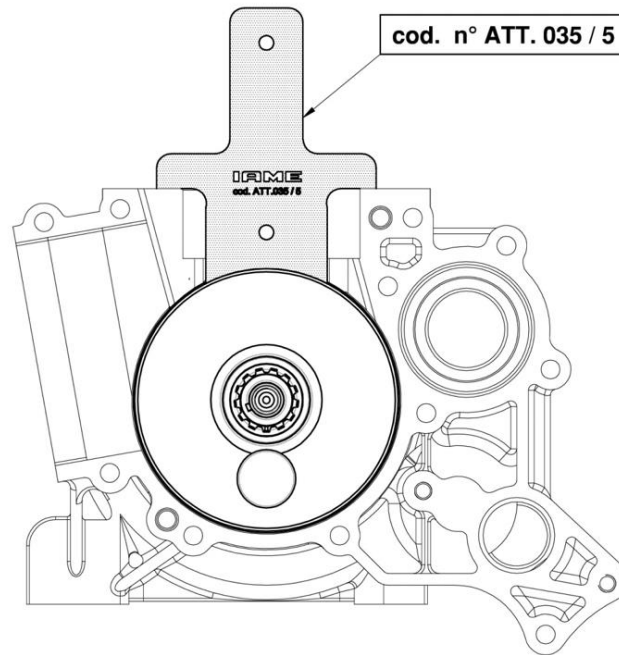Tool is placed into crankcase on top of the crankshaft, edges of tool must contact top surface of crankcase.




CRANKCASE WIDTH CHECKING TOOL

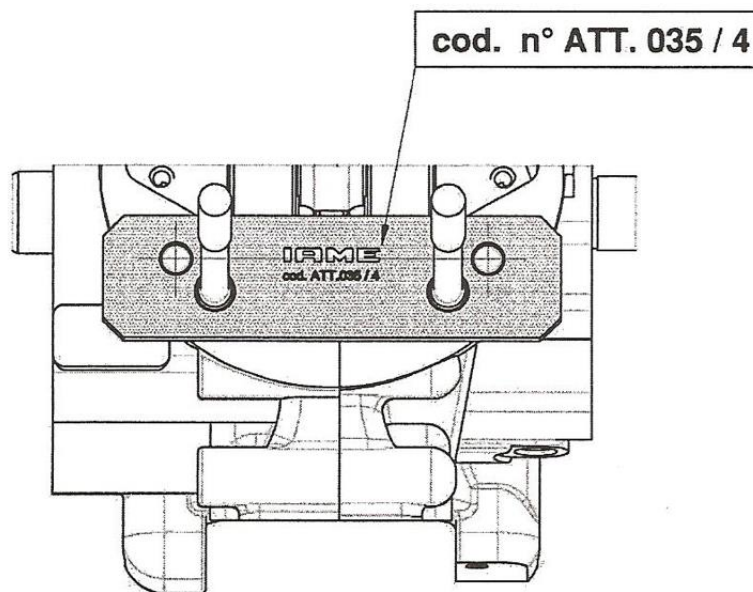Tool fits over crankcase studs & dowel pins to check crankcase width is correct.



HEAD VOLUME CHECKING TOOL (VOLUMETER)

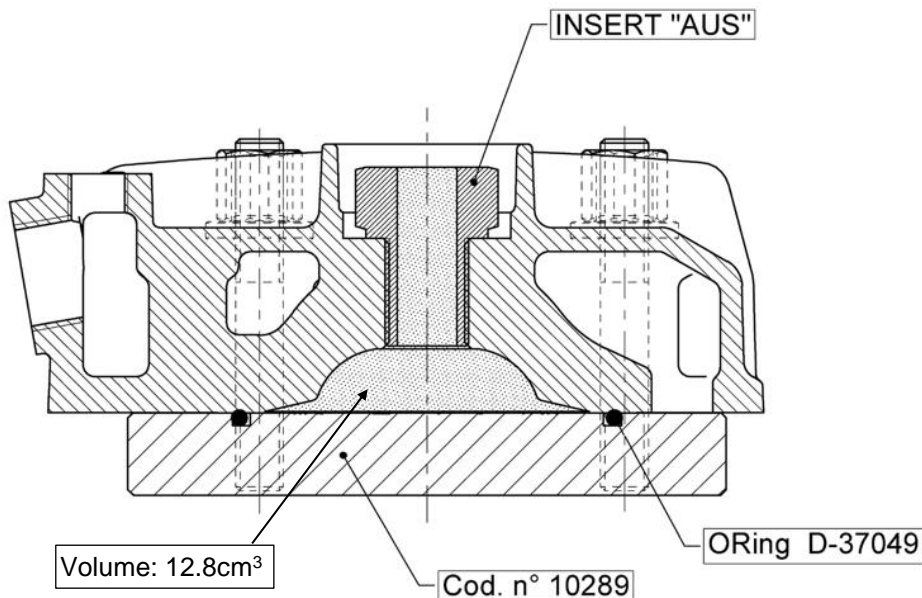Bolt volumeter to bottom of head to check the volume of the cylinder head when removed from engine.



SELETTA DIGITAL "S" (BLUE STATOR) TIMING MARK CHECKING TOOL

Tool is placed into the holes in the rotor, timing mark should be hidden under the tool and not be visible in the cut-out section.

